

**EAST SUSSEX**  
(comprising Brighton and Hove  
and East Sussex)

Mineral Resource Information in Support of National,  
Regional and Local Planning  
**Mineral Resources**  
Scale 1:100 000

Compiled by F.M. McEvoy, A.J. Bloodworth, D.G. Cameron, E.L. Bartlett, S.F. Hobbs, G.K. Lott,  
D.J. Evans, E.J. Stoddart and D.E. Higley.  
Project Leader: D.E. Higley.  
Digital cartography by N.A. Spencer, British Geological Survey,  
Published 2002.  
This map comprises part of a summary of the 'Mineral Resources of South East England Region'.  
For further information see www.mineralsUK.com

**BIBLIOGRAPHIC REFERENCE**

McEvoy, F.M., and 8 others. 2002. Mineral Resource Information in Support of National, Regional and Local Planning: East Sussex (comprising Brighton and Hove and East Sussex). British Geological Survey Commissioned Report GR02/0294.

**Production of this map was commissioned and funded by the Office of the Deputy Prime Minister (Contract MP0677)**

**SAND & GRAVEL**

**Superficial deposits**

- Sub-alluvial: Inferred resources
- River Terrace deposits
- Storm beach deposits

**Bedrock deposits (sand)**

- Construction Sand
- Creaceous:  
Folkestone Formation

**CHALK**

- High purity chalk (93-98% CaCO<sub>3</sub>)
  - Low purity chalk (< 93% CaCO<sub>3</sub>)
- White Chalk Subgroup  
Grey Chalk Subgroup

**BRICK CLAY**

- Weald Clay Formation: Principal brick clay resource
  - Wadhurst Clay Formation
- Creaceous

**GYPSUM**

- Crop of gypsum-bearing host rock
- Jurassic:  
Purbeck Limestone Group

**MINERAL PLANNING PERMISSIONS (as at 31.10.01)**

Source: Mineral Planning Authorities

- Surface planning permission (valid and expired)
- Underground planning permission (valid and expired)

**MINERAL WORKINGS**

- Chailey Active site
- Balcombe Inactive (including those not started, worked-out and/or restored site)
- Active underground mine site
- Active wharf
- Undefined planning permission

- Mineral commodity**
- Sg Sand & gravel
  - Cs Construction sand
  - Ch Chalk
  - Cl Common clay and shale
  - Gyp Gypsum
  - Mg Marine sand & gravel (wharf)
  - Ss Silica sand
  - Sst Sandstone

**ENVIRONMENTAL DESIGNATIONS**

- National nature conservation designations (SSSIs and NNRs)
- International nature conservation designations (SACs, SPAs and Ramsar sites)
- Area of Outstanding Natural Beauty (AONB): Sussex Downs (part) and High Weald (part)
- Heritage Coast
- Scheduled Monument

**ADMINISTRATIVE AREAS**

- Mineral Planning Authority
- District

**SAND AND GRAVEL**

Sand and gravel are defined on the basis of particle size rather than composition. In current usage, the term 'gravel' is used for material that is coarser than 5 mm, with a maximum size of 40 mm, and the term 'sand' for the material that is finer, but coarser than 0.075 mm. Most sand and gravel is composed of particles that are rich in silica (quartz, quartzite and flint), but other rock types may occur locally.

The principal uses of sand are as fine aggregate in concrete, mortar and asphalt. The main use of gravel is as coarse aggregate in concrete. Substantial quantities of sand and gravel may also be used for construction fill. Production of land-won sand and gravel in East Sussex has declined substantially since 1990 and is now negligible. However, substantial quantities of marine-dredged sand and gravel are landed in the county, amounting to 0.8 million tonnes in 2000.

Sand and gravel resources occur in a variety of geological environments. In East Sussex, these resources fall into two categories:

- superficial or 'soft' deposits, subdivided into river terrace deposits, sub-alluvial deposits and storm beach deposits;
- bedrock, or 'solid' deposits represented by the Folkestone Formation.

Permitted reserves of workable sand and gravel are negligible.

**River sand and gravel (River Terrace deposits and sub-alluvial deposits)**

These deposits occur in both raised river terrace sequences and as flood plain terraces associated with, and underlying, present day alluvium and are well-developed along the valleys of the rivers Ouse and Cuckmere. The river terraces vary considerably in lithology, reflecting the nature of the parent 'solid' material. Generally, the river gravels consist of relatively poor quality terrigenous fine to medium gravels derived mostly from Wealden rocks, although the flint content progressively increases south of the Chalk escarpment. Most of these deposits are overlain by alluvium composed of clay and silt. Although these materials were worked in several locations in the past, there is currently no extraction of river sand and gravel in East Sussex.

**Storm beach gravel**

Storm beach gravel deposits occur in a number of locations along the coast of East Sussex. They consist primarily of flint gravels derived from the Chalk. The form of these deposits is dictated by the east-west longshore drift which prevails along this coast. They are generally made up of fine to coarse flint gravels and grade seawards into sands and laminated clay soils.

Since the construction of a marine wall at the early 1980s at Rye Harbour, production of storm beach gravel in East Sussex has declined substantially. Storm beach deposits are worked intermittently at Nook Beach near Rye. Further deposits in this area remain unworked. These are close to or within established nature conservation areas, extensive parts of which are designated as SSSIs, Special Protection Areas and candidate Special Areas of Conservation.

**Bedrock deposits (sand)**

In East Sussex, construction sand has been extracted on a small scale from the Folkestone Formation. These sands form a narrow and constrained east-west outcrop in the north-west of Lewes, close to the county boundary with West Sussex. They consist of medium- to coarse-grained sands and weakly cemented sandstone with variable particle size both vertically and laterally. Generally, the sands become finer towards the east and also tend to coarsen upwards. The formation is on average 20 m thick, although it becomes thinner to the east.

**GYPSUM**

Gypsum (CaSO<sub>4</sub>.2H<sub>2</sub>O) and anhydrite (CaSO<sub>4</sub>) are forms of calcium sulphate. They are worked from natural evaporite deposits, but may also be derived as by-products of certain industrial processes, notably flue gas desulphurisation (FGD). FGD gypsum is currently produced by the neutralisation of sulphur dioxide contained in flue gases at coal-fired power stations at six sites in Britain. The largest is the 4000 MW Drax power station in North Yorkshire and the other is the 2000 MW Easton-Say station in Nottinghamshire. The amount of natural gypsum extracted in Britain has declined in recent years due to the availability of substantial amounts of high quality synthetic gypsum obtained from these power stations.

Gypsum has many applications but is used principally in the production of plaster and plasterboard. A mixture of gypsum/anhydrite is also used as a retarder in cement manufacture.

In East Sussex, gypsum is found within a series of small 'lenses' of Jurassic-age rocks in the Roborough area. The gypsum occurs at the base of the Purbeck Limestone Group, directly above the Portland Sandstone. Until 1990, gypsum was worked underground at the mines at Moundfield and Brightling. Moundfield Mine has now closed and production is centred on the Brightling mine. This mine is the only operating deep mine in South-East England. Natural gypsum and anhydrite occur as beds or nodular masses up to a few metres thick. Gypsum is formed by the hydration of anhydrite or near surface, but passes into anhydrite generally at depths of more than 100 m.

Four consistent evaporite seams occur in the lower 15 m of the Purbeck Limestone Group, separated by mudstone beds. These seams are numbered 1 to 4 in descending order. Production at the Brightling Mine is from both the No. 3 and No. 4 seams, with the majority extracted from the latter. The seams are on average 4.5 m in thickness and are extracted using the room and pillar mining method.

Previously, run-of-mine material from the Brightling Mine was blended with FGD gypsum brought by rail from the Drax Power Station in Yorkshire for the production of plasterboard at the nearby Roborough Works. Recently, the Roborough Works switched to using solely FGD gypsum from Yorkshire and continental Europe for plasterboard manufacture. The sole use of the natural gypsum produced at Brightling Mine is as a retarder in Portland cement. The reject run-of-mine gypsum stone is crushed, screened and sold as material for farm tracks or building bases.

Gypsum resources extend beneath overlying Cretaceous cover. Thin boreholes have confirmed the presence of basal Purbeck evaporites at depth around the mines and elsewhere in the district. In general, at depths greater than 100 m below the surface, anhydrite rather than gypsum is present. Approximately 20 year proven reserves of gypsum have been reported in the Brightling/Moundfield area with the possibility of reserves from the Moundfield Mine being exploited from the Brightling Mine.

**BUILDING STONE**

Historically, East Sussex has produced and used a wide range of indigenous stones for building purposes. None of these sources are currently exploited for building stone in the county.

**Building Sandstone**


Harder sandstone beds in the Lower Cretaceous Hastings Group bordering Kent and the Ashdown and Turbidge Wells Sand (Ardingly Sandstone) formations located throughout East Sussex, were important sources of vernacular building material. Within the Ashdown Formation, the terms 'Cuckfield' and 'Tipton' stone were often applied to harder calcareous sandstone beds. The Lower Cretaceous Hylle Formation, which elsewhere includes the Kentish Ragstone, is poorly developed in East Sussex. At Eastbourne the green, glauconitic sandstones of the Upper Greensand Formation were quarried for local building stone.

**Building Limestone**

Although limestone is not currently quarried, limestones from the Upper Jurassic Purbeck Limestone Group were once worked and used locally for building purposes close to their outcrop. The fossiliferous limestone beds within the Lower Cretaceous Weald Clay Formation, known variously as small and large Paludina limestones or Beffordian, Pelwoth, Loughton and Sussex marbles, were once the basis of an important decorative/panelling stone industry. Locally, blocks of Upper Cretaceous Chalk are used in some buildings, but the unit was never extensively quarried for building purposes.

**Flint**

Flints, both beach cobbles and knapped varieties, from the Chalk have been extensively used locally for building purposes, particularly in the vicinity of the coast.

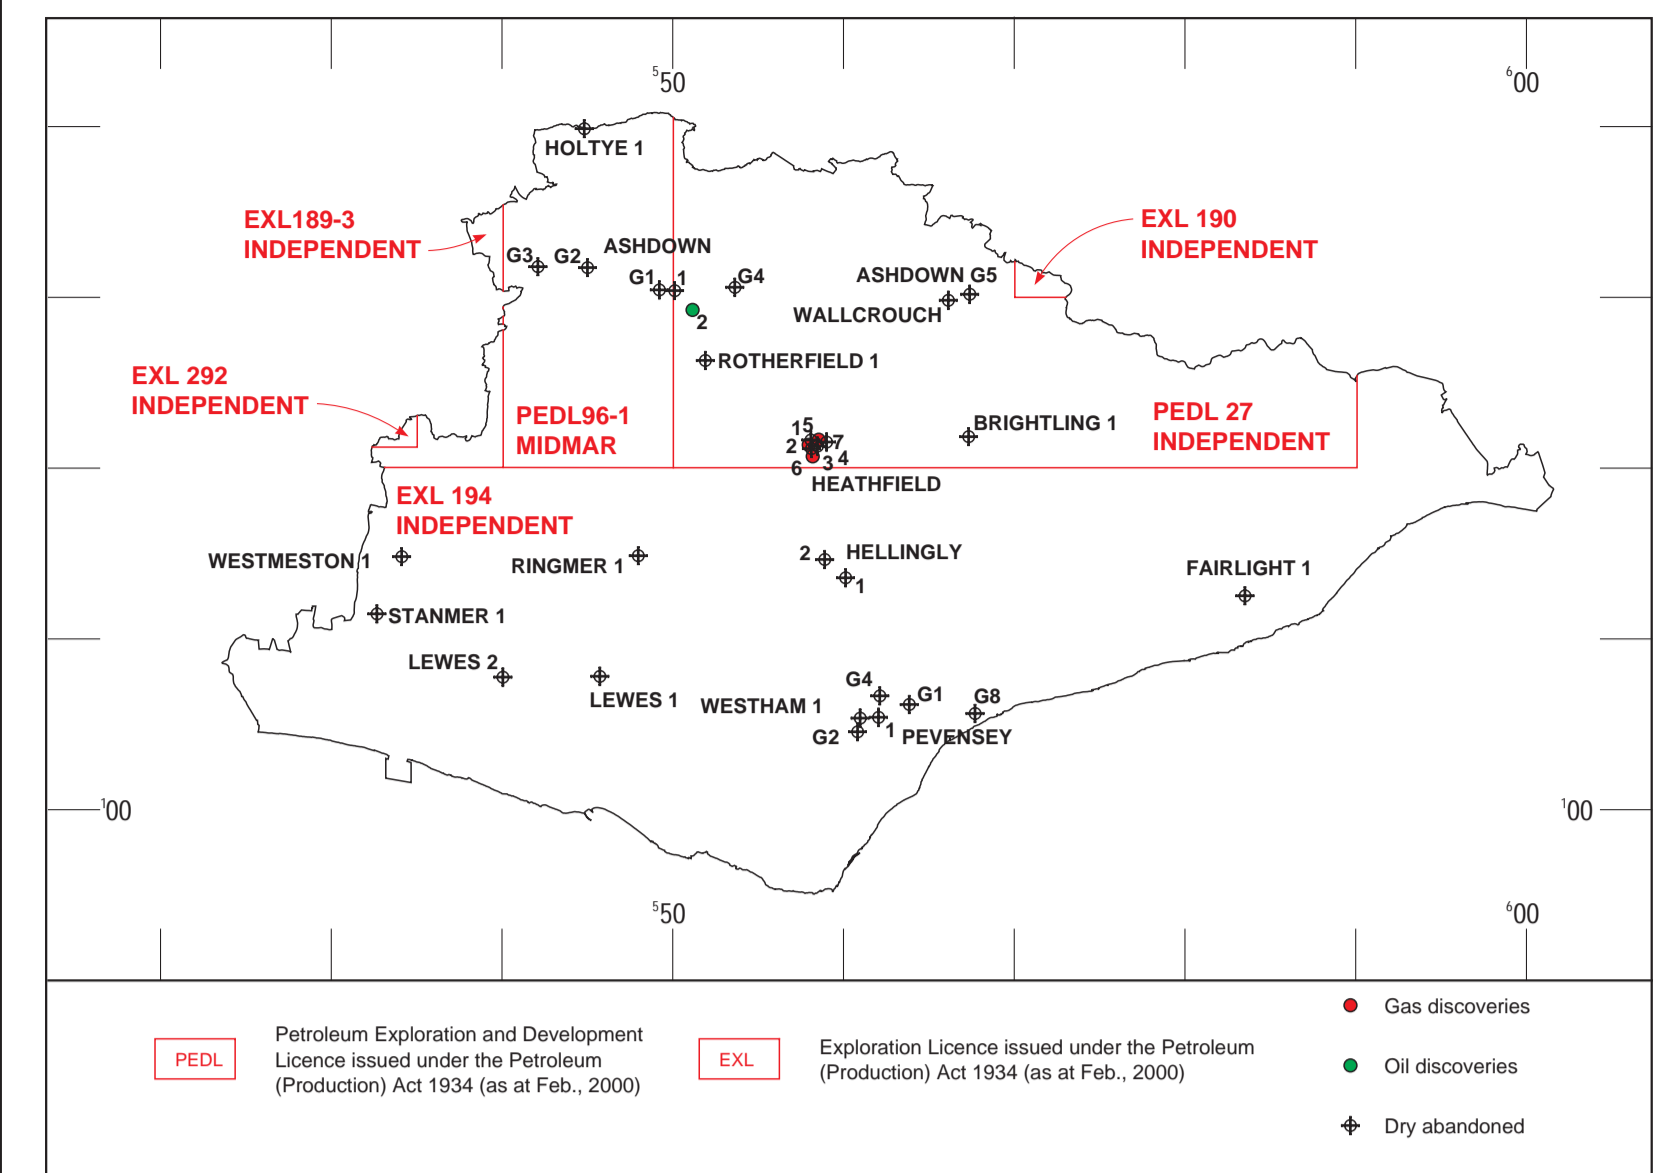

**HYDROCARBONS**

**Conventional Oil and Gas**

One of the first recorded hydrocarbon discoveries in England occurred in 1836 on the East Sussex/Kent border when gas was observed bubbling through water during the digging of a water well at Hawkhurst. In 1896, a well drilled close to the railway station at Heathfield encountered gas in large volumes. This was used to provide both the lighting at the station and to pump water for the locomotives. Total production to 1963 was estimated at 20 million cu. ft. Although interest in the Heathfield gas continued into the 1960s, costs were deemed too high to justify further development. However, the discoveries at Heathfield provided the impetus for subsequent hydrocarbon exploration in southern Britain.

Exploration wells and a network of seismic reflection surveys illustrate that the county has seen sporadic and sometimes intensive exploration for hydrocarbons. Despite minor surface seepages around the county, including important oil shows in the south near Pevensey (NGR SE37 1065) and at the Hons (NGR SE19 1065), exploration results have to date proved disappointing. Further discoveries to early 2002 have not been forthcoming, and while producing fields exist in West Sussex, there are no producing oil or gas fields in East Sussex.


Name of Borehole	Drilling Date	Type of Borehole	Type of show (oil or gas)	Current licence holder and operator	Total production (tonnes) in 2000
Netherfield	1875	Water	Gas	Open acreage	
Heathfield	1895	Water	Gas	PEDL 27 Independent	20
Ashdown	1955	Hydrocarbon exploration	Oil & minor gas	PEDL 6-1, Molmer	Production levels not developed

**Coal Mine Methane, Abandoned Mine Methane and Coalbed Methane (CBM) potential**

There is no potential for these forms of methane as coal-bearing strata are absent.

**Licensing**

The Department of Trade and Industry grants licences for exclusive rights to explore and exploit oil and gas reserves within Great Britain. The rights granted by landmark licences do not include any rights of access, and the licensees must also obtain any consent under current legislation, including planning permission.

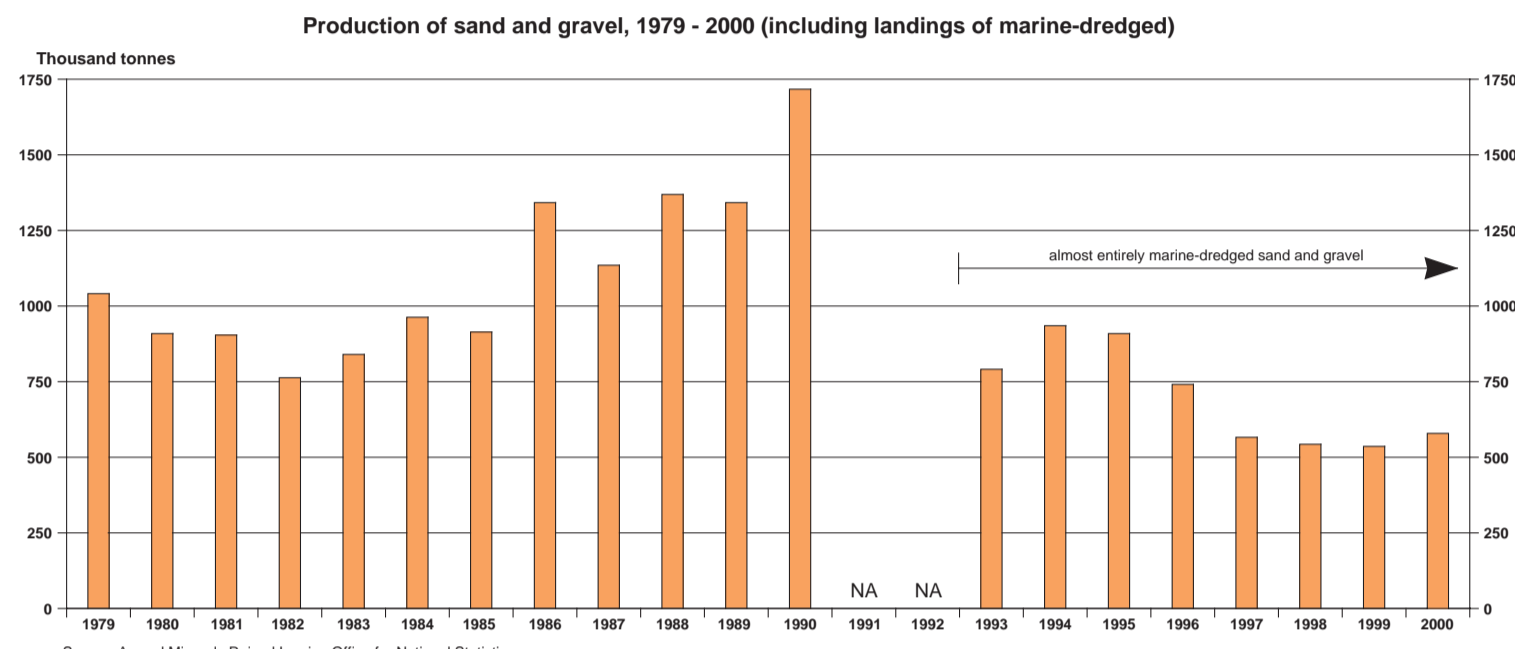

**CHALK**

Chalk is a relatively soft, fine-grained, white limestone, consisting mostly of the debris of planktonic algae. In East Sussex, it forms the prominent natural features of the South Downs. Almost the entire outcrop of the Chalk is within the Sussex Downs AONB and the area around Bearty Head and Cuckmere Haven is within the Sussex Heritage Coast. The Chalk is divided into the Grey and White Chalk Subgroups and is up to 450 m in thickness in this part of South-East England. The White Chalk Subgroup (formerly Middle and Upper Chalk) is the most extensive with the Grey Chalk Subgroup (formerly Lower Chalk) forming a thin band, on average 35-60 m in thickness, along the base of the north-facing scarp.

The Grey Chalk Subgroup is characterized by relatively high clay content, particularly towards the base, and is classified as low purity (<93% CaCO<sub>3</sub>). The overlying White Chalk Subgroup is of a higher purity (93-98% CaCO<sub>3</sub>). Flints are common in the White Chalk Subgroup, particularly towards the top.

Although long established, limited quarrying of chalk occurs in East Sussex. Historically, chalk extraction is limited to one site in the upper part of the White Chalk Subgroup near Newhaven. At this site, a high quality chalk is produced which is used in the production of specialist plasters.

The Chalk is a major aquifer and is the most important source of groundwater in the county.

**Aims and Limitations**

The purpose of the maps in this series is to show the broad distribution of those mineral resources which may be of current or potential economic interest and to relate these to selected nationally-recognized planning designations. The maps are intended to assist in the consideration and preparation of development plan policies in respect of mineral extraction and the protection of important mineral resources against sterilisation. They bring together a wide range of information, much of which is scattered and not always available in a convenient form.

The maps have been produced by collation and interpretation of mineral resource data principally held by the British Geological Survey. Information on the extent of mineral planning permissions has been obtained from the relevant Mineral Planning Authority (MPA). Some of these permissions may have lapsed or expired. The status of individual areas can be ascertained from the appropriate MPA. Location information on national planning designations has been obtained from the appropriate statutory body (Countryside Agency, English Nature and English Heritage). For further information the relevant body should be contacted.

The mineral resource data presented are based on the best available information, but are not comprehensive and their quality is variable. The inferred boundaries shown are, therefore, approximate. Mineral resources defined on the map delineate areas within which potentially workable minerals may occur. These areas are not of uniform potential and also take no account of planning constraints that may limit their working. The economic potential of specific sites can only be proved by a detailed evaluation programme. Such an investigation is an essential precursor to submitting a planning application for mineral working. Extensive areas are shown as having no mineral resource potential, but some isolated mineral workings may occur in these areas. The presence of these resources generally reflect very local or specific situations.

The maps are intended for general consideration of mineral issues and not as a source of identification on specific sites. The maps should only be used to determine individual planning applications or in taking other decisions on the acquisition of use of a particular piece of land, although they may give useful background information which aids a specific proposal within context.

**BRICK CLAY (including BRICKEARTH)**

The term 'brick clay' is used to describe clay used predominantly in the manufacture of bricks and, to a lesser extent, roof tiles and clay pipes. These clays may sometimes be used in cement manufacture, as a source of construction fill and for living and sealing landfill sites. The suitability of a clay for the manufacture of bricks depends principally on its behaviour during shaping, drying and firing. This will dictate the proportions of the fired brick such as strength and total resistance and, importantly, its architectural appearance.

There are several brick and tile manufacturing sites in East Sussex which use a variety of clay raw materials. The main brick clays in the county are the Cretaceous Weald and Wadhurst clay formations. The Weald Clay crops out in the south-west of the county and consists of a sequence of mudstones up to 450 m in thickness, with one or more interbedded thin beds of sandstone and limestone which brick makers tend to avoid. The mudstone consist predominantly of kaolinite and illite, a combination which is ideal for the manufacture of firing bricks. The Weald and Wadhurst clays are also important brick clay resources in the adjacent counties of West Sussex and Surrey where these clays form the basis for a number of large-scale brick making sites which are of regional importance. Weald Clay is extracted at Chailey near Lewes for the manufacture of firing bricks.

The Wadhurst Clay crops out extensively in the north east part of the county and is up to 70 m thick. It is worked for brick clay at two localities. At Aldershaw Farm in Battle, the Ashdown Formation is worked for the manufacture of roofing tiles. At Ashdown near Bevil, the Wadhurst Clay is used in conjunction with the Turbidge Wells Sand Formation for the manufacture of firing bricks.

Quaternary 'brickearth' is worked on a small scale in the Hastings area for the production of handmade bricks. 'Brickearths' are generally fin (less than 2 m), silty loams that are usually found in association with river gravels. They are of little value to the modern brickmaking industry and are not shown as a resource on this map.

**BGS maps covering East Sussex and Brighton & Hove**

