

GHGT-12

Looking for leakage or monitoring for public assurance?

Andrew J. Feitz^{a,b*}, Gregory Leamon^a, Charles Jenkins^{b,c}, David G. Jones^d, Andréa Moreira^e, Lia Bressan^f, Clarissa Melo^f, Laura M. Dobeck^g, Kevin Repasky^g, Lee H. Spangler^g

a Geoscience Australia, GPO Box 378, Canberra, ACT, 2601, Australia

b Cooperative Research Centre for Greenhouse Gas Technologies (CO2CRC), GPO Box 463, Canberra, ACT, 2601, Australia

c CSIRO Energy Transformed Flagship, GPO Box 3023, Canberra, ACT, 2601, Australia

d British Geological Survey, Environmental Science Centre, Keyworth, Nottingham, NG12 5GG, UK

e PETROBRAS – Petróleo Brasileiro S.A. Research Center – CENPES, Av. Horácio Macedo, 950, Rio de Janeiro – 21941-915, Brazil

f Pontifical Catholic University of Rio Grande do Sul - CEPAC, Av. Bento Gonçalves, 4592, Porto Alegre - 90619-900, Brazil

g Energy Research Institute, Montana State University, Bozeman, MT 59717, USA

Abstract

Monitoring is a regulatory requirement for all carbon dioxide capture and geological storage (CCS) projects to verify containment of injected carbon dioxide (CO₂) within a licensed geological storage complex. Carbon markets require CO₂ storage to be verified. The public wants assurances CCS projects will not cause any harm to themselves, the environment or other natural resources. In the unlikely event that CO₂ leaks from a storage complex, and into groundwater, to the surface, atmosphere or ocean, then monitoring methods will be required to locate, assess and quantify the leak, and to inform the community about the risks and impacts on health, safety and the environment. This paper considers strategies to improve the efficiency of monitoring the large surface area overlying onshore storage complexes. We provide a synthesis of findings from monitoring for CO₂ leakage at geological storage sites both natural and engineered, and from monitoring controlled releases of CO₂ at four shallow release facilities – ZERT (USA), Ginninderra (Australia), Ressacada (Brazil) and CO₂ field lab (Norway).

© 2014 The Authors. Published by Elsevier Ltd. This is an open access article under the CC BY-NC-ND license (<http://creativecommons.org/licenses/by-nc-nd/3.0/>).

Peer-review under responsibility of the Organizing Committee of GHGT-12

Keywords: Monitoring; CCS; carbon dioxide; CO₂; geological storage; geosequestration; leakage; ZERT; Ginninderra; Ressacada; CO₂ field lab

* Corresponding author. Tel.: +61-2-6249-9781; fax: +61-2-6249-9920.

E-mail address: andrew.feitz@ga.gov.au

1. Introduction

Monitoring is a basic regulatory requirement for all carbon capture and storage (CCS) projects; to verify that injected carbon dioxide (CO₂) remains in its storage complex, and that there will be no threat to human health, or adverse environmental impacts. Carbon markets require storage to be verified, and the public wants assurances that they won't be impacted.

Regulators place a high priority on monitoring the storage complex in order to track the location and movement of injected CO₂ [1-4]. Similarly, stakeholders would like to know if CO₂ is escaping from the storage complex into the overburden, potentially contaminating overlying resources such as groundwater, oil and gas pools, or coal seams. In the unlikely event that the storage complex fails, and CO₂ leaks from the storage complex, through the overburden, and into the atmosphere or ocean, then monitoring methods will be expected to locate and monitor the leak, to quantify the leak, and to inform the community about the risks to health, safety and the environment. A CO₂ storage site includes a range of anthropogenic, geological and biological features which need to be monitored: from precisely positioned injection wells through complex geological systems, to the potentially large surface areas overlying a storage complex. This paper considers strategies to improve the efficiency of monitoring the large interface between the ground and atmosphere overlying the storage complex.

Surface monitoring methods, such as shallow groundwater monitoring, surface water monitoring, soil gas sampling, soil flux, and eddy covariance atmospheric monitoring, typically provide poor spatial resolution, are labour intensive, and often involving significant and complex data processing. Further, these activities may be required throughout the life of injection operations and many years after. These techniques have been routinely deployed at demonstration storage sites [5-6] for assurance monitoring, but their deployment is not necessarily commensurate with the risk of leakage at these sites.

Assurance surface monitoring contributes towards the social licence to operate a storage site, and is critical for addressing public concern around areas, or sites, with high social, economic or environment value, e.g. monitoring a particular stream, endangered plant community, basement in a house, or private groundwater well [7]. In this respect, assurance monitoring is quite specific, and by its nature, highly localized, as it seeks to demonstrate that there is no significant impact from a CO₂ storage project on features of interest, over many years. It appears likely that for larger projects, the scale of assurance surface monitoring undertaken at many pilot and demonstration sites today may not be viable on proportionally larger scales, over longer time frames.

Storage sites are selected on the basis that they are not likely to leak. It is therefore unlikely that resampling the same point location year on year, or the siting of continuous monitoring stations using soil flux, soil gas, eddy covariance or similar techniques around a geological storage site, will coincide with an actual leak [7]. Monitoring programs for future projects will need to be risk-based, and fit-for-purpose, based on consideration of the physical characteristics of the storage site, the risk profile of the storage site, the scale of the injection operations, the project uncertainties, and the potential for significant impacts. A risk-based program may be limited in scope to the higher risk features of a storage complex, and the conclusion that there is no environmental impact would be drawn if these impacts are ruled out at some agreed threshold or level of impact. This means that surface monitoring programs will require a component of continuous baseline and assurance monitoring, but will also require a contingency response program which has flexibility to respond to unforeseen changes in the risk profile of the storage site and surrounding region: to "scale-up" when a leak is detected, or suspected from subsurface monitoring. Current approaches to monitoring may not provide very specific spatial information about where monitoring should be conducted to find surface expressions of leaks. In this paper we seek to clarify how surface monitoring could proceed and what the limitations might be.

Nomenclature

Assurance monitoring refers to near surface monitoring performed to reassure stakeholders that assets such as groundwater wells are unaffected by storage operations and there is no threat to health and safety.

Leakage refers to unintended movement of CO₂ out of pre-defined containment.

Monitoring refers to measurement and surveillance activities necessary to provide an assurance of the integrity of CO₂ storage [4].

Storage complex refers to a subsurface geological system comprising a storage unit and primary and possibly secondary seals, extending laterally to the defined limits of the CO₂ storage operation or operations. Limits can be defined by natural geologic boundaries, regulation, or legal rights [4].

Storage site refers to a defined volume within a geological formation used for the geological storage of CO₂ and associated surface and injection facilities [8].


2. Leakage surface expression

Field experiments at CO₂ controlled release facilities, in different parts of the world, show that established near surface environmental monitoring techniques are effective for characterising “known leaks”; providing insights into near surface plume migration, impact on groundwater chemistry, mapping the lateral extent of a leak, and demonstrating CO₂ leakage quantification techniques [9-14]. Table 1 compares four controlled release sites where shallow CO₂ release experiments have been conducted through an undisturbed overburden, and where leakage has been detected at the surface. The four sites compared are Ginninderra (Canberra, Australia), ZERT (Bozeman, Montana, USA), RESSACADA (Florianopolis, Brazil), and the CO₂ Field Lab (Svelvik, Norway). The depths of injection vary between 1.2 to 20 m.

Table 1. Comparison of controlled release facility properties

Site	Ginninderra	ZERT	RESSACADA	CO ₂ Field Lab
Location	Australia	US	Brazil	Norway
Depth of release (m)	2.0	1.2 – 2.5	8.0	20
Well orientation	horizontal	horizontal	vertical	45° inclined
Length of CO ₂ release zone (m)	82	70	0.3	<1
CO ₂ injection rate (kg/d)	144 - 288	100 - 300	2.2	120 - 420
Soil type	Buried fluvial	Alluvial deposits	Sand with some clay lenses	Sand
Vegetation cover	Canola, barley, wheat, field peas	Alfalfa, clover, dandelion, grasses	Grasses	Almost none
Typical groundwater level during release (m below ground)	0.85 – 2.3	1.5	1.5 – 2.0	0.8 – 1.2
CO ₂ surface breakthrough (days)	<1	<1	~3	~1

All experiments show a similar type of leakage behaviour: that the surface expression of CO₂ leakage, even under highly controlled conditions, is restricted to localised hot spots. Leakage at these sites is not homogenous and evenly distributed over a wide area, but is characterised by small zones (1 – 10s of metres in diameter) of high CO₂ intensity that rapidly falls to background conditions away from the leakage zone (Fig. 1). The release experiments demonstrate that CO₂ will not necessarily express at the surface above the leakage point and there can be substantial lateral migration in the near subsurface (Fig. 1c and Fig. 1d). In the RESSACADA experiment, elevated surface CO₂ flux was observed some 30 m from the vertical release point at a surface depression next to a road. This corresponded with electrical resistivity measurements conducted at the site that tracked the migration and direction of the subsurface plume.

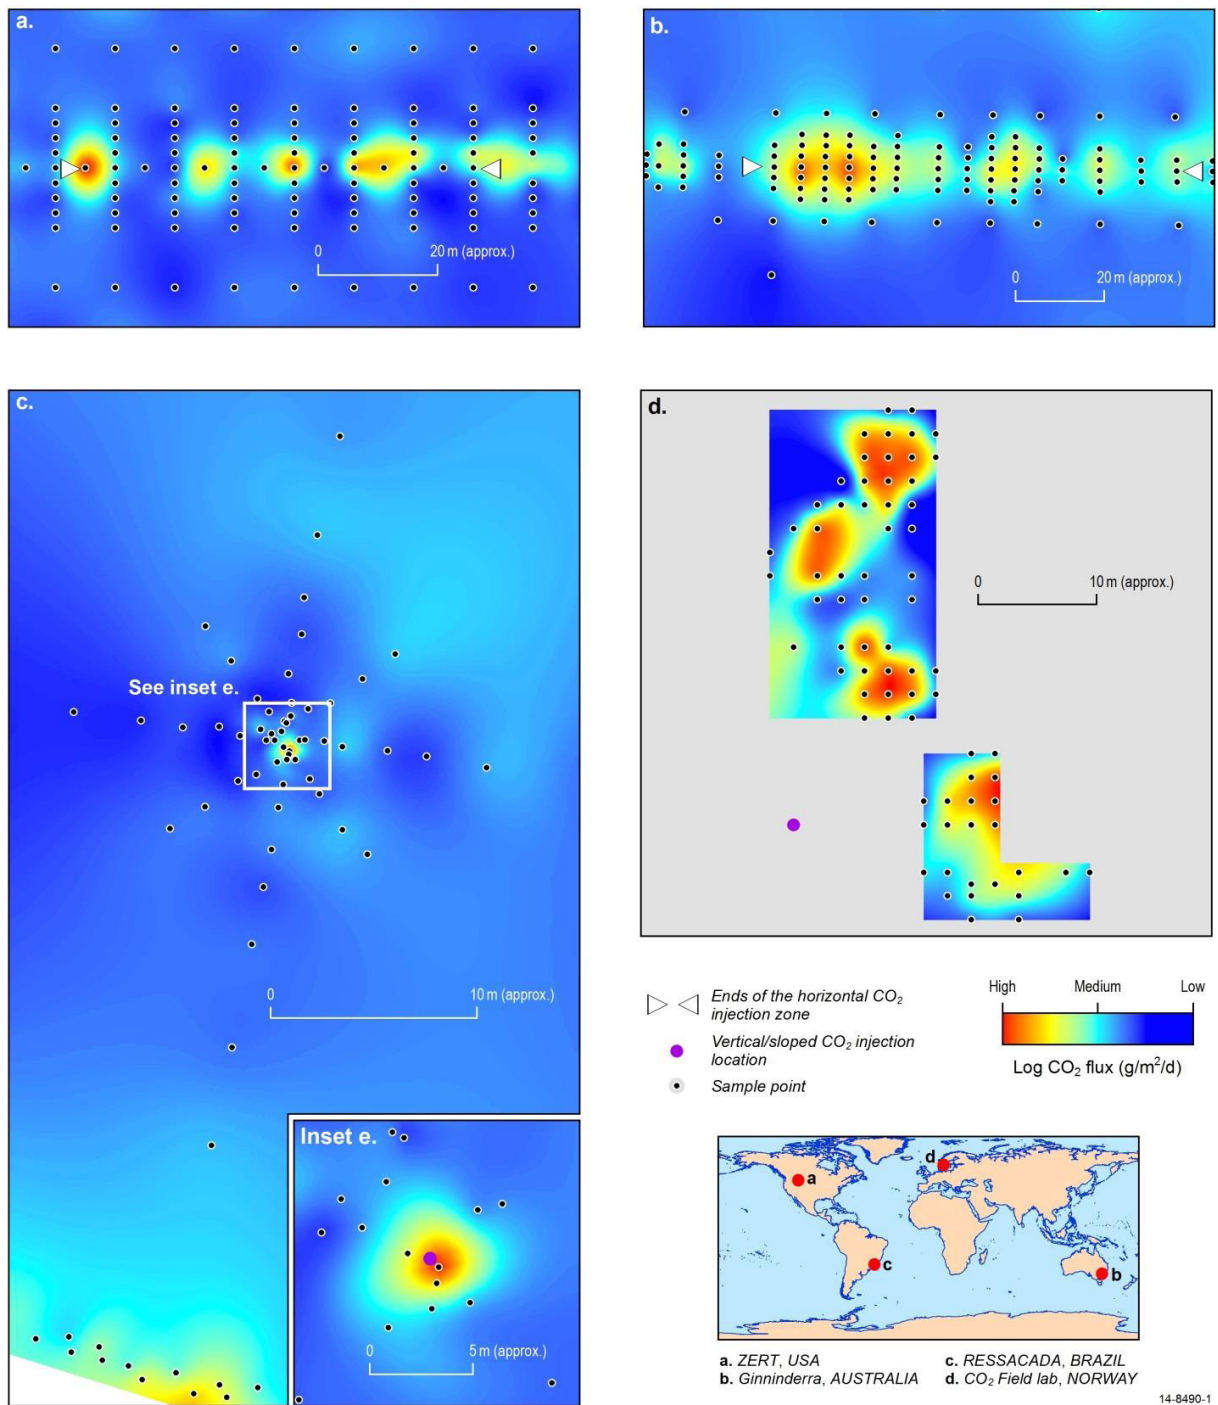

14-8490-1

Fig. 1. Examples of soil CO₂ flux maps observed at controlled release sites and the location of the CO₂ release zones. Note that (a), (b) and (c) have been zoomed in from their original survey extent for clarity. The two white triangles in (a) and (b) indicate the extent of the horizontal well CO₂ release zone, which is continuous between these two points. Each site has different baseline and maximum flux values: log CO₂ flux for (a) ZERT (Bozeman, Montana, USA; high = 3.67; low = 1.22); (b) Ginninderra (Canberra, Australia; high = 2.94; low = 0.22); (c and e) RESSACADA (Florianopolis, Brazil; high = 2.66; low = 0.57); (d) CO₂ Field Lab (Svelvik, Norway; high = 2.11; low = -1.15).

One possibility for the observed CO₂ hot spots at the surface could be higher permeability streaks and relative weaknesses in the soil profile. Small variations in the soil properties could lead to preferential pathways. The opportunity to compare the behaviour at these small scale release experiments with larger leakages in the near surface from deep geological storage has not arisen, but results from natural leaks display similar “patchy” surface expression [16-24]. Since results from controlled releases and natural releases to date suggest that CO₂ leaks do take preferential pathways, it is important to examine the implications if a similar type of behaviour occurred during an actual leak from deep engineered storage.

3. High risk zones and broad-scale detection at the surface

Near surface monitoring programs should be informed using a risk-based approach, first surveying areas of higher risk such as operational and abandoned wells [25]. Human observation (e.g. bubbling through pooled water, audible hissing, vegetation die-off, salt scars) at wells and other infrastructure is important for the detection of small leaks and should be formally integrated into a regular maintenance program.

Although monitoring should be risk-based, prior information on the location of potential leaks is imprecise in the present state of knowledge. Broad-scale detection technologies such as airborne hyperspectral or mobile CO₂ sniffer type monitoring (ground-based or airborne) will be required to find small-scale seepage features, but this technology is the least well developed. Airborne methods offer two contrasting possibilities for surveying large areas cheaply. Sniffer drones, flying at altitudes of a few metres, may be able to get close enough to leaks for their CO₂ signal to stand out above background levels. Conventional aerial imagery can cover wide areas at reasonable cost but detection can be ambiguous at present.

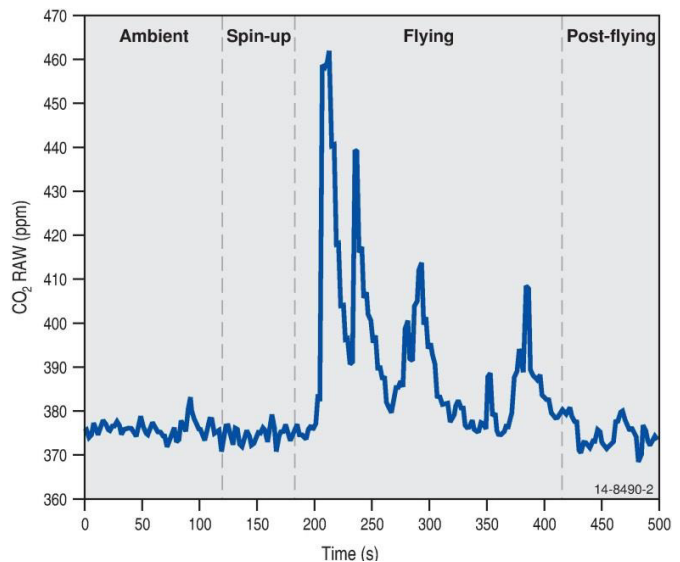
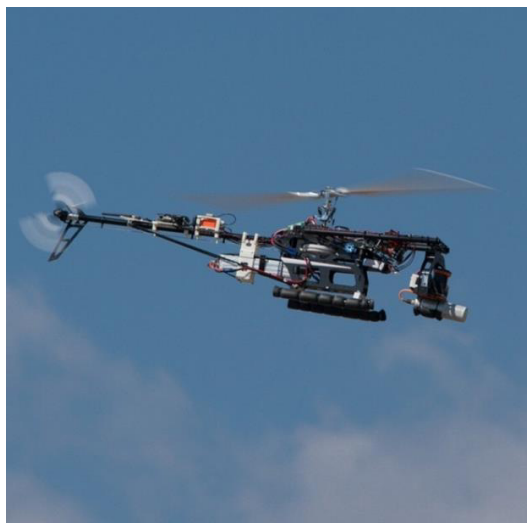


Fig. 2. Preliminary results of CO₂ detection using an unmanned aerial vehicle (UAV) for surface leak detection from Popp et al [28]. The photo of the left shows the UAV equipped with a Vaisala GMP 343 CO₂ sensor (sampling rate 0.5 Hz), which is located at the front of the battery powered vehicle. The figure on the right illustrates the CO₂ response of the sensor as the UAV criss-crosses at ~2 m height over a 100 kg/d surface release under continuous flight conditions. Photo by Uwe Zimmer (ANU).

If we consider firstly the detection of anomalous CO₂, promising results have been achieved using ground-based mobile detection systems at controlled release sites [26] and natural seepage sites [18]. Detection of small-scale CO₂ leaks using airborne systems is at an early stage of development but also shows promise [27,28]. An example is given in Figure 2 from Poppa et al [28]. CO₂ was released from a chamber on the ground at 100 kg/d and an UAV

equipped with a Vaisala GMP 343 CO₂ sensor flew transects at 2 m height over the release point. The sampling was 0.5 Hz, which meant that the UAV had to fly relatively slowly, but it was possible to detect the small CO₂ leak under continuous flight conditions (Fig. 2). The perturbations from the release detected by the sensor were consistent with modeling of the leakage plume [29].

Progress on airborne sniffer technology appears to be limited by existing sensor technology and the absence of suitable small, precise, high frequency CO₂ sensors. Measurements must also be taken close to the ground surface in order to detect the signal [29]. A static network of atmospheric sensors has been demonstrated to detect leaks over a relatively large spatial area [30] but sensor performance and cost presently limits wider deployment. Scanning differential absorption lidar (DIAL) has also been investigated for CO₂ leak detection over 1 – 2.5 km scales [31].

Biological monitoring relies on detecting a vegetation stress response as plants are affected by increased CO₂ levels in their root zone. It is in its infancy in terms of its development, uptake and application to CO₂ storage projects [32], but has the potential to survey large areas at relatively low cost. One approach is to use airborne hyperspectral or multispectral imaging. This has been deployed at controlled release sites [33,34] and has been used with some success at natural CO₂ seeps [35-38]. Example hyperspectral images for ZERT and Ginninderra are provided in Figure 3. For the ZERT data (Fig. 3a), an unsupervised classification approach shows a high degree of spatial correlation between the hot spot locations identified using hyperspectral data in 2009 with hot spots previously identified using soil flux techniques in 2008 [38]. In the case of the Ginninderra data, conventional spectral indices have been found to delineate the damage to vegetation caused by CO₂ [14]. Figure 3c is an image obtained by forming a ratio of the reflectance at a wavelength of 1500 nm to that at 500 nm, and by comparison with Figure 3d, it can be seen that the region of leakage is detected. This index produces fewer false alarms than other choices but the region of leakage is clearly not uniquely identified.

Interpretation of the measurements is complicated by the changes in soil surface not due to CO₂ impacts such as cropping, ploughing, animal disturbances, drought, pests, or absence of vegetation, which create false positives. Application is also limited by winter snow cover. Nevertheless, when used in conjunction with aerial photography and with knowledge about the size and shape of an expected leak (i.e. 1-10 metre circle), this technique may be able to narrow the area for ground-based investigations using techniques such as soil gas, soil flux or near surface mobile atmospheric measurements. Evidently, site operators would want the false positive rate to be low as otherwise the technique could lead to numerous unnecessary investigations.

While searching for surface expressions of leakage may be difficult, there is likely to be relevant prior information e.g. indications of migration from deeper subsurface monitoring. This can be assimilated into a methodical and rational search strategy by the methods of Bayesian search theory [39]. This technique is used routinely by the US Coastguard, for instance, and yields a search that can be updated in real time on the basis of null results, and also optimised for finite amounts of time or other resources. Once a CO₂ leak is detected, conventional monitoring techniques such as soil gas, soil flux surveys and atmospheric techniques can be deployed to monitor leakage, characterise the extent of leakage, understand plume behaviour, and quantify the leak magnitude.

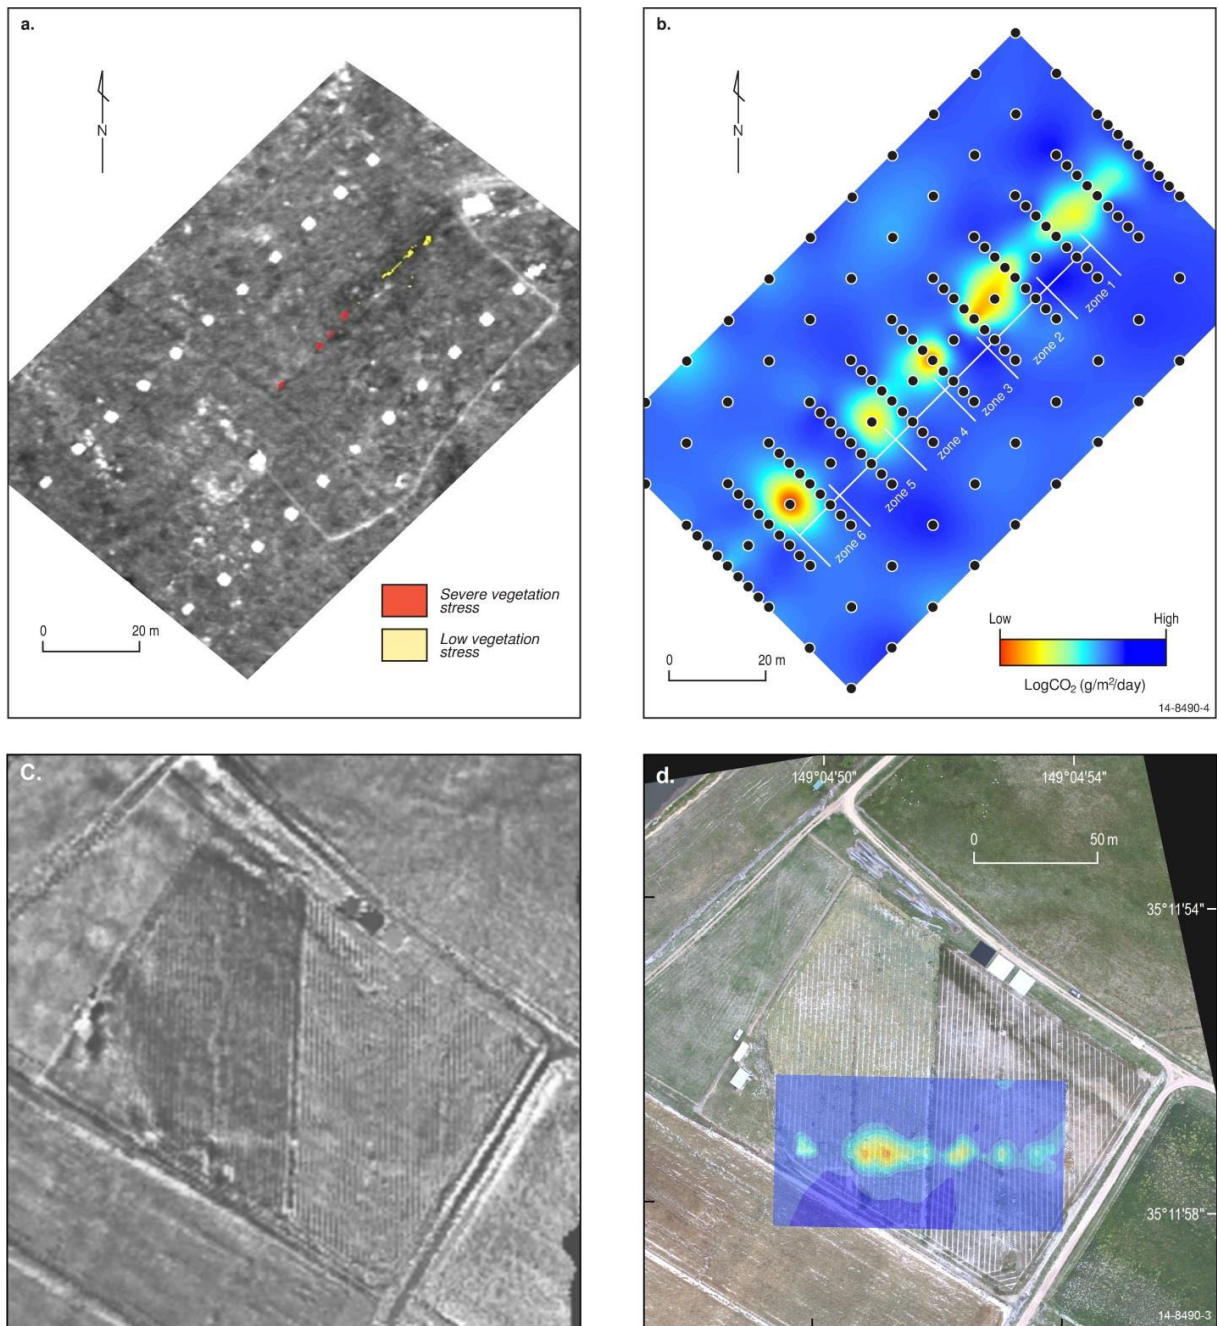


Fig. 3. Comparison of airborne hyperspectral measurements at (a) ZERT and (c) Ginninderra and comparison to soil flux maps for (b) ZERT and (d) Ginninderra. The ZERT hyperspectral image uses an unsupervised classification whereas measurements at the Ginninderra site are display using a ratio of the reflectance at 1500 nm to that at 500 nm. The ZERT illustration shows a high degree of spatial correlation of the hot spot locations between the June 25 unsupervised classification result (a) and a CO_2 flux map derived from accumulation chamber ground measurements made on July 30, 2008 at the black dots (b). Note that the unsupervised classification only included analysis of zones 1-3, whereas the flux map was derived during an injection into zones 1-6. For soil CO_2 flux scales, refer to Fig. 1.

4. Summary and recommendations

- Experiments from control release experiments show that surface leakage is not uniformly distributed, even under highly controlled conditions, but is localised and patchy, expressing as small (1-10s of metres in diameter) high intensity flux “hot spots”. This phenomenon is consistently observed at natural CO₂ seepage sites and controlled release studies. Moreover, the location of the surface expression can move depending on climatic conditions, most likely due to the influence of groundwater levels and the extent of the vadose zone.
- Biological surveys show promise as a low cost and effective method for detecting and locating leaks on a regional scale, but typically suffer from a high false positive rate. Surveys at control release sites have found that CO₂ impacts on plants can be clearly observed at ground level suggesting there is potential to improve airborne techniques.
- Airborne and ground-based mobile detection systems show promise as cost effective technologies for leakage detection over wider areas or even regional scales.
- Monitoring programs are likely to encompass multiple technologies with multiple purposes, objectives, regulatory requirements and technical designs. Monitoring programs should be customised for the characteristics, features, risk profile, uncertainties and regulatory requirements of specific storage sites and surrounding regions. This will require integrated monitoring programs that address potential impacts on all aspects of the environment within which the CCS project operates. The design of the monitoring program should be re-evaluated whenever the risk profile changes.
- There will always be financial pressures to achieve monitoring objectives at lowest cost. Open ended cost models increase uncertainty about project economics. For marginal projects like CO₂ storage, high levels of uncertainty will have a negative impact on project viability.
- Combinations of technologies that compliment, and verify the findings of the other, should be encouraged, rather than relying on single technologies, particularly in the early stages of a project when uncertainties around risk are highest.
- Models of the physical, chemical and biological processes at the storage site will need to be developed to aid in the interpretation and understanding of the monitoring results. For each monitoring program, the thresholds that indicate a potential leak will need to be determined, for each type of instrument deployed, and for each parameter measured, at each site [32].

5. Conclusion

To answer the question posed by the title: what is the purpose of near surface monitoring? Is it looking for leakage or monitoring for public assurance? Geological storage projects will need a social licence to operate. Public concerns about leakage therefore need to be addressed, regardless of whether or not geological risk assessments conclude that the likelihood of leakage is insignificant. Therefore, a basic level of surface monitoring will always be required for assurance purposes. A practical near-surface monitoring approach will initially focus on potential leakage pathways with some elevated probability of occurrence (e.g. wells), or receptors that have higher consequence (e.g., basements of occupied buildings). This provides assurance to individuals, the public, regulators, carbon markets and other stakeholders, that the storage site is performing as originally intended. However, this needs to be complemented with cost-effective techniques that can monitor for small-scale leak features over wide areas. In the unlikely event that monitoring indicates that CO₂ is escaping from a storage site into the atmosphere, surface monitoring will be fundamental in locating, assessing, and quantifying the leak. Research continues, through a world-wide network of control release facilities, to find the most cost effective approaches for assurance monitoring and for leakage detection and assessment.

Acknowledgements

AJ and GL acknowledge funding provided by the Australian Government through the Carbon Capture and Storage – Implementation budget measure to support this research. AJ and CJ also acknowledge funding for the research provided by the Australian Government through the CRC program. Jennifer Lewicki is kindly thanked for providing soil flux data for the ZERT site. DJ acknowledges the work of many colleagues involved in the CO₂ Field Lab project, which was funded by the CLIMIT research programme (Project No. 201608) (through Gassnova) and the French Direction Générale de la Compétitivité, de l'Industrie et des Services (DGCIS, France) and through contributions from the project partners.

References

- [1] Australian Parliament. Offshore Petroleum and Greenhouse Gas Storage Act 2006. Act No. 14 of 2006 as amended. Office of Legislative Drafting and Publishing. Attorney-General's Department, Canberra (2008) <http://www.comlaw.gov.au/Series/C2006A00014>
- [2] European Parliament. Directive 2009/31/EC of the European Parliament and of the Council of 23 April 2009 on the geological storage of carbon dioxide and amending Council Directive 85/337/EEC, European Parliament and Council Directives 2000/60/EC, 2001/80/EC, 2004/35/EC, 2006/12/EC, 2008/1/EC and Regulations (EC) No 1013/2006. Official Journal of the European Union (5.6.2009) L 140/114-135.
- [3] UNFCCC. Decision 10/CMP.7, Modalities and procedures for carbon dioxide capture and storage in geological formations as clean development mechanism project activities. Report of the Conference of the Parties serving as the meeting of the Parties to the Kyoto Protocol on its seventh session, held in Durban from 28 November to 11 December 2011, Addendum, Part Two: Action taken by the Conference of the Parties serving as the meeting of the Parties to the Kyoto Protocol at its seventh session. FCCC/KP/CMP/2011/10/Add.2; 15 March 2012, p.13-30.
- [4] CSA. Z741-12 Geological storage of carbon dioxide. CSA Group (2012) 80 pages. <http://shop.csa.ca/en/canada/design-for-the-environment/z741-12/invt/27034612012/>
- [5] Jenkins C, Cook PJ, Ennis-King J, Underschlutz J, Boreham C, Dance T, de Catriat P, Etheridge D, Freifeld B, Hortle A, Kirste D, Paterson L, Pevzner R, Schacht U, Sharma S, Stalker L, Urosevic M. Safe storage and effective monitoring of CO₂ in depleted gas fields. Proceedings of the National Academy of Science 2012: 109; 35-41.
- [6] Taquet N, Pironon J, De Donato P, Lucas H, Barres O. Efficiency of combined FTIR and Raman spectrometry for online quantification of soil gases: Application to the monitoring of carbon dioxide storage sites. International Journal of Greenhouse Gas Control 2013: 12; 359-371.
- [7] Zhang Y, Oldenburg CM, Benson SM. Vadose zone remediation of carbon dioxide leakage from geologic carbon dioxide sequestration sites. Vadose Zone Journal 2004: 3; 858-66
- [8] EU European Communities (Geological Storage of Carbon Dioxide) (Amended) Regulations 2014. Statutory Instruments S.I. No. 279 of 2014. Published in "Iris Oifigiúil" 20th June, 2014.
- [9] Smith KL, Steven MD, Jones DG, West JM, Coombs P, Green KA, Barlow TS, Breward N, Gwosdz S, Kruger M, Beaubien SE, Annunziatellis A, Graziana S, Lombardi S. Environmental impacts of CO₂ leakage: recent results from the ASGAR facility, UK. Energy Procedia 2013: 37; 791-799.
- [10] West JM, Pearce JM, Coombs P, Ford JR, Schieb C, Colls JJ, Smith KL, Steven MD. The impact of controlled injection of CO₂ on the soil ecosystem and chemistry of an English lowland pasture. Energy Procedia 2009: 1; 1863-1870.
- [11] Trautz RC, Pugh JD, Varadharajan C, Zheng L, Bianchi M, Nico PS, Spycher NF, Newell DL, Esposito RA, Wu Y, Dafflon B, Hubbard SS, Birkholzer JT. Effect of Dissolved CO₂ on a Shallow Groundwater System: A Controlled Release Field Experiment. Environmental Science and Technology 2012;47; 298-305.
- [12] Cahill AG, Jakobsen R. Hydro-geochemical impact of CO₂ leakage from geological storage on shallow potable aquifers: A field scale pilot experiment. International Journal of Greenhouse Gas Control 2013: 19; 678-688.
- [13] Spangler LH, Dobeck LM, Repasky K, Nehrir AR et al. A shallow controlled release facility in Bozeman, Montana, USA, for testing near surface CO₂ detection techniques and transport models. Environmental Earth Sciences 2010: 60; 227-239.
- [14] Feitz A, Jenkins C, Schacht U, McGrath A, Berko H, Schroder I, Noble R, Kuske T, George S, Heath C, Zegelin S, Curnow S, Zhang H, Sirault X, Jimenez-Berni J, Hortle, A. An assessment of near surface CO₂ leakage detection techniques under Australian conditions. Energy Procedia 2014 (in press).
- [15] Jones, DG., Barkwith, AKAP., Hannisa, S., Listera, TR, Galb, F, Grazianic, S., Beaubien, SE and Widory, D. Monitoring of near surface gas seepage from a shallow injection experiment 1 at the CO₂ Field Lab, Norway. International Journal of Greenhouse Gas Control 2014: 28; 300-317.
- [16] Annunziatellis A, Beaubien SE, Bigi S, Ciotoli G, Coltella M, Lombardi S. Gas migration along fault systems and through the vadose zone in the Latera caldera (central Italy): Implications for CO₂ geological storage. International Journal of Greenhouse Gas Control 2008: 2; 353-372.
- [17] Beaubien SE, Ciotoli G, Coombs P, Dictor MC, Krüger M, Lombardi S, Pearce JM, West JM. The impact of a naturally occurring CO₂ gas vent on the shallow ecosystem and soil chemistry of a Mediterranean pasture (Latera, Italy). International Journal of Greenhouse Gas Control 2008: 2; 373 – 387.
- [18] Jones DG, Barlow T, Beaubien SE, Ciotoli G, Lister TR, Lombardi S, May F, Möller I, Pearce JM, Shaw RA. New and established techniques for surface gas monitoring at onshore CO₂ storage sites. Energy Procedia 2009: 1; 2127-2134.

- [19] Krüger M, Jones D, Frerichs J, Oppermann BI, West J, Coombs P, Green K, Barlow T, Lister R, Shaw R, Strutt M, Möller I. Effects of elevated CO₂ concentrations on the vegetation and microbial populations at a terrestrial CO₂ vent at Laacher See, Germany. *International Journal of Greenhouse Gas Control* 2011; 5: 1093-1098.
- [20] Lewicki J, Birkholzer J, Tsang CF. Natural and industrial analogues for leakage of CO₂ from storage reservoirs: identification of features, events, and processes and lessons learned. *Environmental Geology* 2007; 52: 457-467.
- [21] Pettinelli E, Beaubien SE, Zaja A, Menghini A, Praticelli N., Mattei E., Di Matteo A, Annunziatellis A, Ciotoli G, Lombardi S. Characterization of a gas vent using various geophysical and geochemical methods. *Geophysics* 2010; 75: B137 – B146.
- [22] Rogien JD, Kerrick DM, Chiodini G, Frondini F. Flux measurements of nonvolcanic CO₂ emission from some vents in Central Italy. *Journal Geophysical Research-Solid Earth* 2000; 105: 8435-8445.
- [23] Vodnik D, Kastelec D, Pfanz H, Macek I, Turk B. Small-scale spatial variation in soil CO₂ concentration in a natural carbon dioxide spring and some related plant responses. *Geoderma* 2006; 133: 309-319.
- [24] Ziogou F, Gemeni V, Koukoulas N, de Angelis D, Libertini S, Beaubien SE, Lombardi S, West JM, Jones DG, Coombs P, Barlow TS, Gwosdz S, Krüger M. Potential environmental impacts of CO₂ leakage from the study of natural analogue sites in Europe. *Energy Procedia* 2013; 37: 3521-3528.
- [25] Mathieson A, Miedgley J, Dodds K, Wright I, Ringrose P, Saoul N. CO₂ sequestration monitoring and verification technologies applied at Krechba, Algeria. *The Leading Edge* 2010; 29: 216-222.
- [26] Krevor S, Perrin JC, Esposito A, Rella C, Benson S. Rapid detection and characterization of surface CO₂ leakage through the real-time measurement of $\delta^{13}\text{C}$ signatures in CO₂ flux from the ground. *International Journal of Greenhouse Gas Control* 2010; 4: 811-815.
- [27] Neumann PP, Asadi S, Bennetts VH, Lilienthal AJ, Bartholmai M. Monitoring of CCS Areas using Micro Unmanned Aerial Vehicles (MUAUVs). *Energy Procedia* 2013; 37: 4182-4190.
- [28] Poppa F, Zimmer U, Feitz A, Berko H. Development of a carbon dioxide monitoring rotorcraft unmanned aerial vehicle. *Robotics: Science and Systems (RSS) Workshop on Robotics for Environmental Monitoring (WREM)*, 24-28 June 2013, Berlin, Germany.
- [29] Berko H, Poppa F, Zimmer U and Feitz A. Testing the application of an unmanned aerial vehicle for CO₂ leak detection at the Ginninderra controlled release facility. *CO2CRC Research Symposium* 2013, 19-20 November 2013, Hobart, Australia.
- [30] Kuske T, Jenkins C, Zegelin S, Mollah M, Feitz A. 2012. Atmospheric tomography as a tool for quantification of CO₂ emissions from potential surface leaks: Signal processing workflow for a low accuracy sensor array. *Energy Procedia* 2013; 37: 4065-4076.
- [31] Johnson W, Repasky K, Carlsen JL. Micropulse differential absorption lidar for identification of carbon sequestration site leakage. *Applied Optics* 2013; 52: 2994-3003.
- [32] Stalker L, Noble R, Pejic B, Leybourne M, Hortle A, Michael K, Dixon T, Basava-Reddi L. Feasibility of monitoring techniques for substances mobilised by CO₂ storage in geological formations. *Energy Procedia* 2012; 23: 439-448.
- [33] Male E, Pickles W, Silver E, Hoffmann G, Lewicki J, Apple M, Repasky K, Burton E. Using hyperspectral plant signatures for CO₂ leak detection during the 2008 ZERT CO₂ sequestration field experiment in Bozeman, Montana. *Environmental Earth Sciences* 2010; 60: 251-261.
- [34] Bellante GJ, Powell SL, Lawrence RL, Repasky KS, Dougher TAO. Aerial detection of a simulated CO₂ leak from a geologic sequestration site using hyperspectral imagery. *International Journal of Greenhouse Gas Control* 2013; 13: 124-137.
- [35] Bateson L, Vellico M, Beaubien SE, Pearce JM, Annunziatellis A, Ciotoli G, Coren F, Lombardi S, Marsh S. The application of remote-sensing techniques to monitor CO₂-storage sites for surface leakage: Method development and testing at Laterra (Italy) where naturally produced CO₂ is leaking to the atmosphere. *International Journal of Greenhouse Gas Control* 2008; 2: 388-400.
- [36] Govindan R, Korre A, Durucan S, Imrie CE. A geostatistical and probabilistic spectral image processing methodology for monitoring potential CO₂ leakages on the surface. *International Journal of Greenhouse Gas Control* 2011; 5: 589-597.
- [37] Govindan R, Korre A, Durucan S. Application of an unsupervised methodology for the indirect detection of CO₂ leakages around the Laacher See in Germany using remote sensing data. *Energy Procedia* 2013; 37: 4057-4064.
- [38] Lewicki JL, Hilley GE, Dobeck L, Spangler L. Dynamics of CO₂ fluxes and concentrations during a shallow subsurface CO₂ release. *Environmental Earth Sciences* 2009; 60: 285-297.
- [39] Stone LD. Theory of optimal search. *Operations Research Society of America*: 1975.