



**British  
Geological Survey**

NATURAL ENVIRONMENT RESEARCH COUNCIL

# Explanatory notes to accompany the Groundwater Vulnerability Index GIS for Glasgow City Council

Groundwater Systems and Water Quality Programme

A report for Glasgow City Council

Commissioned Report CR/03/204N



BRITISH GEOLOGICAL SURVEY

COMMISSIONED REPORT CR/03/204N

# Explanatory notes to accompany the Groundwater Vulnerability Index GIS for Glasgow City Council

B É Ó Dochartaigh

The National Grid and other  
Ordnance Survey data are used  
with the permission of the  
Controller of Her Majesty's  
Stationery Office.  
Ordnance Survey licence number  
GD 272191/1999

*Key words*

Groundwater vulnerability index,  
Glasgow

*Bibliographical reference*

Ó DOCHARTAIGH B É. 2003.  
Explanatory notes to accompany  
the Groundwater Vulnerability  
Index GIS for Glasgow City  
Council. *British Geological  
Survey Commissioned Report*,  
CR/03/204N. 15pp.

## BRITISH GEOLOGICAL SURVEY

The full range of Survey publications is available from the BGS Sales Desks at Nottingham and Edinburgh; see contact details below or shop online at [www.thebgs.co.uk](http://www.thebgs.co.uk)

The London Information Office maintains a reference collection of BGS publications including maps for consultation.

The Survey publishes an annual catalogue of its maps and other publications; this catalogue is available from any of the BGS Sales Desks.

*The British Geological Survey carries out the geological survey of Great Britain and Northern Ireland (the latter as an agency service for the government of Northern Ireland), and of the surrounding continental shelf, as well as its basic research projects. It also undertakes programmes of British technical aid in geology in developing countries as arranged by the Department for International Development and other agencies.*

*The British Geological Survey is a component body of the Natural Environment Research Council.*

### **Keyworth, Nottingham NG12 5GG**

☎ 0115-936 3241 Fax 0115-936 3488

e-mail: [sales@bgs.ac.uk](mailto:sales@bgs.ac.uk)

[www.bgs.ac.uk](http://www.bgs.ac.uk)

Shop online at: [www.thebgs.co.uk](http://www.thebgs.co.uk)

### **Murchison House, West Mains Road, Edinburgh EH9 3LA**

☎ 0131-667 1000 Fax 0131-668 2683

e-mail: [scotsales@bgs.ac.uk](mailto:scotsales@bgs.ac.uk)

### **London Information Office at the Natural History Museum (Earth Galleries), Exhibition Road, South Kensington, London SW7 2DE**

☎ 020-7589 4090 Fax 020-7584 8270

☎ 020-7942 5344/45 email: [bgs london@bgs.ac.uk](mailto:bgs london@bgs.ac.uk)

### **Forde House, Park Five Business Centre, Harrier Way, Sowton, Exeter, Devon EX2 7HU**

☎ 01392-445271 Fax 01392-445371

### **Geological Survey of Northern Ireland, 20 College Gardens, Belfast BT9 6BS**

☎ 028-9066 6595 Fax 028-9066 2835

### **Maclean Building, Crowmarsh Gifford, Wallingford, Oxfordshire OX10 8BB**

☎ 01491-838800 Fax 01491-692345

### *Parent Body*

### **Natural Environment Research Council, Polaris House, North Star Avenue, Swindon, Wiltshire SN2 1EU**

☎ 01793-411500 Fax 01793-411501

[www.nerc.ac.uk](http://www.nerc.ac.uk)

# Contents

<b>Contents.....</b>	<b>i</b>
<b>1 Introduction .....</b>	<b>2</b>
<b>2 Overview of Bedrock and Superficial Geology .....</b>	<b>3</b>
<b>3 Aquifer Permeability and Groundwater Vulnerability .....</b>	<b>4</b>
3.1 Bedrock Geology Permeability.....	5
3.2 Superficial Geology Permeability.....	5
<b>4 The Groundwater Vulnerability Index map.....</b>	<b>7</b>
<b>5 Clay Thickness.....</b>	<b>8</b>
<b>6 Water Boreholes .....</b>	<b>8</b>
<b>7 Copyright .....</b>	<b>8</b>
 Figure 1 Illustration of groundwater vulnerability index categories based on bedrock and superficial geology .....	7
Figure 2 Glasgow Bedrock Geology Permeability .....	9
Figure 3 Glasgow Superficial Geology Permeability .....	10
Figure 4 Glasgow Groundwater Vulnerability Index .....	11
Figure 5 Water Boreholes in Glasgow.....	12

# 1 Introduction

These notes are designed to accompany the ArcView geographical information system (GIS) format groundwater vulnerability index map produced by the British Geological Survey (BGS) for Glasgow City Council. The map is based on digital geological information for both bedrock and superficial deposits. It covers the whole of the Glasgow City Council area plus a 'buffer zone' to account for peripheral data.

The purpose of the GIS map is to indicate, in broad terms, the vulnerability of groundwater to pollution. Groundwater is contained within aquifers of various types. Abstraction from these aquifers provides water for potable supplies and various domestic, industrial and agricultural uses. Some highly permeable aquifers are very productive and of regional importance as sources for public water supply; other, less permeable formations, are of local importance for domestic, agricultural and industrial supplies. Groundwater also provides the baseflow to surface watercourses. Groundwater is typically of high quality and often requires little or no treatment before use. However, it is vulnerable to contamination from both diffuse and point source pollutants, from direct discharges into groundwater and indirect discharges into and onto land. Aquifer remediation is difficult, prolonged and expensive: therefore, the prevention of pollution is important.

The approach and classifications used in the production of the groundwater vulnerability index can also be used in the assessment of specific land use practices, proposed developments and land use changes over aquifers where these could have an impact on groundwater quality. More detailed site specific assessment of vulnerability will be required where it is considered that development may have an impact on groundwater quality.

This GIS and printed maps are a compromise between the representation of natural complexity and the simplicity of interpretation at a scale of 1:50,000. This places limitations on the resolution and precision of map information. There is a wide variety of geological strata and potential pollutants, and the vulnerability index classification is, of necessity, generalised. Individual sites and circumstances will always require further and more detailed assessment to determine the specific impact on groundwater resources. The map coverages in the GIS only represent geological conditions (bedrock or superficial) as mapped at their upper surface. Where these formations have been disturbed or removed, for example, during mineral extraction or where worked ground exists in urban areas, the actual vulnerability of groundwater may be altered from natural conditions. Hence, where there is evidence of ground disturbance, site-specific data should be collected and used to determine the vulnerability of groundwater.

The overall permeability of each geological unit has been interpreted to produce an index of the vulnerability of groundwater occurring in Glasgow, and provides a broad-based view of both the vulnerability of groundwater and the location of the more permeable aquifers in Glasgow.

The data used to interpret the groundwater vulnerability index are derived from the 1:50 000 DigMap bedrock and superficial geology coverage. The GIS and associated maps should not therefore be used at scales larger than 1:50 000. Locations of thick clays have been interpreted and drawn based on BGS borehole records. Information on water boreholes is derived from the British Geological Survey Scottish Water Borehole database.

## 2 Overview of Bedrock and Superficial Geology

The majority of the Glasgow area is underlain by Carboniferous sedimentary rocks, with minor outcrops of contemporaneous and intrusive igneous rocks. The Carboniferous sedimentary rocks include the Coal Measures, the Passage Formation, Lawmuir Formation, and the Limestone Coal, Lower Limestone and Upper Limestone formations. These consist largely of repetitive, cyclical sedimentary sequences of sandstone, siltstone and mudstone, with thin bands of coal. Small outcrops of volcanoclastic sedimentary rocks (the Kirkwood Formation) occur in the south of the area. Contemporaneous igneous rocks include the basaltic lava flows of the Clyde Plateau Volcanic Formation that form the terraced plateau of the Campsie Fells and the trap featuring of the escarpments of the Kilpatrick Hills, which were formed as part of large scale volcanic eruptions in early Carboniferous times. Later igneous intrusions date from late Carboniferous to early Permian age, and consist largely of doleritic dykes and sills.

During successive Quaternary glaciations there was extensive deposition of glacial till. The till normally rests on bedrock, and generally consists of cobbles, boulders and pebbles mixed with clay, sand and silt. Till deposits in the Glasgow area are often heavily compacted. As the ice sheets melted, glaciofluvial sands and gravels were deposited over the till in meltwater streams. Most of the Quaternary deposits now present at the surface date from the last period of glaciation, but some have survived from earlier glaciations.

During deglaciation, sand and gravel deposits were also deposited as deltaic fans in ice-marginal lakes, seen now largely in the eastern parts of Glasgow. Fine-grained glaciolacustrine silts and clays were also laid down in these lakes.

The weight of the ice during glaciation caused an isostatic lowering of the ground beneath. At the end of glaciation, melting ice and delays in the isostatic rebound of the lowered ground resulted in sea levels that were much higher than today. These high seas laid down extensive spreads of raised marine deposits – sands, gravels, clays and silts – along the low ground adjacent to the present River Clyde. Once sea levels reached levels similar to today, alluvium began to be deposited on the flood plains of the Clyde and other rivers in the area. The dominant alluvial deposits in the area are sands and gravels. The other main post-glacial deposit is peat, which occurs largely over upland areas.

### 3 Aquifer Permeability and Groundwater Vulnerability

The permeability of a geological unit determines the ease with which groundwater can flow through it. In sedimentary rocks such as sandstone, groundwater flows along intergranular flowpaths between individual sand grains, as well as through fractures and other voids. Sandstones can vary greatly in permeability, but are often among the most highly permeable and porous (able to store groundwater) rock units. In limestones, groundwater flow and storage is almost entirely within fractures. If these fractures are well developed, limestones can be highly permeable.

The only bedrock unit in the Glasgow area that is classified as having high permeability is the Passage Formation, which is dominated by sandstones. The Passage Formation is typically a highly productive aquifer, able to support large abstractions.

Most bedrock units in the Glasgow area are classified as moderately permeable, including the Coal Measures and the Limestone Coal, Lower Limestone and Upper Limestone formations. These aquifers will seldom support large abstractions, but are important for small local abstractions and in supplying baseflow to rivers.

The bedrock units with low permeability overall include the lavas of the Clyde Plateau Volcanic Formation, and various intrusive igneous rocks. Although they have low permeability, groundwater flow can occur in these rocks via fractures, generally at shallow depths and at local scales. Many of these rocks can support small domestic abstractions, as well as supply baseflow to streams and rivers. In such rocks, there may still be a degree of risk of contamination if polluted water enters fractures.

Superficial deposits over most of the inland areas of Glasgow comprise glacial till. The prevalence of clay material within the till, and the degree of compaction common in tills across the area, mean that they typically have low permeability. Other low permeability superficial deposits include raised marine and glaciolacustrine clays and silts. Along the main Clyde there are abundant deposits of high permeability sand and gravel, which are of alluvial, glaciofluvial and raised marine origin.

The groundwater vulnerability index map is based on the general assumption that where more highly permeable formations crop out at the ground surface, water can infiltrate rapidly to the water table. Where less permeable formations, such as clayey superficial deposits, or igneous rocks, crop out at the surface, a larger proportion of the rainfall falling on the ground will flow directly to surface watercourses instead of soaking into the ground. If there is a source of contamination at or near the ground surface, high permeability formations are therefore more likely to receive large quantities of polluted groundwater. They are also more likely to be useful aquifers. High permeability formations are therefore more vulnerable to pollution. However, fractured rock, even if it has low permeability, and is not capable of receiving large quantities of groundwater (such as igneous rock), may remain vulnerable to contamination because even small groundwater flows in fractures can rapidly transport any pollutants.

Permeable superficial deposits can act both as aquifers in their own right, and as pathways for groundwater to reach underlying bedrock aquifers. Areas where high permeability superficial deposits overlie low or moderate permeability bedrock; where high permeability superficial deposits overlie high permeability bedrock; and where high permeability bedrock outcrops at the surface, are, therefore, treated as equally vulnerable on the vulnerability map.

Where a thick clayey superficial deposit overlies a permeable aquifer, the clay can act to impede the downward movement of pollutants, and thus act as a protective cover. However, where there are relatively thin sandy clay layers (generally less than 5 metres), a certain amount of recharge to deeper aquifers may occur. The GIS distinguishes where low permeability superficial deposits



overlie high permeability bedrock aquifers (shown as a pink colour), but it should not be assumed that this low permeability superficial layer always acts as an effective barrier, as there may be significant variations in its thickness, and it may be fractured in some areas.

The detailed identification, location, thickness and extent of clayey deposits can be difficult due to a lack of data. However, an interrogation of BGS borehole records has been made and these have been interpreted to show where there is a strong probability that there is greater than 5 metres thickness of clay in the drift sequence. This is shown on the maps as a transparent hatched overlay. This information is limited only to where borehole geological data are present, and, therefore, represents the likely minimum extent of thick clayey superficial deposits, rather than a comprehensive coverage.

### **3.1 BEDROCK GEOLOGY PERMEABILITY**

The bedrock has been divided into three major groups based on permeability (High, Moderate and Low), shown on the map in Figure 2. Each bedrock unit has also been given a code signifying the level of confidence in the permeability classification, where 1 is most confident and 3 is least confident. Most units are coded 1. Lower confidence is given to bedrock units that are known to have varying permeability characteristics within the same unit. This is the case with all of the Carboniferous sedimentary rocks, because they are largely comprised of mixed sequences of different rock types. Within these sequences, sandstone horizons may have high permeability, limestone and some siltstone horizons may have moderate permeability, and mudstones and some siltstones may have low permeability; the overall permeability of the unit as a whole, however, is likely to be moderate. The groups include the following rock units:

*High Permeability:*

*(Red on GIS)*

- Passage Formation (largely sandstones)

*Moderate Permeability:*

*(Yellow on GIS)*

- Carboniferous sedimentary rocks

*Low Permeability:*

*(Green on GIS)*

- Volcanic and intrusive igneous rocks of all ages

### **3.2 SUPERFICIAL GEOLOGY PERMEABILITY**

Superficial deposits are divided into two groups according to permeability (High and Low), shown on the map in Figure 3. No superficial deposits in the area are classified as moderately permeable. A third category covers a number of small areas across the map where superficial geology is classed as ‘unknown’ on the 1:50 000 digital geology coverage. Areas uncoloured on the superficial geology permeability map are those areas where no superficial cover is mapped.

The coverage of superficial deposits in the Glasgow area is highly variable, and some of the Quaternary mapping is relatively old and does not account for recent advances in drift typology techniques. Many of the drift units are internally heterogeneous, often composed of sands, gravels, silts and clays in varying amounts at different locations, but have been mapped as a single unit. Parts of such a unit may, therefore, be relatively permeable, while other parts are much less permeable. The classifications used in the groundwater vulnerability index, described below, represent the best attempt at interpreting such units in terms of their overall permeability.

In most cases this has been done using a precautionary principle, whereby if a superficial unit is expected to be highly permeable in some parts and have moderate or low permeability in others, it is classified as highly permeable throughout. For example, alluvium in some areas is known to be a highly heterogeneous deposit comprising sands, gravels, silts and clays in varying proportions. In most areas it is likely to be moderately permeable, but some parts comprise highly permeable sands and gravels, and therefore it is classified as highly permeable.

Each superficial unit has also been given a code signifying the level of confidence in the permeability classification, where 1 is most confident and 3 is least confident. Lower confidence is given to superficial units that are known to have varying permeability characteristics within the same unit, such as alluvium in the example above. The confidence code 0 is given to areas where the superficial geology is mapped as 'unknown'. The groups include the following units:

*High permeability:*

*(Red on GIS)*

- Alluvial, glaciofluvial, and raised marine deposits comprising sands and gravels, and mixed sequences which are expected to contain significant amounts of sand and gravel

*Moderate permeability:*

*(Yellow on GIS)*

- Head and hummocky glacial deposits
- Salt marsh and lacustrine deposits

*Low permeability:*

*(Green on GIS)*

- Glacial till diamicton<sup>1</sup> deposits
- Peat
- Glaciolacustrine clays and silts

---

<sup>1</sup> A general term for any unsorted, unstratified sediment regardless of its genesis. Diamicts may be formed in various situations: glaciation, mudflow, landslide, avalanche, and turbidity current. Till is a special kind of diamicton that was formed directly from glacier ice. The terms diamictite and tillite are used for the ancient, consolidated equivalents of diamicton and till sediments.

## 4 The Groundwater Vulnerability Index map


The basic assumption made in defining the vulnerability index categories shown in the GIS and printed map (Figure 4) is that high aquifer permeability equates with a high groundwater vulnerability index: i.e. pollutants at ground level are able to migrate downwards more easily and in greater volume where permeable material such as gravel or sandstone is present. Formations of this type are, therefore, more vulnerable than others.

The vulnerability index map incorporates both the bedrock and drift permeability classifications previously described to produce twelve combinations of bedrock and drift permeability. These combinations are referred to by two-letter codes: 'HH', 'HM', etc. The letters are as follows:

- H High permeability
- M Moderate permeability
- L Low permeability
- N No drift cover present over the bedrock formation
- U Where drift geology is classified as unknown on the digital geology coverage

The first letter in the code refers to the bedrock permeability and the second letter to the drift permeability. For example, 'HM' refers to High Permeability bedrock overlain by Moderate Permeability drift.

These twelve possible combinations have then been grouped into three main categories of groundwater vulnerability labelled 'High' (red on map), 'Moderate' (yellow) and 'Low' (green). A sub-category, (pink on map), shows areas where a highly permeable bedrock aquifer is covered by low permeability superficial deposits (glacial till or other clayey drift). It should be noted that the thickness, and therefore the effectiveness, of this clay as a barrier to pollution is uncertain.

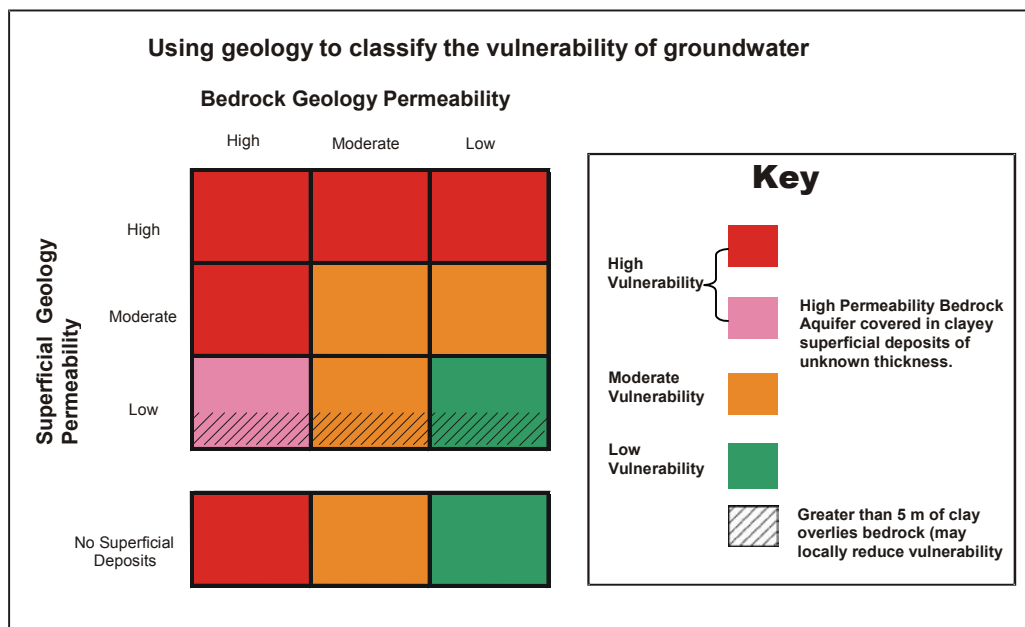

**Figure 1 Illustration of groundwater vulnerability index categories based on bedrock and superficial geology**

The vulnerability categories are summarised in Figure 1. For anywhere in the Glasgow area where there is a highly permeable aquifer present beneath the ground surface, either bedrock or superficial, the map is coloured red or pink to denote high vulnerability. Aquifers (bedrock or superficial) of moderate permeability are coloured yellow to indicate an overall moderate vulnerability (except where a moderately permeable bedrock aquifer is combined with a highly permeable superficial aquifer). Areas where low permeability formations occur, where groundwater is least vulnerable, are coloured green. There still remains a risk of groundwater pollution within areas classified as moderate or low vulnerability, but owing to the overall low permeability this risk, and therefore the vulnerability of groundwater, is considered to be lower.

There are a number of small areas where superficial geology is unknown (see section 3.2). These areas are distinguished on the groundwater vulnerability index map because it is impossible to determine groundwater vulnerability (in either bedrock or superficial aquifers) without taking the permeability of superficial deposit into account.

## 5 Clay Thickness

Another overlay, shown on the GIS maps as a transparent hatching, shows where there is a strong probability that a cumulative thickness of 5 metres or more of clay is present in the superficial sequence. Because this sequence can be highly heterogeneous, high permeability sands and gravels may crop out at the surface while at depth there is a thick sequence of till or lacustrine clays. Any bedrock aquifers beneath these areas will receive a certain amount of protection from the clay layer in the superficial deposits, which will inhibit recharge to the bedrock aquifer. The information to create this overlay is derived from BGS borehole archives. It should be noted that where no hatching is present it does not necessarily mean that there is less than 5 metres thickness of clayey superficial deposits. In many areas a lack of borehole records make it impossible at present to identify the presence of clays. In addition, even where a total of 5 metres or more of clay is present in the drift sequence, not all superficial aquifers will necessarily receive protection, as they may overlies much or all of the clay.

## 6 Water Boreholes

The GIS also contains a shapefile with the locations and details of known water boreholes in Glasgow, taken from the British Geological Survey Scottish Water Borehole database (locations of boreholes shown in Figure 5).

## 7 Copyright

The digital line work and vulnerability classifications on the GIS are the intellectual property of the British Geological Survey and the use of the GIS is subject to a licence agreement between the Council and BGS. It follows that the GIS should only be used by Glasgow City Council for internal purposes and therefore should not be given or lent to a third party.



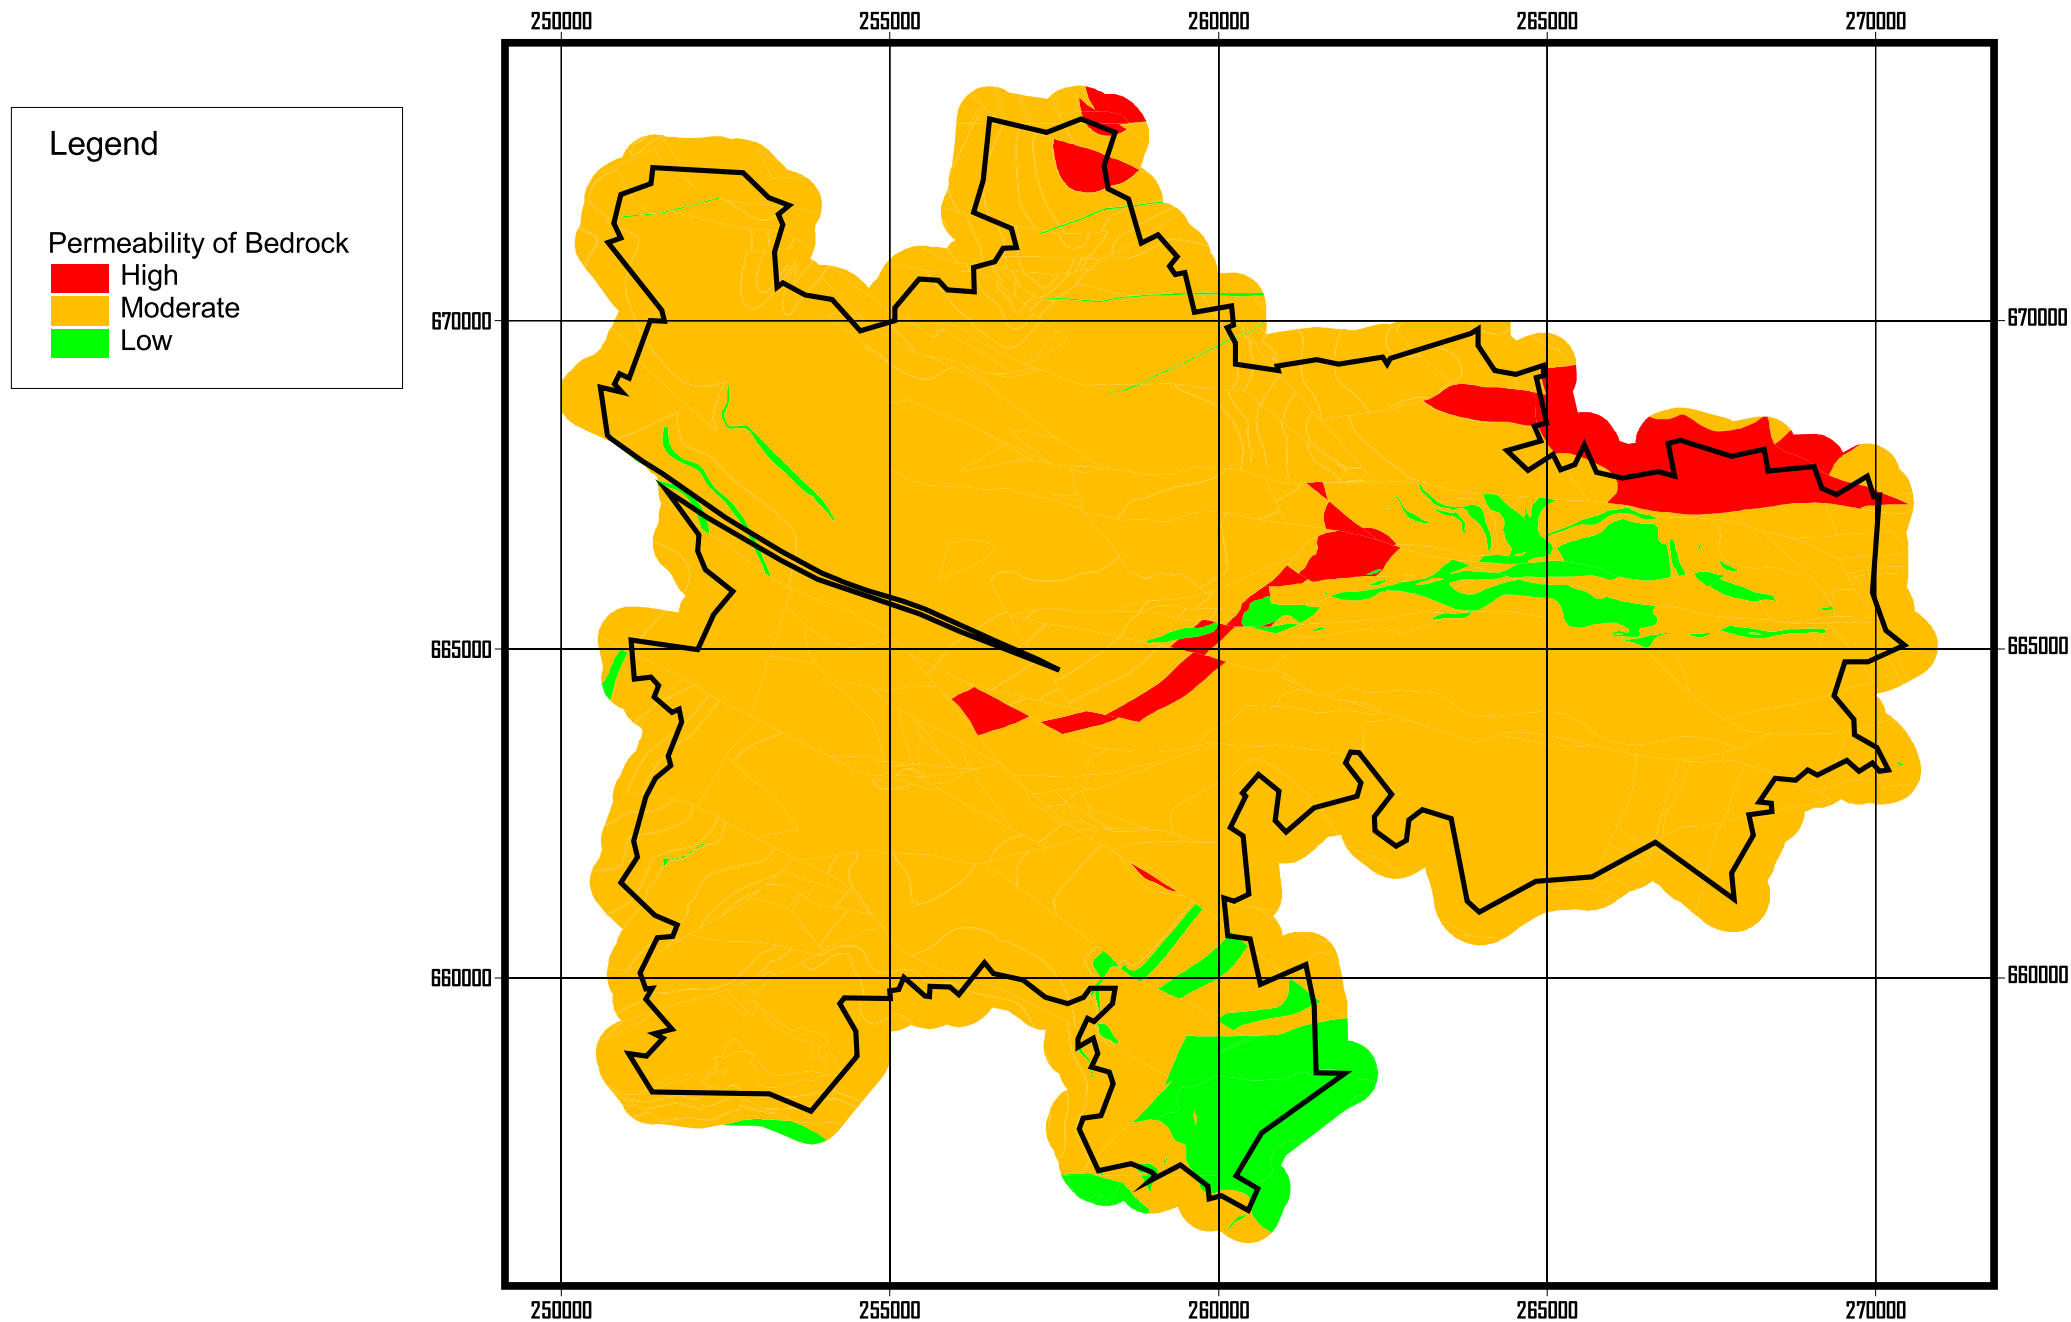


Figure 2 Glasgow - Bedrock Permeability

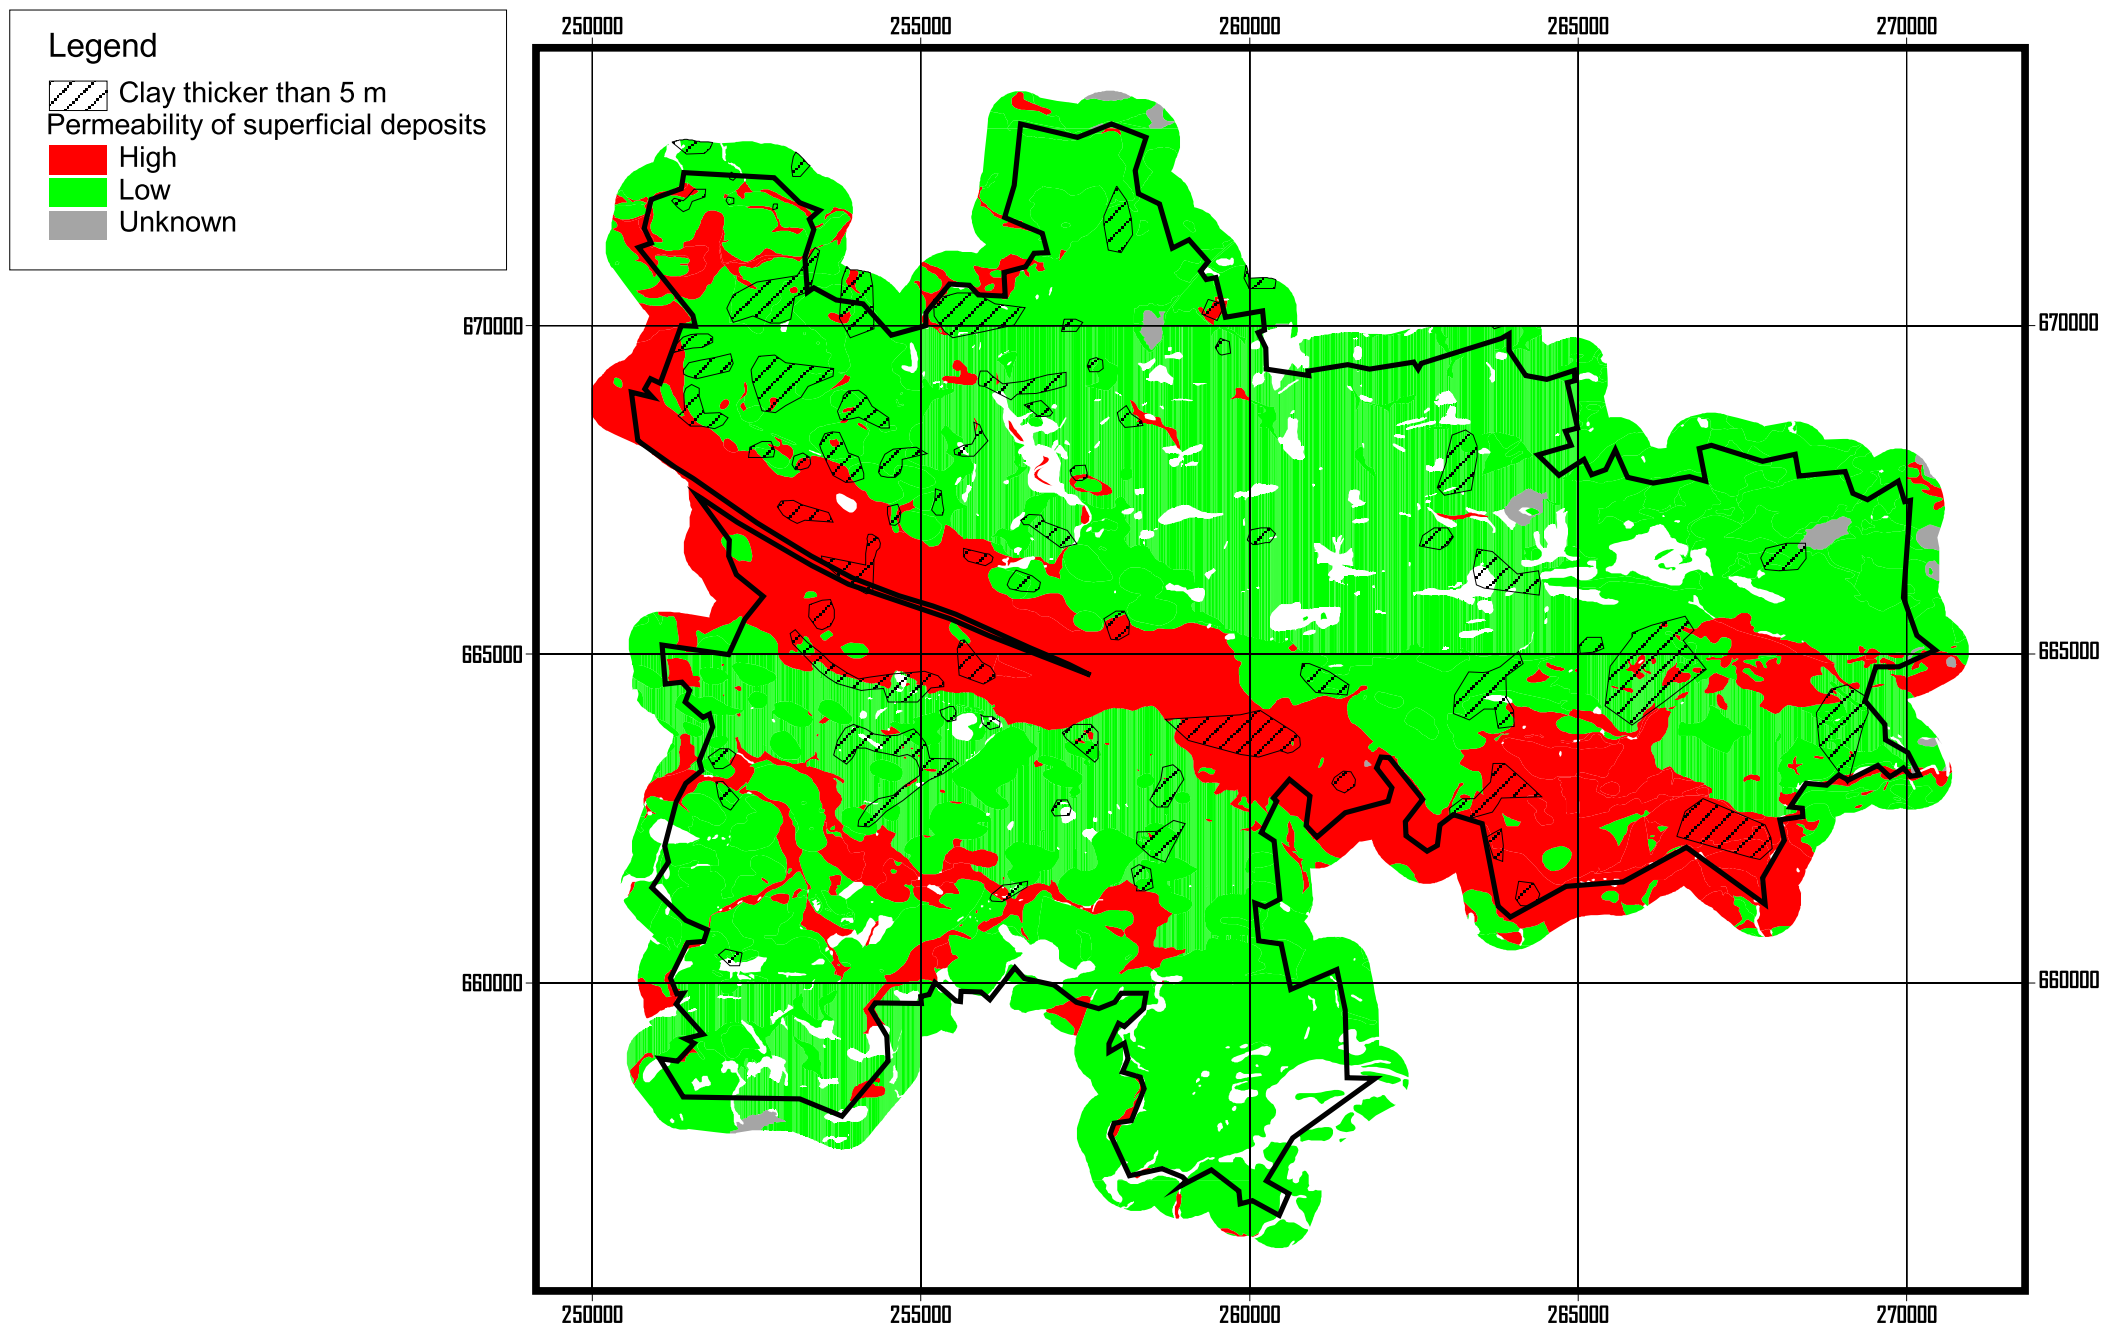

**Figure 3 Glasgow - Superficial Deposits Permeability**

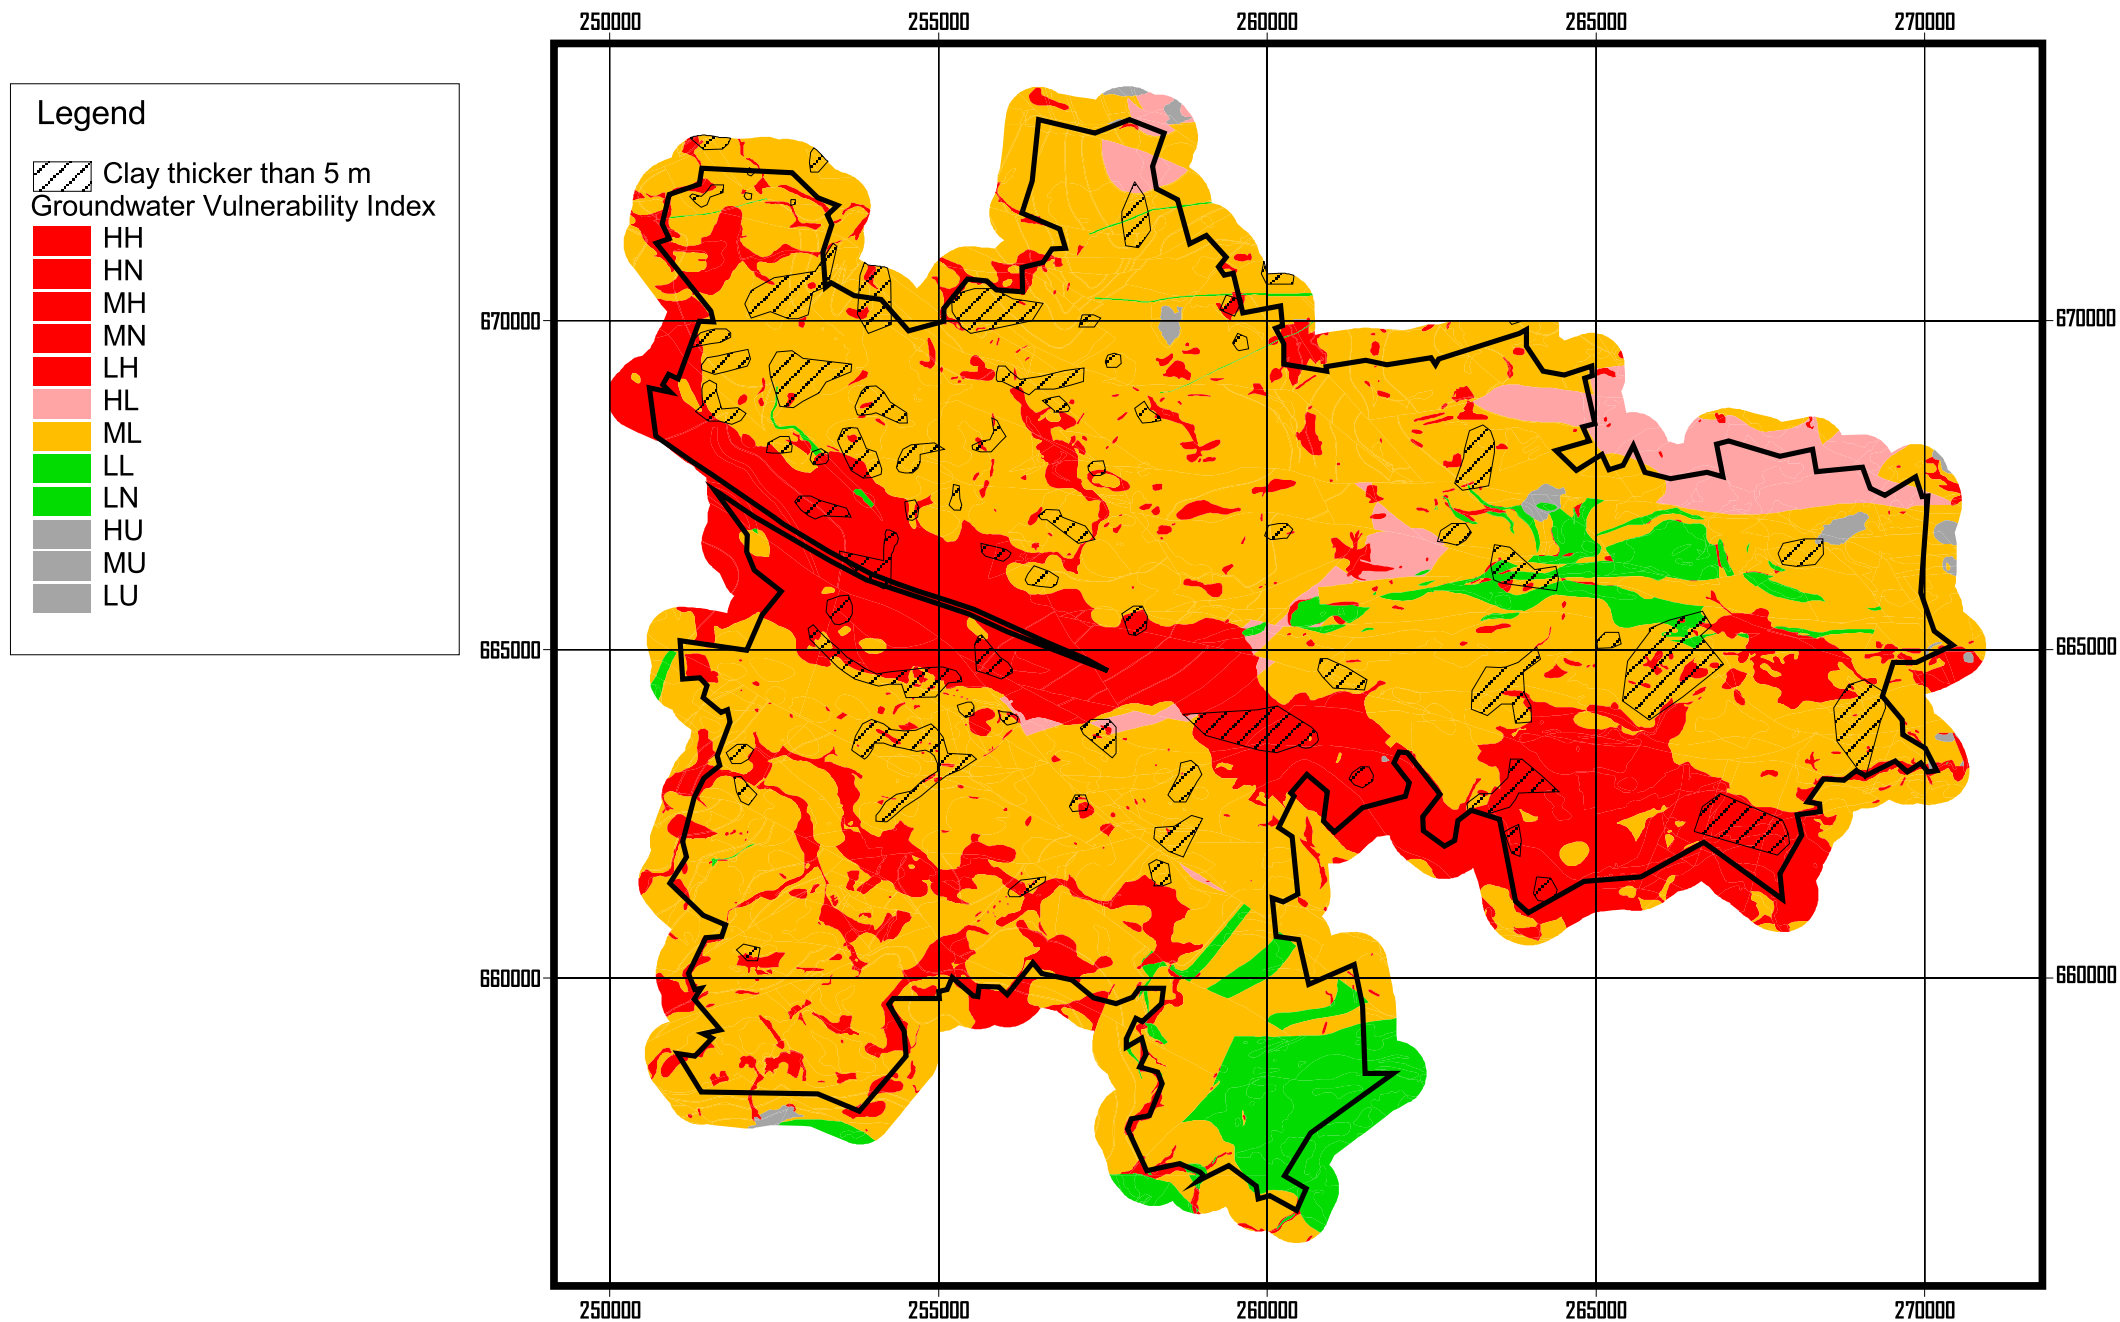

**Figure 4 Glasgow - Groundwater Vulnerability Index**

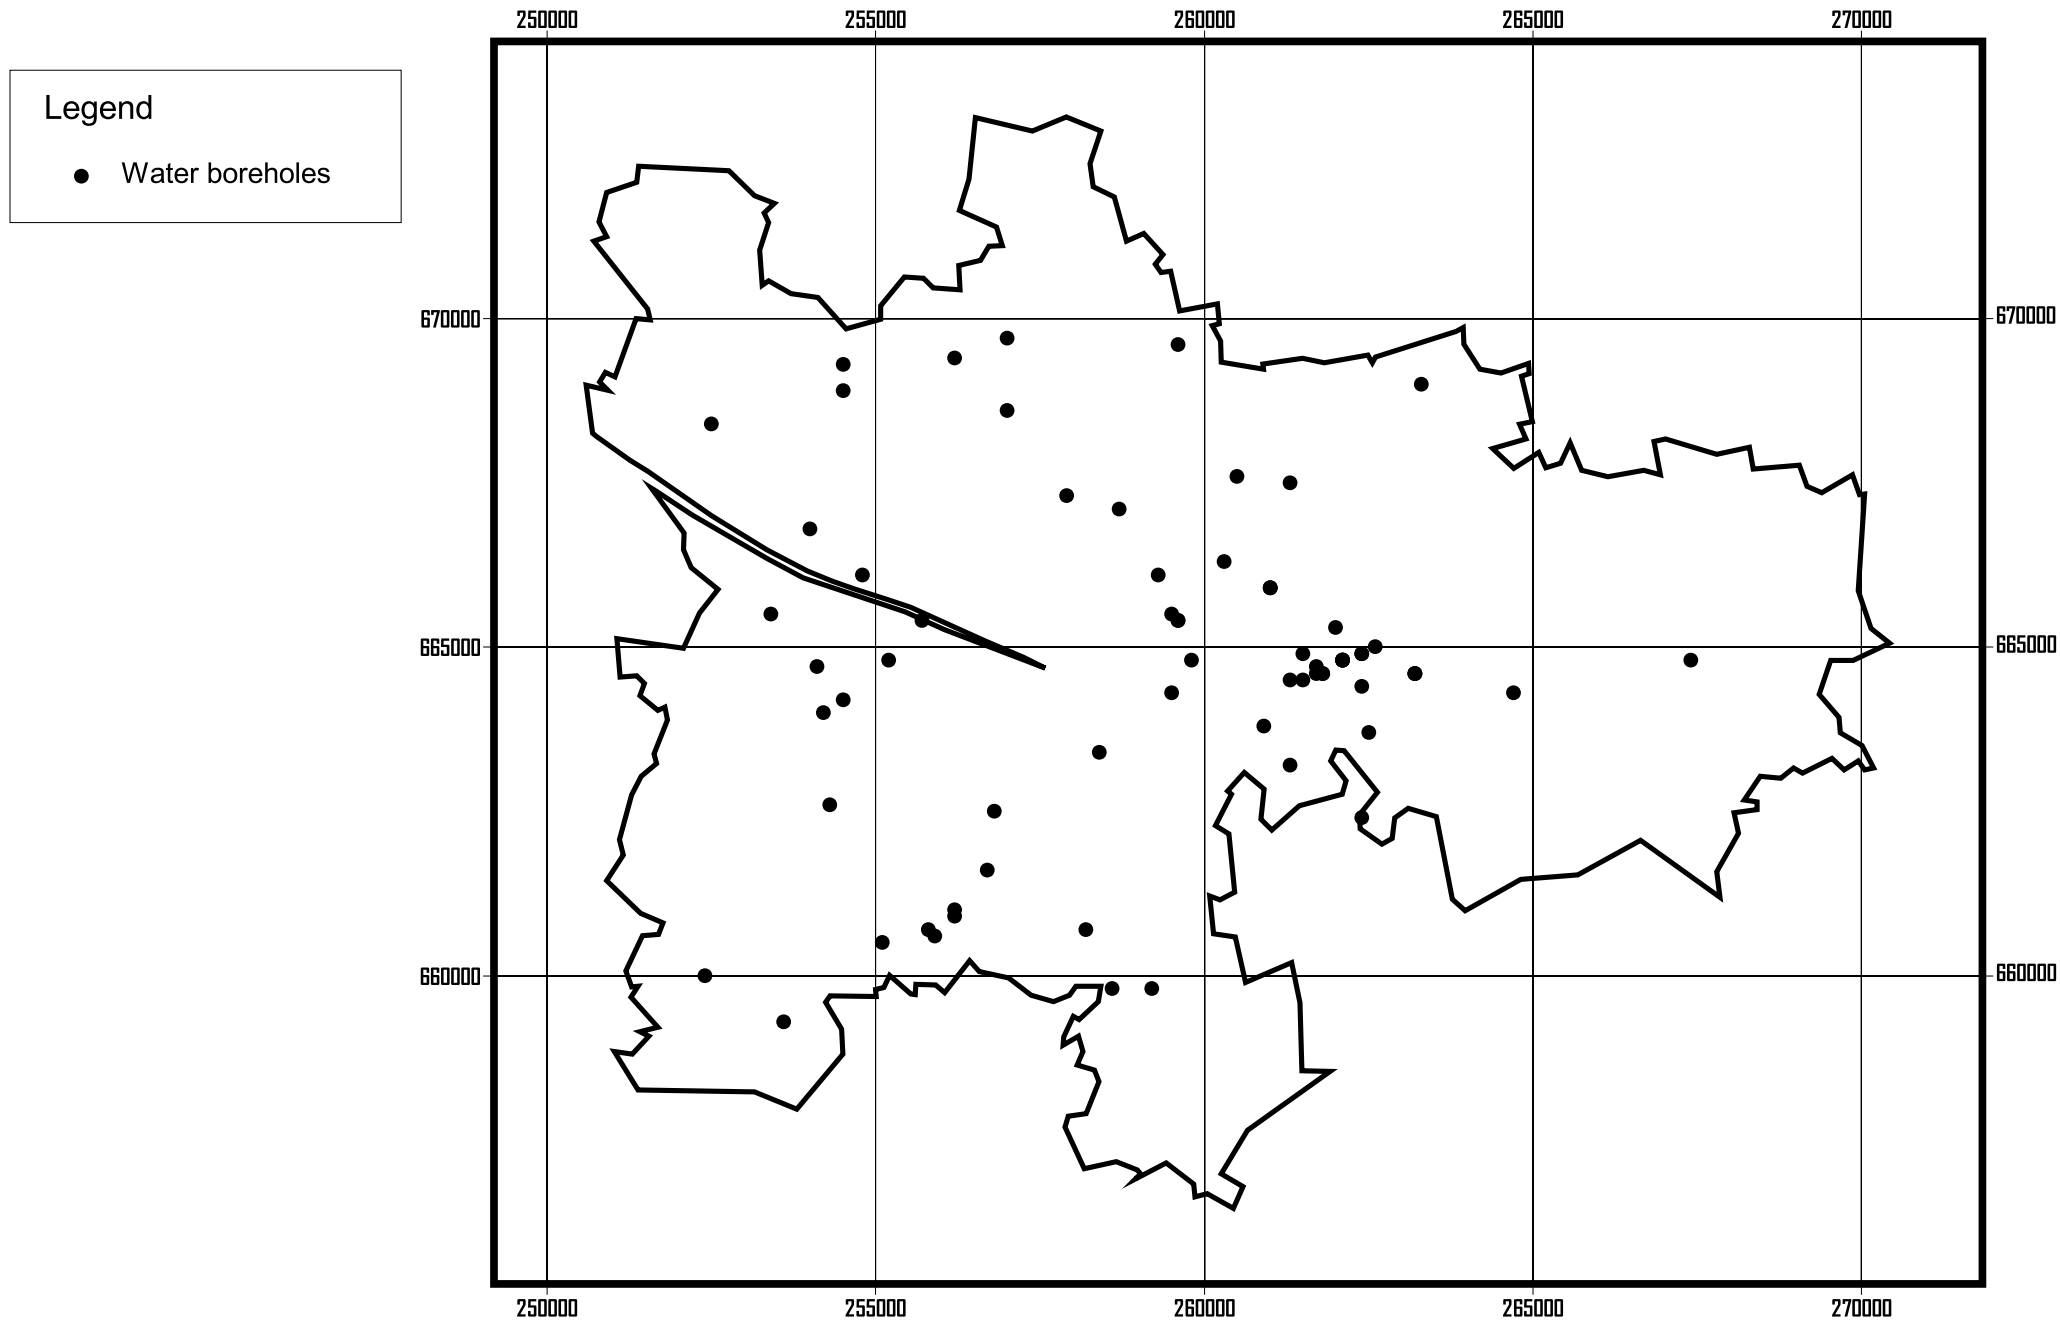


Figure 5 Glasgow - Water Boreholes