



The temperature of Britain's coalfields

G. Farr^{1*}, J. Busby², L. Wyatt³, J. Crooks³, D.I. Schofield⁴ and A. Holden¹

¹ British Geological Survey, Park Place, Cardiff CF10 3AT, UK

² British Geological Survey, Nicker Hill, Keyworth NG12 5GG, UK

³ The Coal Authority, 200 Lichfield Lane, Mansfield NG18 4RG, UK

⁴ British Geological Survey, The Lyell Centre, Edinburgh EH14 4AP, UK

GF, 0000-0002-1821-3122; JB, 0000-0002-4686-2963; LW, 0000-0003-4141-9652; DIS, 0000-0002-2669-5627

* Correspondence: garthf@bgs.ac.uk

Abstract: Low-temperature heat recovery, cooling and storage schemes, using abandoned flooded mine workings, are a viable option for low-carbon heating solutions within many abandoned British coalfields. The temperature of mine water is a useful parameter, coupled with depth to water, sustainable yield and recharge potential, to identify suitable locations and calculate the likely performance of heat recovery schemes. This paper aims to provide the first mapping and synthesis of the temperature of Britain's coalfields to support this emerging technology. Using the best available evidence, a median geothermal gradient of 24.1°C km⁻¹ was calculated for the British coalfields. However, geothermal gradients between separate coalfields can vary from 17.3 to 34.3°C km⁻¹. The North East, Cumbria and Yorkshire coalfields all have mean geothermal gradients generally >30°C km⁻¹, whereas geothermal gradients of generally <23°C km⁻¹ are measured in the Warwickshire, South Wales, Staffordshire, Douglas and Fife coalfields. Active dewatering schemes are shown to locally increase the apparent measured geothermal gradient by ingress and mixing of deeper water into the pumping shafts. This baseline spatial mapping and synthesis of coalfield temperatures offers significant benefit to those planning, designing and regulating heat recovery and storage in Britain's abandoned coalfields.

Received 17 June 2020; **revised** 4 September 2020; **accepted** 8 September 2020

As the UK moves towards a low-carbon, clean growth economy (BEIS 2017), it will need to significantly reduce its greenhouse gas emissions to meet an ambitious target of net zero for all greenhouse gases by 2050 (CCC 2019). Currently, heating in homes, businesses and industrial processes is responsible for a third of the UK's greenhouse gas emissions (BEIS 2018). Despite this, progress to decarbonize heating has been 'too slow' (CCC 2019) and remains a significant challenge across all types of building stock. It is thought that a mixture of renewable technologies could provide solutions for low-carbon space heating and cooling, including electrification of heating using renewable sources, solar thermal, air- or water-source heat pumps, or ground source heat pumps (coupled to either closed-loop heat exchangers or 'open-loop' groundwater circulation).

Following the closure of the majority of the British underground coal mines during the 1980s–1990s, the requirement to dewater ceased and many collieries were left to progressively flood (Fig. 1). The resulting mine water often has undesirable water chemistry and may be aggressive or acidic, with high iron and sulphate arising from oxidation of pyrite and associated precipitation of ochre (Banks and Banks 2001). Most pre-treatment mine water is unusable for potable, industrial or agricultural uses, and can cause significant pollution events if allowed to enter surface waters or aquifers. Surface breakouts often occur along river valleys, where natural discharge points from mine water systems develop. Because of these challenges, mine water has historically been considered as a liability, requiring treatment to prevent environmental damage. In response to rising mine water levels and resulting outbreaks into surface water systems, mine water treatment schemes were constructed across Britain by the Coal Authority (National Rivers Authority 1994; Environment Agency 2008). However, more recently, as the potential for heat recovery and storage is being revisited, mine water is increasingly being regarded as a potential geo-energy asset (Younger 2014, 2016).

In Britain the majority of reported operational heat recovery schemes in coalfield areas are designed around open-loop systems using an abstraction and return borehole or shaft (Banks *et al.* 2004, 2009, 2017; Burnside *et al.* 2016a; Farr *et al.* 2016; Al-Habaibeh *et al.* 2019; LoCAL 2019; Townsend *et al.* 2020). An open-loop system at Dawdon, North East England, is supplied by mine water abstracted from a shaft before it is treated and discharged to the sea (Bailey *et al.* 2013). Other operational heat recovery systems include a single shaft, or 'standing column' system (Anthresh *et al.* 2015; Burnside *et al.* 2016a, b; Al-Habaibeh *et al.* 2019) and also a closed-loop heat exchanger in a surface treatment lagoon (Banks *et al.* 2017). The locations of closed-loop schemes are not available on an open register, so it is not possible to quantify how many are installed in Coal Measures strata. Reported examples of closed-loop schemes include the Dunston Innovation Centre in Chesterfield (Banks 2012), which includes 32 boreholes arranged in a 4 by 8 grid array and is used for both heating and cooling.

In the deepest parts of Coal Measures basins, below the worked coal seams, temperatures up to 80°C (East Midlands), 60°C (South Wales) and 100°C (Cheshire) could be expected (Busby 2014); however, low permeabilities make these targets less attractive for geothermal energy operations. In Britain wider deployment of open-loop low-temperature heat recovery from abandoned mine workings and upscaling to district systems, as demonstrated in Herleen, Netherlands (Verhoeven *et al.* 2014), still lags behind that of other countries (see global reviews; e.g. Hall *et al.* 2011; Preene and Younger 2014; Ramos *et al.* 2015).

Throughout Britain there is increasing awareness of the potential for heat recovery, cooling and storage using low-temperature water from abandoned coal mines. At the time of writing, 11 feasibility studies are in progress funded by HNDU (Heat Networks Delivery Unit), and several academic and commercial studies have been published both regionally and at a site scale (e.g. White Young

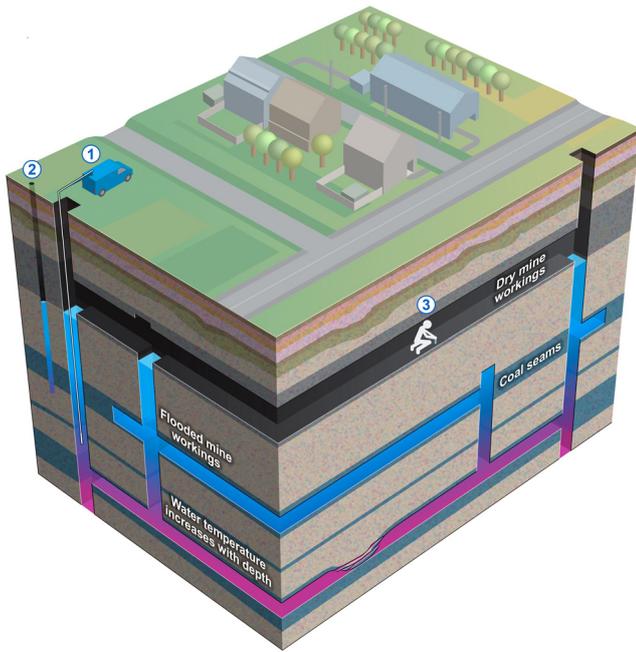


Fig. 1. Methods of temperature measurements in coalfields; 1–2, geophysical downhole logging of water-filled boreholes and shafts; 3, *in situ* coal seam measurements in operational ‘dry’ mines. Diagram is not to scale and is for illustrative purpose only. Amended by Craig Woodward, BGS after Ben Gilliland © BGS, UKRI.

Green 2007; Gillespie *et al.* 2013; Bailey *et al.* 2016; Farr *et al.* 2016; Harnmeijer *et al.* 2017; Brabham *et al.* 2019; Todd *et al.* 2019). Many cities and towns in Britain are located upon disused coalfields, and could provide a significant potential customer base for renewable energy schemes utilizing abandoned coal mines.

Heat recovery and storage in Britain’s coal mines is still in its infancy and many challenges need to be addressed, including the ownership of heat (Abesser *et al.* 2018), identification of flooded workings, development of regulatory and licensing frameworks (Stephenson *et al.* 2019) and high initial CAPEX costs (Townsend *et al.* 2020). A bespoke ‘geo-observatory’ is being constructed in Glasgow as part of the UK Geoenergy Observatories (UKGEOS) programme to characterize the hydrogeology of abandoned coal mine workings and address scientific questions associated with sustainable low-temperature heat recovery (Monaghan *et al.* 2017; Monaghan *et al.* 2019; Watson *et al.* 2019).

During the early stages of many mine water heat recovery projects one of the first questions to be asked is ‘how warm is the mine water?’, as higher temperatures can improve efficiency and result in greater available ΔT values. In addition to temperature there are many other factors that must be considered, including depth to viable water-filled targets, sustainable abstraction rates, discharge of used water and potential drilling challenges. These factors will influence the required drilling depth to targeted workings, energy required to pump mine water to the surface, heat lift required by a heat pump, capital cost and ultimately the viability of the overall scheme. This paper presents the first national-scale map of mine water temperatures in the British coalfields using the best available evidence. These maps and information within should be used to support early stage scoping or feasibility studies for new proposed heat recovery or storage schemes in abandoned coal mines.

Methods

As there is no single temperature dataset, measured using a consistent method that provides complete spatial coverage of

Britain’s coalfields, it was necessary to combine data from three sources: (1) recent Coal Authority downhole temperature profiles, from boreholes and shafts that intercept flooded workings; (2) the BGS UK Geothermal Catalogue (UKGC) including data from the National Coal Board, hydrocarbon boreholes and other investigative boreholes, representing both mined and unmined areas of the coalfields; (3) historical *in situ* strata temperatures measured directly in coal seams within operational coal mines. The various methods of temperature measurements are described below, and illustrated in Figure 1.

The Coal Authority has delineated 174 ‘Mine Water Blocks’ (MWB) for the majority of British coalfields. Most coalfields will consist of several MWB. MWB are based upon knowledge of hydrogeological connections (e.g. interconnected mine workings) or barriers (e.g. faults or unworked coal) and are delineated and updated by the Coal Authority. MWB are used in this study as they are the best currently available hydraulic units for the coalfields. Mine Water Blocks and the distribution of data points across the British coalfields are shown in Figure 2.

Downhole temperature profiles

The Coal Authority periodically undertake inspections, water sampling and downhole geophysical surveys of its shafts and boreholes. One of the probes used during the geophysical survey is an electrical conductivity and temperature probe. Calibrated and lowered from the back of a bespoke vehicle (Fig. 1), the probe measures mine water temperature every 1 cm to the base of the borehole or shaft, recording the data in a digital file. In total 148 downhole temperature profiles, measured as part of the Coal Authority’s monitoring programme between 2000 and 2019, were accessed for this study. In addition to the Coal Authority temperature profile data described above, other downhole temperature profiles were provided by Natural Resources Wales, UKGEOS-Glasgow, Environment Agency and Bridgend County Council.

The BGS UK Geothermal Catalogue

The BGS UK Geothermal Catalogue (UKGC) is managed by the British Geological Survey. It originated as an output from a series of reports as part of the ‘Investigation of the geothermal potential of the UK’ programme, UK Department of Energy and the European Commission 1976–1988 (Burley and Gale 1981; Thomas *et al.* 1983; BGS 1984, 1985; Holliday 1986; Browne *et al.* 1987). The catalogue was originally published in 1978 (Burley *et al.* 1978) and followed by three revisions (Burley and Gale 1982; Burley *et al.* 1984; Rollin 1987). Data from this catalogue were also used in earlier national-scale mapping of subsurface temperature across Britain (Busby *et al.* 2011). The UKGC also contains more recent data from sites including the ‘Newcastle Science Central borehole’ (Younger *et al.* 2016). The data in the BGS UKGC contain data from boreholes in both unmined and mined sections of the coalfields.

Coal strata temperatures

Between 1848 and 1924 various committees were established to gain a better scientific and practical understanding of ‘human endurance of high temperatures, and upon the possibility of reducing temperature of the air in contact with the heated strata’ (HMSO 1871). Three main phases of investigation were undertaken and strata temperature measurements were made in coal seams or small boreholes drilled within operational mines (Fig. 1). The strata temperature measurements have been collated for this study. We acknowledge that many of the collieries were actively dewatered and many were cooled with air and the impact of this upon the measured

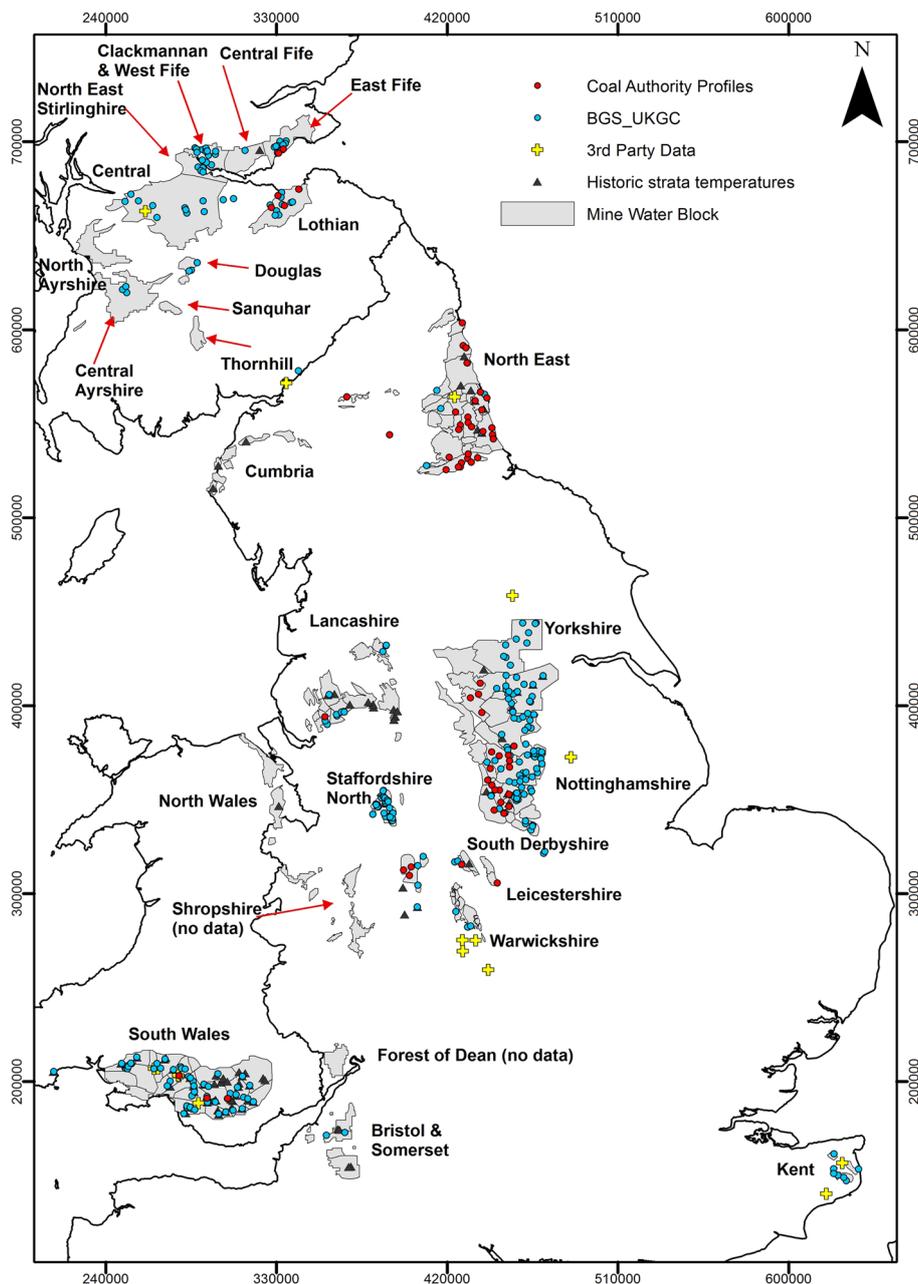


Fig. 2. Location of coalfield 'Mine Water Blocks' and data points used in this study. Contains Ordnance Survey data © Crown Copyright and database rights 2020. Contains Mine Water Blocks © Copyright Coal Authority (2020) all rights reserved and BGS, UKGC locations © BGS, UKRI.

rock strata temperatures is unknown. First, the Royal Coal Commission on Possible Depth of Workings 1866–1871 reported a total of 179 *in situ* strata temperature measurements from 15 operational collieries in England and Wales (HMSO 1871). Between 1867 and 1881 the Underground Temperature Committee, funded by the Department of Scientific and Industrial Research, undertook 23 *in situ* bedrock temperature measurements from 10 operational collieries in England (Everett 1870a, b, 1871, 1872, 1873, 1877, 1879, 1880, 1881, 1882a, b; Lebour 1881). Separately, Prestwich (1887) reported strata temperatures from British coal mines; however, it is likely that some data from previous studies had been summarized in this report. During the late 19th and early 20th centuries, as coal mines became deeper, more evidence was required on the variability and controls of heat in mines and the impact on miners. Between 1910 and 1925 the Committee for the control of atmospheric conditions in hot and deep mines was formed. In total, 201 *in situ* strata temperature measurements at 45 operational collieries in England, Scotland and Wales were reported (Anon 1919–20; Rees 1920–21; Graham 1921–22; Jones 1924, 1926).

Mine Water Blocks and depth to workings

For each MWB the shallowest and deepest recorded mine workings were calculated and rounded to the nearest 100 m, to provide a minimum and maximum worked depth within each MWB. The maximum worked depth for each MWB is used to create a lower boundary for the mapping. However, it should be noted that the maximum depths do not mean that workings occur continually across the MWB at this depth.

Method for calculating temperatures

For the mapping exercise it was necessary to distinguish between temperatures that we believed to be more representative of wider equilibrium conditions across the MWB and localized temperature gradients measured at actively pumped boreholes and shafts.

Equilibrium temperatures are measured in unpumped monitoring boreholes in both recovered and recovering coalfields, hydrocarbon exploration wells and historical coal strata measurements made in active collieries. Equilibrium temperatures are considered to be a

reasonable reflection of the temperature of the coalfield. Equilibrium temperatures were recorded in all three datasets.

Pumped temperatures are measured only in actively pumped boreholes and shafts, used mostly for the purpose of mine water management and pollution prevention. Pumped temperatures were only recorded in the Coal Authority temperature log dataset. The measured temperatures, often elevated compared with equilibrium temperatures, were considered to reflect localized changes owing to pumping.

A few MWB are data rich, allowing an average and range of equilibrium temperatures to be calculated at 100 m depth intervals. For other MWB there were only a few UKGC and coal strata temperature data, which were combined with the mean surface annual air temperature to calculate a geothermal gradient from which 'equilibrium' temperatures at 100 m intervals were predicted. Mean annual air temperatures (from MetOffice HadUK-Grid District data 1980–2019) were assigned at a depth of 15 m below ground to each coalfield area to improve the calculation of the geothermal gradient. For 'equilibrium' temperatures, where individual MWB have no data but there were data for other MWB within the same coalfield an average value from the entire coalfield was applied to the MWB with no data. It was not possible to assign temperature values where there were no data for an entire coalfield; for example, Shropshire and the Forest of Dean.

Mine water temperature maps

A series of maps have been drawn to illustrate temperatures in 100 m depth intervals across British coalfields, with maps produced for depths between 100 and 1000 m. The Coal Authority's 174 MWB (Fig. 2) have been used as boundaries and have been populated with attributes. Of the 174 MWB, 79 have measured mine water or strata temperature data and 82 were assigned average temperatures from adjacent MWB within the same coalfield. Thirteen MWB have no temperature data and no adjacent blocks within the coalfield from which to apply average values and thus remain unknown. Each MWB was assigned temperature data at 100 m intervals based upon the depths of known mine workings (Table 1). Mapped coal mine workings in British coalfields occur from the surface to 1785 mbgl (metres below ground level) and measured temperature data were available to a maximum depth of 1300 mbgl, although we show maps only to 1000 m depth. Using a geographical information system (GIS) each MWB polygon was assigned its associated attributes (Table 1). Maps of 'equilibrium' temperatures from 100 to 1000 m and pumped temperatures at 100 and 200 m are generated from the data.

Results

First, comparisons between historical *in situ* strata temperatures and modern borehole data (BGS UKGC) are discussed (Fig. 3), followed by summary of all equilibrium data at a national scale

with 100 m increments of depth (Table 2), and finally the temperature data are summarized for each British coalfield (Table 3). Two examples of the impacts of pumping, from a 'pumped coalfield' are provided from active pumping schemes (Fig. 4a and b). The data are presented in a series of maps covering the main British coalfields (Figs 5–8).

Comparison of BGS UKGC and historical *in situ* strata temperature data

Data from the BGS UKGC and historical *in situ* strata measurements (1848–1924) are compared in Figure 3. The historical strata temperature data were measured in operational coal mines and thus the depth of measurements is limited by the depth of the coal mining activity. The BGS UKGC data are derived from measurements in boreholes, which can be drilled to depths greater than the active coal workings and also in areas of unworked coal measures. Broadly, there is a good correlation of mean temperatures derived from the older *in situ* strata measurements from dry operational mines and the more recent BGS UKGC data measured from boreholes and shafts, with both datasets displaying the same general trend of increasing temperatures with depth. This broad correlation between the two datasets implies that the post-closure flooded temperature of coal mine workings has reached an approximate temperature equilibrium with the surrounding strata.


The historical *in situ* strata temperature data (Fig. 3) report that between 1000 and 1200 mbgl the mean temperature of the mined Coal Measured strata is 37.8°C. This correlates very well with the BGS UKGC data (38.2°C) at the same depth range, and the predicted mean temperature at a UK scale of 37°C at 1 km depth (Busby *et al.* 2011). Minimum measured temperatures were 9.7°C (between 100 and 200 mbgl) and 9.0°C (between 0 and 100 mbgl) for the BGS UKGC data and *in situ* strata data respectively. Maximum reported temperatures were 57.8°C (between 1600 and 1700 mbgl) and 40.8°C (between 1100 and 1200 mbgl) for the BGS UKGC data and *in situ* strata data respectively. Temperature variations within each 100 m depth slice are generally greater in the BGS UKGC data (with a maximum range of 32.8°C) and smaller in the historical strata temperature data (with a maximum of 13.9°C).

One explanation for the larger range in temperatures observed in the BGS UKGC data is that this dataset comprises measurements from both mined and unmined sections of coalfield. However, it is also possible that some of the data in the BGS UKGC had not reached thermal equilibrium at the time of measurement. Despite this the broad similarity in mean values between the BGS UKGC data and the older *in situ* strata temperature data suggests that the older *in situ* data could, with caution, be used to predict mean post-closure modern flooded temperatures in coal mines. This could be especially useful where older strata temperature data exist but where there are no existing boreholes or shafts to measure modern-day temperatures within a coalfield.

Table 1. Example of attributes used to create mine water temperature maps

Attribute field	Example
Mine Water Block name	Nottingham South
Coalfield	Nottinghamshire
Measured temperature data	Yes
Minimum depth of recorded workings (mbgl)	0
Maximum depth of recording workings (mbgl)	746
100 m depth*	Average (mean) temperature (°C)
	Maximum temperature (°C)
	Minimum temperature (°C)
	11.9
	12.3
	11.6

*Average, maximum and minimum values are entered every 100 m until the maximum depth of recorded working (rounded to the nearest 100 mbgl).

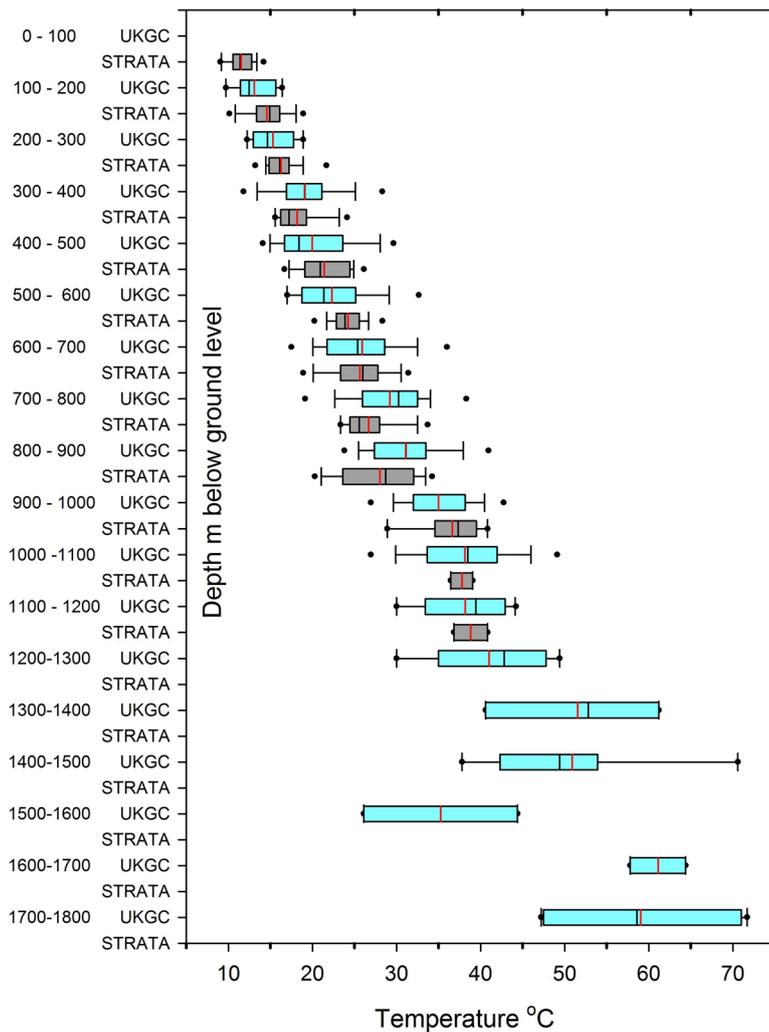

Depth mbgl	Source	n	Max T°C	Min T°C	Mean T°C	SD	Range T°C
0 - 100	UKGC	0	n.a	n.a	n.a	n.a	n.a
	STRATA	28	14.4	9	11.5	1.5	5.4
100 - 200	UKGC	6	16.4	9.7	13.1	2.2	6.7
	STRATA	39	18.9	5.6	14.6	2.6	13.3
200 - 300	UKGC	10	18.9	12.2	15.3	2.5	6.7
	STRATA	29	23.3	12.2	16.2	2.1	11.1
300 - 400	UKGC	19	28.3	11.8	19.1	3.8	16.5
	STRATA	72	25.6	14.7	18.2	2.7	10.8
400 - 500	UKGC	23	29.7	14.0	20.0	4.3	15.7
	STRATA	91	27.2	16.4	21.4	2.8	10.8
500 - 600	UKGC	26	34.4	17.0	22.3	4.5	17.4
	STRATA	53	28.3	19.4	24.2	2.1	8.9
600 - 700	UKGC	44	44.4	15.0	25.9	5.4	29.4
	STRATA	78	32.5	18.6	25.7	3.6	13.9
700 - 800	UKGC	28	41.5	18.0	29.2	4.8	23.5
	STRATA	66	34.4	22.9	26.7	3.2	11.5
800 - 900	UKGC	45	41.7	21.4	31.1	4.7	20.3
	STRATA	16	34.2	20.3	28	4.5	13.9
900 - 1000	UKGC	41	43.3	26.7	35.0	4.0	16.6
	STRATA	1	28.9	28.9	28.9	n.a	n.a
1000 - 1100	UKGC	24	50.0	26.0	38.1	5.8	24.0
	STRATA	3	39.1	36.4	37.8	1.3	2.6
1100 - 1200	UKGC	14	44.2	30.0	38.2	5.0	14.2
	STRATA	2	40.8	36.8	38.8	2.8	4
1200-1300	UKGC	7	49.4	30.0	41.0	6.4	19.4
	STRATA	0	n.a	n.a	n.a	n.a	n.a
1300-1400	UKGC	3	61.2	40.6	51.5	8.5	20.6
	STRATA	0	n.a	n.a	n.a	n.a	n.a
1400-1500	UKGC	7	70.6	37.8	50.9	9.7	32.8
	STRATA	0	n.a	n.a	n.a	n.a	n.a
1500-1600	UKGC	2	44.4	26.1	35.3	9.1	18.3
	STRATA	0	n.a	n.a	n.a	n.a	n.a
1600-1700	UKGC	2	64.4	57.8	61.1	3.3	6.7
	STRATA	0	n.a	n.a	n.a	n.a	n.a
1700-1800	UKGC	4	71.7	47.2	59.0	11.3	24.5
	STRATA	0	n.a	n.a	n.a	n.a	n.a

Fig. 3. Box plot of BGS UKGC (blue) and historical *in situ* coal strata temperature (grey) from coalfields in equilibrium (does not include pumped data). BGS UKGC (blue) borehole temperature data from the BGS UKGC from all coalfields plus a 500 m radius. Data © BGS, UKRI. 'STRATA' are historical *in situ* strata temperatures (grey) from operational British coalfields (1866–1924). In box plot, box is upper and lower quartile; whiskers are maximum and minimum, red line is mean, black line is median, outlier dots are 95th and 5th percentiles. Data from Everett (1870a, b, 1871, 1872, 1873, 1877, 1879, 1880, 1881, 1882a), HMSO (1871), Prestwich (1887), Anon. (1919–20), Davies (1919–20), Rees (1920–21), Graham (1921–22) and Jones (1924, 1926).

Temperatures in equilibrium British coalfields at 100 m depth intervals

Initially, all the coalfield data were collated and presented in 100 m depth intervals, from 100 to 1200 mbgl, across all of the coalfields in Britain (Table 2), combining data from the Coal Authority downhole temperature profiles, BGS UKGC and historical *in situ* strata temperatures. The minimum temperature is 9.5°C (100 mbgl) and the maximum temperature is 52.8°C (1100 mbgl). Using a mean annual UK air temperature of 9°C, calculated geothermal gradients at each 100 m depth interval (from 100 to 1100 m) produce relatively similar gradients varying only slightly from 23.2 to 26.9°C km⁻¹. Despite the similarity of the mean geothermal gradients at each 100 m interval there can also be significant differences between the maximum and minimum measured temperatures at the same depth, which can be as much as 29.4°C km⁻¹ (at 1100 mbgl). Most boreholes for heat recovery, cooling and storage schemes will not be drilled to such depths, because of increasing cost and risk, although access to deeper mine water may be possible via existing shafts. Even at relatively shallow depths, where drilling is most likely to occur, significant differences between the maximum and minimum measured temperatures are also reported in Britain's coalfields (e.g. 11.7°C (100 mbgl),

14.2°C (200 mbgl) and 10.8°C (300 mbgl)) and thus a more refined analysis by coalfield is required.

Geothermal gradients of the British coalfields

To better understand the variability of temperature at each 100 m depth interval the data have been ranked by mean geothermal gradient for each of the British coalfields (Table 3). It was not possible to rank the North Wales or Leicestershire coalfields as they both had only one data point; Forest of Dean and Shropshire coalfields have no data and were not included in the ranking. The data were sorted using the mean geothermal gradients for the entire coalfield at all depths. Using this approach the median geothermal gradient is calculated at 24.1°C km⁻¹ for all of the British coalfields. The coalfields with the highest mean geothermal gradients include the North East (34.4°C km⁻¹), Cumbria (32.5°C km⁻¹) and Yorkshire (32.3°C km⁻¹). The lowest mean geothermal gradients are reported from Warwickshire (17.3°C km⁻¹), South Wales (19.5°C km⁻¹), Fife (21.9°C km⁻¹), Douglas (22.2°C km⁻¹) and Staffordshire (22.5°C km⁻¹). A series of maps (Fig. 5–8) have been drawn to illustrate the spatial and lateral variability of average equilibrium temperatures from between 100 and 1000 mbgl and pumped temperatures at 100 and 200 mbgl across the British coalfields.

Table 2. Summary of coal mine temperatures from Mine Water Blocks at 100 m depth intervals across the British coalfields

Depth (mbgl)	<i>n</i>	Minimum <i>T</i> (°C)	Maximum <i>T</i> (°C)	Range <i>T</i> (°C)	Mean <i>T</i> (°C)	Median <i>T</i> (°C)	Mean geothermal gradient (°C km ⁻¹)*
100	76	9.5	15.6	6.1	11.7	11.6	26.6
<i>100</i>	<i>20</i>	<i>9.2</i>	<i>19.8</i>	<i>10.6</i>	<i>13.3</i>	<i>13.3</i>	
200	76	10.7	17.8	7.0	14.2	14.3	25.9
<i>200</i>	<i>16</i>	<i>11.8</i>	<i>21.5</i>	<i>9.7</i>	<i>15.1</i>	<i>15.1</i>	
300	69	12.9	23.7	10.8	16.7	17.0	25.6
<i>300</i>	<i>10</i>	<i>13.4</i>	<i>23.0</i>	<i>9.6</i>	<i>16.6</i>	<i>16.6</i>	
400	70	14.2	25.6	11.4	19.2	19.4	25.4
<i>400</i>	<i>7</i>	<i>13.7</i>	<i>21.8</i>	<i>8.1</i>	<i>16.8</i>	<i>16.8</i>	
500	66	15.5	29.6	14.1	21.8	22.3	25.5
<i>500</i>	<i>5</i>	<i>14.1</i>	<i>23.3</i>	<i>9.2</i>	<i>17.7</i>	<i>17.7</i>	
600	53	16.8	33.6	16.8	23.7	24.4	24.5
700	51	18.1	37.6	19.5	26.2	27.0	24.6
800	44	19.5	41.6	22.2	28.2	27.9	24.0
900	34	20.8	45.6	24.9	30.8	30.1	24.2
1000	27	22.1	49.6	27.5	33.4	35.8	24.4
1100	9	23.4	52.8	29.4	37.4	34.6	25.8
1200	2	32.8	40.9	8.1	36.9	36.9	23.2

Equilibrium temperatures are in normal font; data from pumped mine water bodies are in italics. Data compiled from a combination of downhole temperature profiles, bottom hole temperatures and historical strata temperatures. Data © Copyright the Coal Authority all rights reserved; © British Geological Survey, UKRI. Geothermal gradients not calculated for disturbed data.

n, number of Mine Water Blocks with measured data; it should be noted that some MWB can have both equilibrium and pumped data.

*Calculated using 9 °C as average UK surface temperature and mean temperature.

Effect of pumping on mine water temperature in a shaft

Although the majority of data discussed represent equilibrium temperatures of mine water or coal strata, the localized effect of pumping (or where mine water rebound forces water vertically up disused shafts to the surface) can significantly alter the locally calculated geothermal gradient.

Two examples are provided from pumping shafts at Dawdon and Horden collieries in the North East Coalfield where pumps are

installed at 100 mbgl. Prior to commencement of pumping, in 2010 at Dawdon Theresa Shaft [443580, 547810] (Fig. 4a), four temperature profiles were measured between 2000 and 2008, which were broadly similar. However, after a period of pumping, which commenced in 2010 at *c.* 100 l s⁻¹, the measured temperature profile within the shaft significantly increased, possibly as deeper water is drawn into and mixes with or replaces cooler water in the shaft. A similar pattern is observed at Horden South Shaft [444225, 541858] (Fig. 4b), where pumping commenced in 2004 at *c.* 40 l s⁻¹. Despite there only being

Table 3. Britain's coalfields ranked by order of their average geothermal gradient at 100 m depth intervals (does not include pumped data)

	Mean air <i>T</i> (°C) 1980– 2019	MWB total	MWB with data	Depth below ground level (m)	100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	Mean geothermal gradient (°C km)
North East	9.0	29	9	31.9	32.1	35.7	35.7	36.1										34.3
Cumbria	9.0	9	3	32.7	32.5	32.4	32.4	32.4										32.5
Yorkshire	9.0	10	5	32.9	31.9	31.3	30.6	31.7	31.6	32.4	32.4	32.3	32.1	36.4				32.3
Central Scotland	8.1	2	2	35.0	30.0	28.0	28.2	27.9	27.6	29.1	29.0	29.0	29.6	34.5				29.8
Nottinghamshire	9.6	18	10	24.8	27.7	28.5	28.9	29.1	29.3	29.4	29.2	29.2						28.5
Ayrshire	7.4	5	1	27.0	26.5													26.8
Kent	10.4	4	3			25.2	25.4	25.6	24.6	26.4	26.4	26.5	26.5					25.8
Lothian	7.4	1	1	40.0	25.0	24.0	22.9	22.3	21.9	21.7	21.4	21.3	21.1					24.2
Lancashire	9.0	18	7	30.1	26.7	25.6	25.0	24.7	23.8	23.6	23.5	21.8	22.9	21.6	23.2	19.8		24.0
Bristol and Somerset	9.9	8	3	20.7	23.5	24.4	25.0	25.2	25.5	25.6	22.9	23.0						24.0
South Derbyshire	9.6	2	2	23.0	24.3													23.6
Staffordshire	9.6	11	8	17.1	19.3	20.1	21.6	22.8	23.0	23.1	23.1	23.2	23.3	30.5				22.5
Douglas	8.1	1	1	23.0	22.5	22.3	22.2	22.1	22.0	22.0	22.0	21.9	21.9					22.2
Fife	7.4	3	3	28.3	24.2	23.1	21.1	20.5	20.2	19.9	19.8	19.6	21.8					21.9
South Wales	9.9	22	17	13.5	17.6	19.0	19.3	20.2	20.5	20.7	20.9	22.3	18.4	22.5				19.5
Warwickshire	9.6	15	2	16.5	17.0	17.3	17.4	17.5	17.5	17.5	17.5	17.4						17.3
Median geothermal gradient of British coalfields																		24.1

The following coalfields are not included as they have ≤1 data point: North Wales, Leicestershire, Forest of Dean and Shropshire. Data compiled from a combination of downhole temperature profiles, bottom hole temperatures and historical strata temperatures. Data © Copyright the Coal Authority; © British Geological Survey, UKRI.

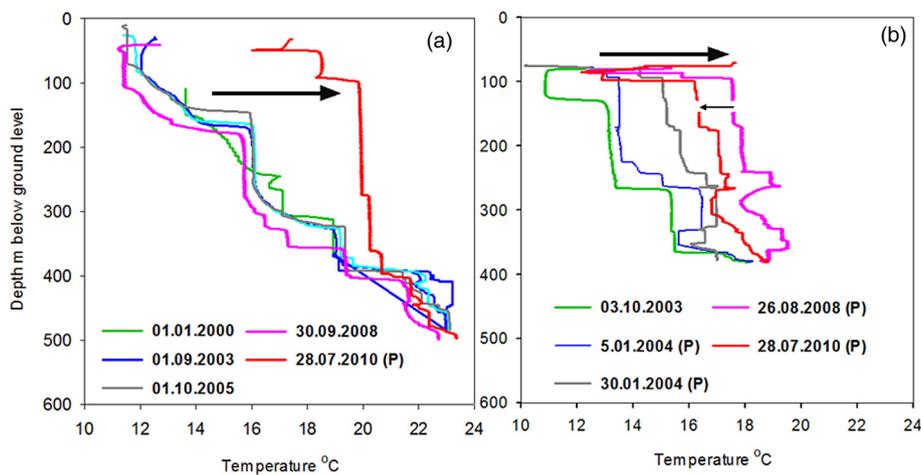


Fig. 4. (a) Down-shaft temperature profiles measured at 'Dawdon Theresa Shaft' North East England where pumping (P) started in 2010 at 100 l s^{-1} ; (b) Down-shaft temperature profiles measured at 'Horden South Shaft' where pumping (P) started in 2004 at 40 l s^{-1} , was increased to $c. 120 \text{ l s}^{-1}$ in 2008, and after 2008 returned to $c. 40 \text{ l s}^{-1}$. At both sites the pump inlet depth was $c. 100 \text{ m}$ bgl. Black arrows indicate general trends of increasing temperature. Data copyright Coal Authority (2020) all rights reserved.

one pre-pumping temperature profile in 2003, the data show an overall increase of water temperature along the length of the shaft. There is some fluctuation in the post-pumping measurements at Horden South Shaft (Fig. 4b) and this could be related to variations in the pumping rate, which was increased to $c. 120 \text{ l s}^{-1}$ up to 2008, and after 2008 returned to $c. 40 \text{ l s}^{-1}$.

Although an increase in temperature may be perceived as a benefit, it can also be coupled with mine water with less favourable chemistry, which could create challenges for the infrastructure of heating and cooling schemes. The effects of pumping at Dawdon resulted in an increase of electrical conductivity, measured at the pump depth of 100 m below ground, from $10\,296 \mu\text{S cm}^{-1}$ (pre-pumping 1 September 2003) to $58\,630 \mu\text{S cm}^{-1}$ (during pumping 28 July 2010). Electrical conductivity also increased at Horden from $1169 \mu\text{S cm}^{-1}$ (pre-pumping 31 October 2003) to $18\,069 \mu\text{S cm}^{-1}$ (during pumping 28 July 2010).

Data from pumped shafts and boreholes (Table 2) were compared with equilibrium temperatures to a depth of 500 m. The pumped data show that a higher mean temperature and geothermal gradient is measured at 100 and 200 m depth intervals; however, the deeper data between 300 and 500 m in pumped coalfields show a lower temperature than for the equilibrium coalfields. The mechanism for this is not fully understood and could simply be a factor of the number of data points available for analysis, which is significantly less in pumped coalfields.

It is not yet clear if these observed warming effects are experienced in all pumping scenarios, and it is likely that it is driven by the temperature and/or depth of the most productive workings that are intercepted. It is possible that in some settings cooler shallower groundwater could be induced into the shaft or borehole during pumping, producing lower temperatures under pumping regimes. There is no evidence to indicate if these effects are localized (i.e. within the shaft or borehole) or if temperature changes are experienced within the wider hydraulically connected parts of the Mine Water Block (e.g. within the cone of influence of the shaft or borehole). During the quality assessment and mapping process measured temperatures from the MWB that were considered to be pumped (e.g. pumping and/or actively rising mine water systems) were separated from those that were considered to be in thermal equilibrium. The reason for this decision was to avoid 'hot spots' created by possibly localized effects of pumping in shafts and boreholes as described above and illustrated in Figure 4a and b. In locations where warmer mine water is already at surface (e.g. pumped or by gravity), there is an exciting potential opportunity to harness this heat energy without significant additional drilling or pumping costs.

Discussion

A national monitoring network for mine water temperature?

The authors acknowledge that the data used in this study, although being the best available evidence, have been compiled from a range of sources, using varying methods and from both operational mines (*in situ* strata temperatures) and post-closure flooded mines. The dataset spans a period of 170 years (1848–2018). There are also many geographical gaps in the data coverage, with nearly half of the Mine Water Blocks having no temperature data or being assigned an average value from a surrounding coalfield. If we are to sustainably licence, regulate and model the impacts of heat recovery and storage in abandoned coal mines then systematic monitoring and mapping, utilizing the existing Coal Authority infrastructure, could be undertaken to better characterize and measure the temperature of British coalfields both spatially and over time. The BGS UKGC is an ideal place in which new data could be stored, and monitoring locations should be identified and instrumented with permanent sensors to quantify temperature change over time. Monitoring near-operational heat recovery and storage systems would also provide information on wider impacts of these systems against an established baseline. Permits to investigate heat from coalfields should also have the requirement that temperature data and borehole logs be submitted and added to the BGS borehole and BGS UKGC database.

Pumped v. equilibrium temperatures

The equilibrium temperatures demonstrate that shallow mine water temperatures are broadly in agreement with predicted geothermal gradients for the UK. It has also been demonstrated that geothermal gradients vary between coalfields, with higher geothermal gradients in the North East, Cumbria and Yorkshire. Abstraction of mine waters in warmer coalfields could potentially result in higher temperature water occurring at shallow depths within pumped shafts and boreholes; however, this is likely to be a localized effect. Each colliery or connected colliery network is likely to be different and it cannot be assumed that pumping will always result in increased near-surface mine water temperature. However, for a large abstraction, as may be the case for a district heating network, the possibility of higher groundwater temperatures occurring at shallower depths following pumping should be considered in the planning phase, as it may result in greater ΔT values for the heat pump system. Although the possibility of higher temperature mine

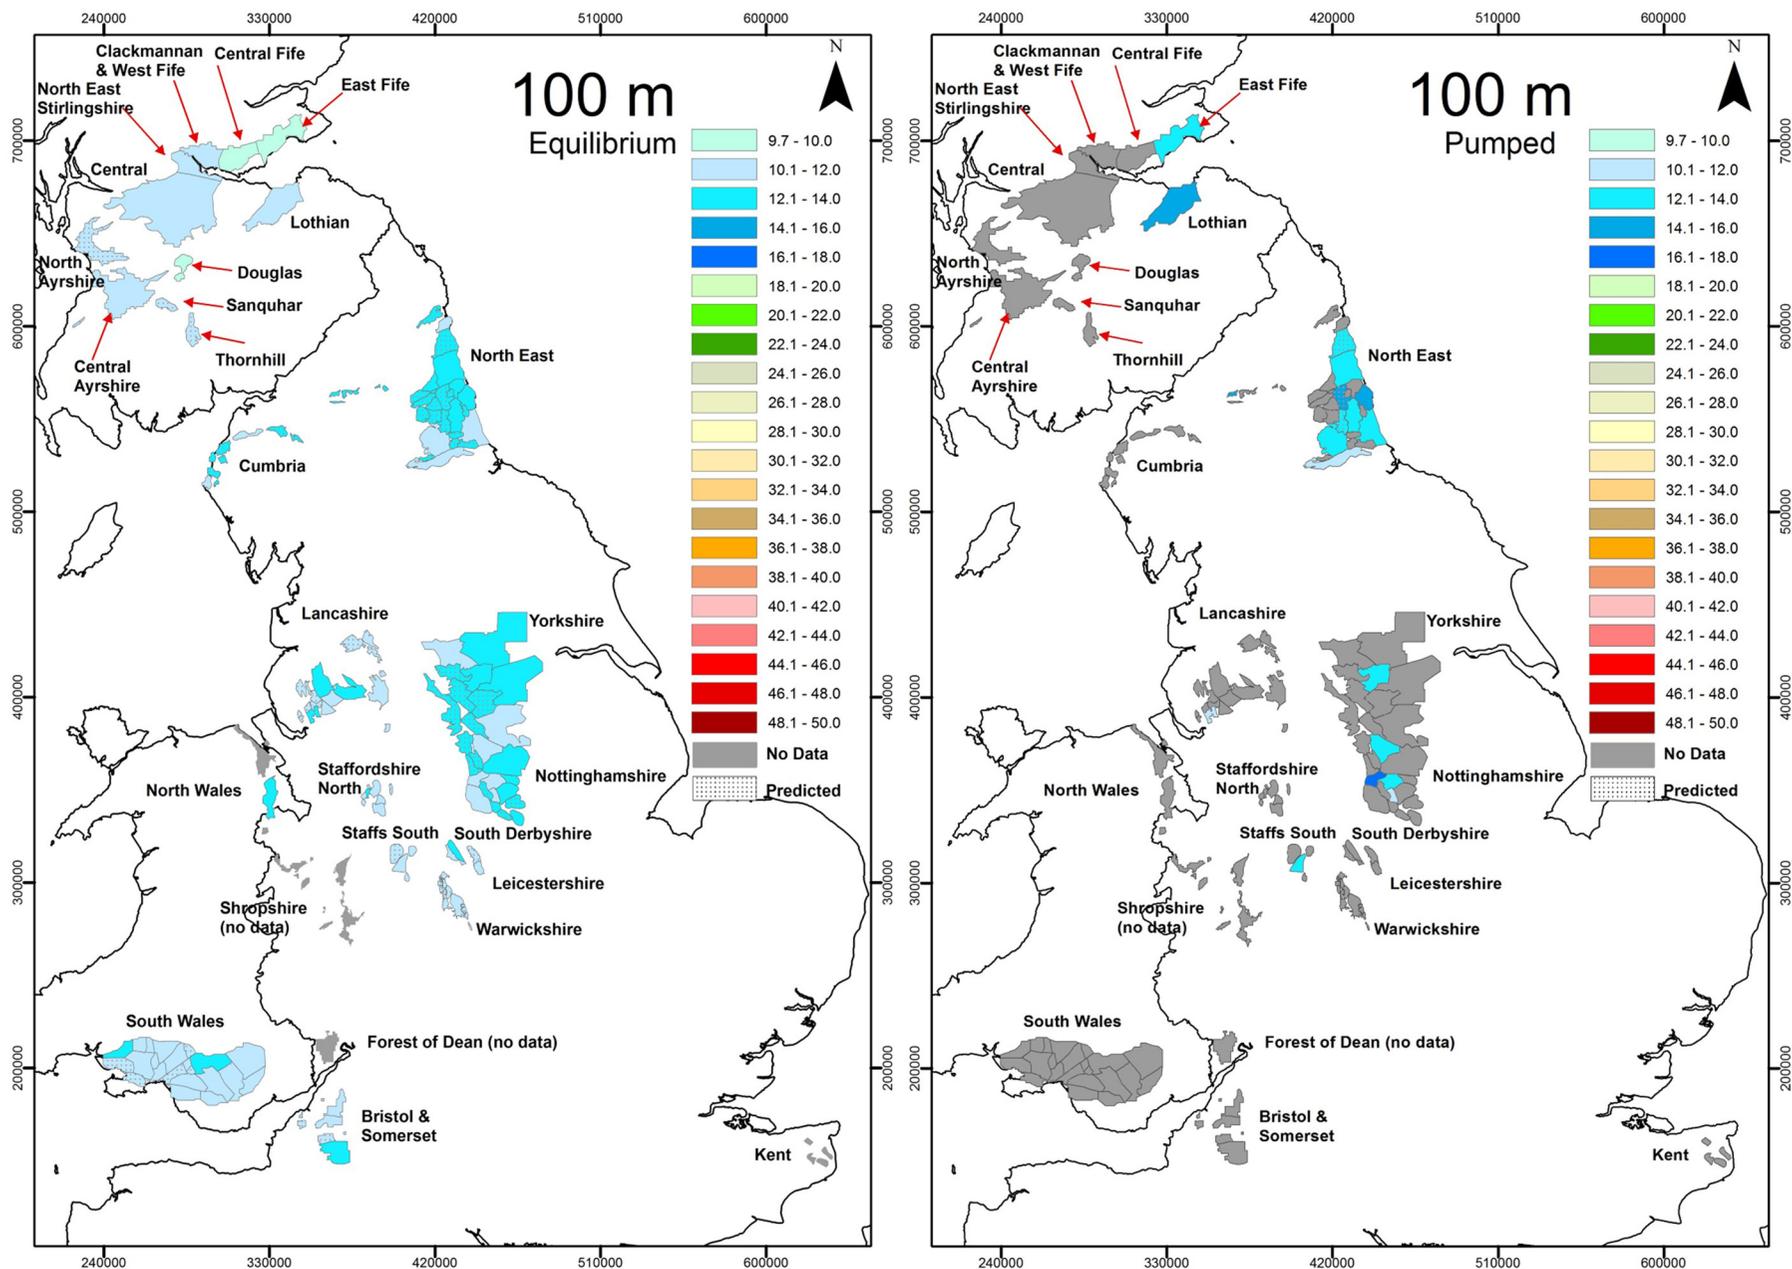


Fig. 5. Average (arithmetic mean) equilibrium and pumped temperatures at 100 m bgl. Dots indicate where MWB temperature has been estimated by applying average values from adjoining Mine Water Blocks within the same coalfield. Contains 1:50 000 BGS DiGMap ©BGS, UKRI and Ordnance Survey data © Crown Copyright and database rights 2020. Contains Mine Water Blocks and data © Copyright Coal Authority (2020) all rights reserved.

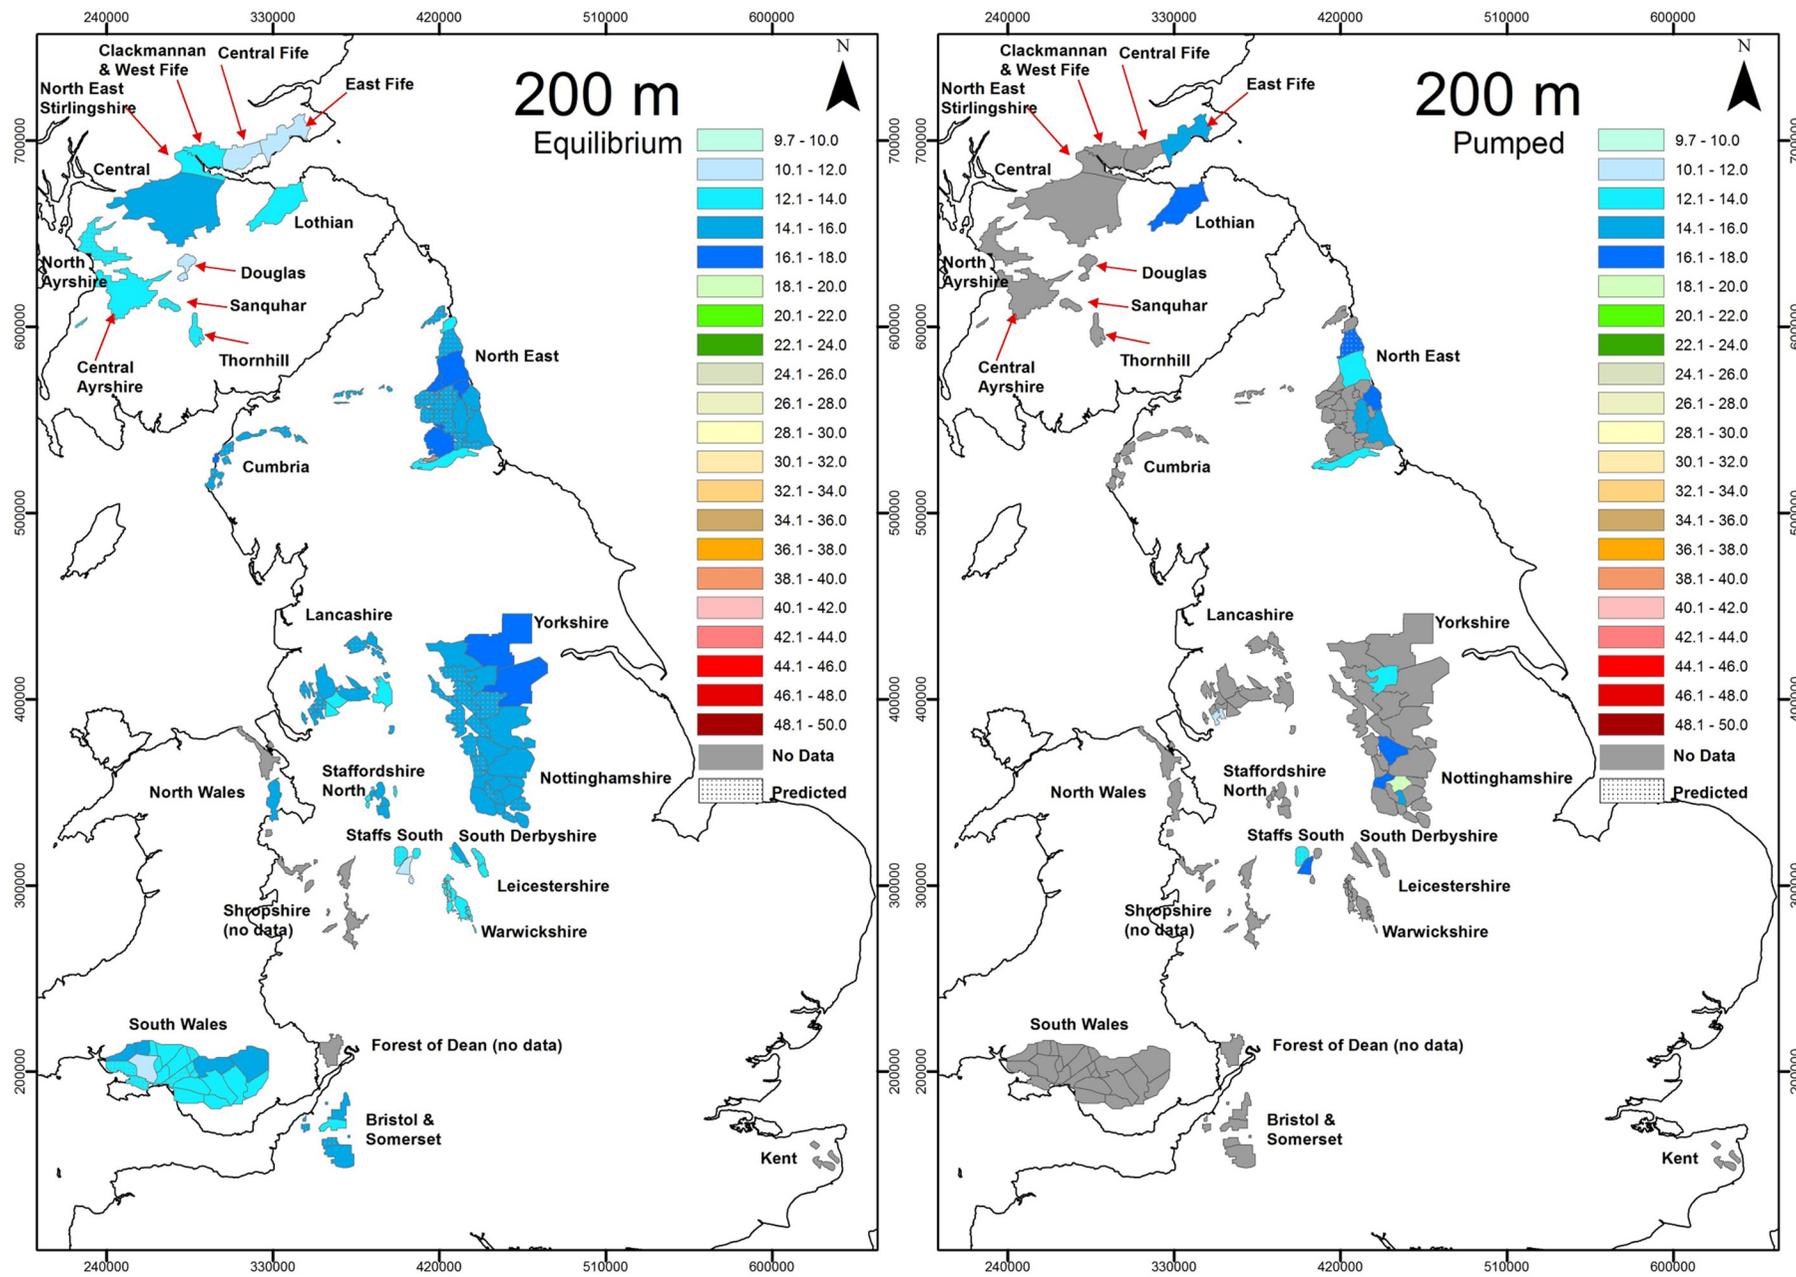


Fig. 6. Average (arithmetic mean) equilibrium and pumped temperatures at 200 mbgl. Dots indicate where MWB temperature has been estimated by applying average values from adjoining Mine Water Blocks in the same coalfield. Contains 1:50 000 BGS DiGMap ©BGS, UKRI and Ordnance Survey data © Crown Copyright and database rights 2020. Contains Mine Water Blocks and data © Copyright Coal Authority (2020) all rights reserved.

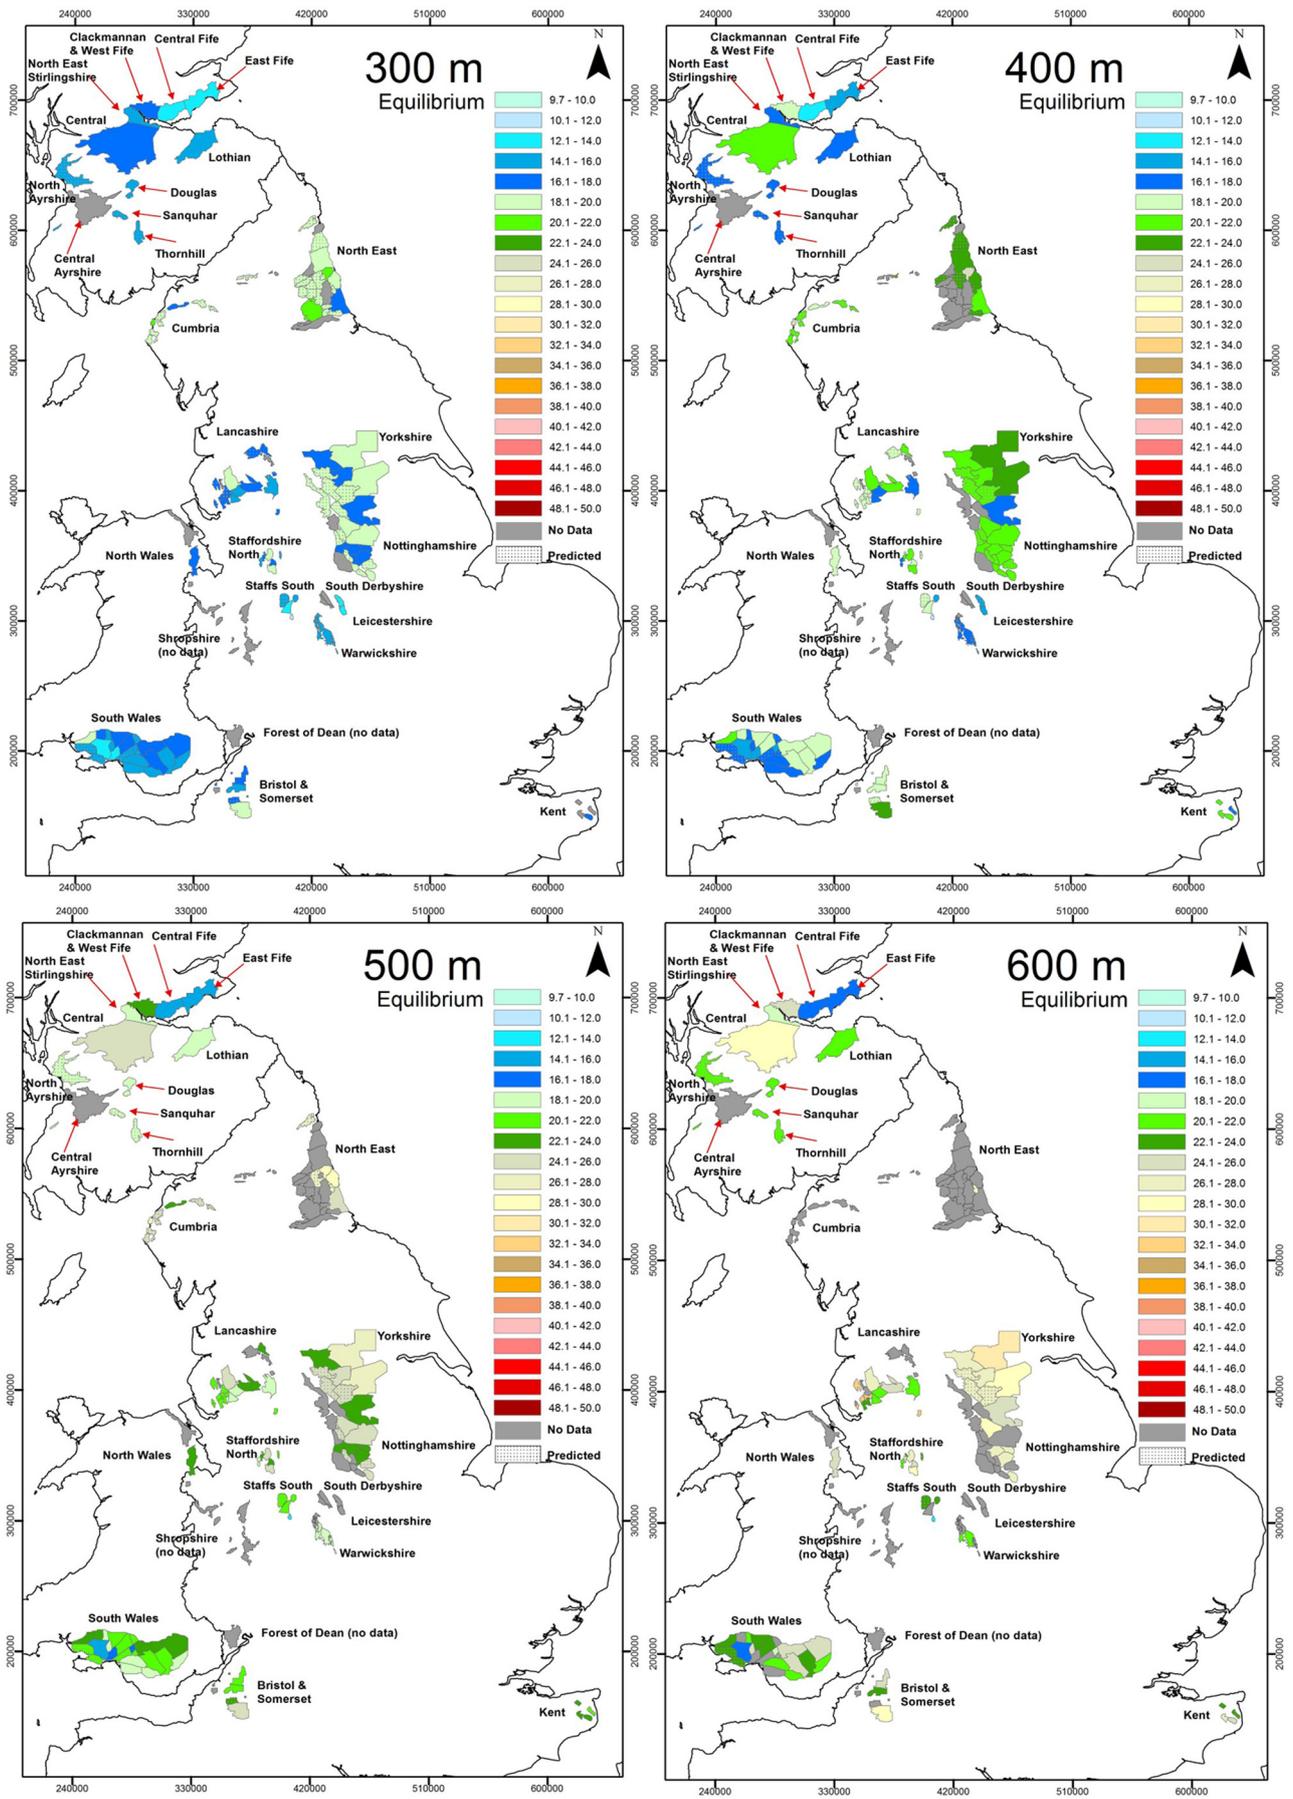


Fig. 7. Average (arithmetic mean) estimated temperature in Mine Water Blocks in equilibrium from 300 to 600 mbgl. Dots indicate where MWB temperature has been estimated by applying average values from adjoining Mine Water Blocks in the same coalfield. Contains 1:50 000 BGS DiGMap ©BGS, UKRI and Ordnance Survey data © Crown Copyright and database rights 2020. Contains Mine Water Blocks and data © Copyright Coal Authority (2020) all rights reserved.

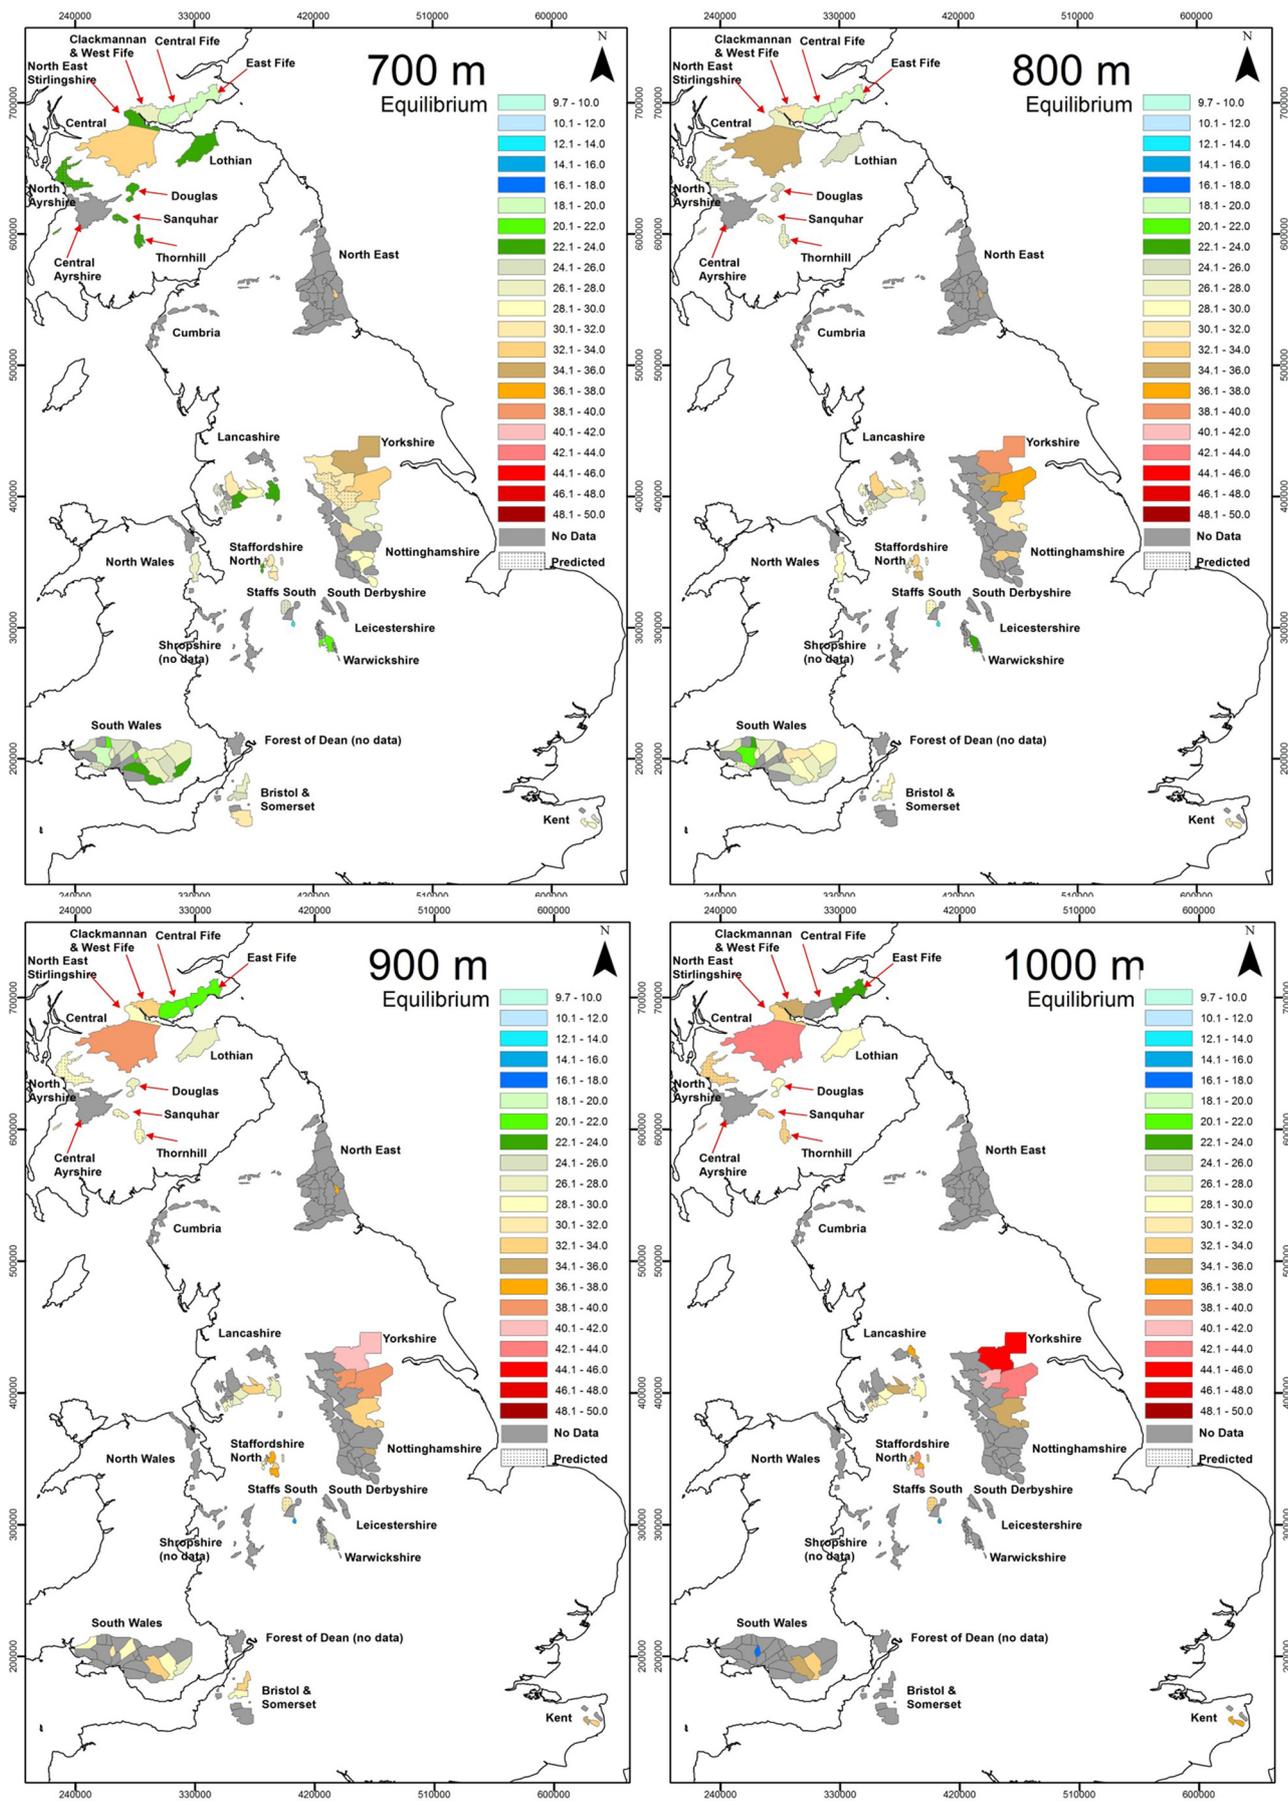


Fig. 8. Average (arithmetic mean) estimated temperature in undisturbed Mine Water Blocks in equilibrium from 700 to 1000 mbgl. Dots indicate where MWB temperature has been estimated by applying average values from adjoining Mine Water Blocks in the same coalfield. Contains 1:50 000 BGS DiGMap ©BGS, UKRI and Ordnance Survey data © Crown Copyright and database rights 2020. Contains Mine Water Blocks and data © Copyright Coal Authority (2020) all rights reserved.

water occurring at shallow depths, owing to the localized effects of pumping, may be perceived as an advantage it could also be coupled with poorer mine water chemistry, which could provide challenges including fouling or corrosion of pipework.

Controls on mine water temperatures

This study illustrates the variability in measured mine water and strata temperatures across the British coalfields and highlights the need for a better understanding of the controls on mine water temperature, especially if we are to sustainably regulate the recovery, cooling and storage of heat. Although the regional geothermal gradients probably exert most influence over mine water temperatures, other potential drivers need to be better understood.

Characterization of the thermal properties of surrounding and overlying strata may help assess if certain types of cover provide a 'thermal blanketing' effect, whereby the thermal properties of the overlying strata help to retain heat in the mine workings. Abstraction can locally increase temperatures (Fig. 4a and b) in shafts but could also potentially induce cooler recharge into the workings, although a cooling effect has not been seen in the data in this study. The effect of mine water pumping and recharge on temperature, especially where multiple schemes occur or are planned, may require hydrogeological modelling of groundwater and heat flow if they are to operate sustainably and without negative feedback loops. Improved hydrogeological and heat flow models may be required that illustrate recharge pathways, temperature and depth of mine waters, type of workings (e.g. pillar and stall or longwall) and fault and fracture networks. Temperatures could be influenced by the residence time of mine water, and indirectly by the permeability of open and collapsed mine workings. Andrews *et al.* (2020) suggested that when pillar and stall mine workings collapse low-permeability clay-rich material and mud can be added to the system, potentially reducing permeability in collapsed workings; this is significant locally when designing mine water heating and cooling schemes but also needs to be considered for future resource assessments at a coalfield or country scale. Energy from exothermic chemical reactions (e.g. oxygen and pyrite) in mine water is considered to be relatively low where oxygen is limited; for example, below the water's surface (Banks *et al.* 2014). However, many mine workings may receive oxygenated water; for example, from reinjection from heating or cooling schemes, or where oxygenated surface water rapidly recharges into mine workings (e.g. via shafts or from losing rivers). Spatiotemporal characterization of bacterial communities in mine water discharges in the South Wales Coalfield suggests that microbiomes are dominated by Fe and S oxidizers (Soares 2019). Quantification of heat generated by these microbiomes is currently unknown and future work should consider how these microbiomes operate under different temperature regimes, especially where heat is removed or stored in coalfields. Potential 'knock-on' effects from heat storage in abandoned mines need to be better understood. For example, what is the impact on microbial communities and chemical reactions under increasing temperature scenarios, and could this result in more clogging or precipitation in either the boreholes or mine workings?

Conclusions

This paper presents the best available dataset on the temperature of Britain's coalfields, despite the data being measured using various methods, in both operational mines and flooded post-closure mines. Analysis of the temperature data shows the following.

- The median geothermal gradient in Britain's equilibrium (not actively pumped) coalfields is calculated at 24.1°C km⁻¹; however, mean geothermal gradients in separate coalfields can vary from 17.3 to 34.3°C km⁻¹.

- The coalfields with the highest mean geothermal gradients include North East, Cumbria and Yorkshire, all of which have mean geothermal gradients generally >30°C km⁻¹, whereas geothermal gradients generally <23°C km⁻¹ are found in Warwickshire, South Wales, Staffordshire, and the Douglas and Fife coalfields in Scotland.
- Comparison of mean temperatures from historical *in situ* strata measurements with modern boreholes and shaft temperatures at similar depths show broad agreement; thus it is possible that older *in situ* strata temperature measurements can be used to estimate post-closure temperatures in coal mines.
- Two examples from active dewatering shafts show that abstraction of mine water can, in some cases, locally influence the measured geothermal gradient in shafts as deeper warmer water is drawn into the shaft, bringing warmer water closer to the surface.

Despite this study using the best available evidence there is significant potential to expand the baseline characterization of mine water temperature in Britain's coalfields, to both better understand and regulate heat recovery, cooling and storage schemes as we move towards a low-carbon economy.

Acknowledgements We thank D. Banks and N. Burnside for their reviews and comments, which have helped to greatly improve this paper. We are grateful to staff at the Coal Authority, including I. Watson, H. Whiteley, C. Adams, K. Deeming and W. Handley, and at the British Geological Survey, including C. Abesser, A. Monaghan, J. Booth, J. Silvestros and C. Woodward. K. Roberts at Natural Resources Wales is thanked for providing access to monitoring boreholes in south Wales. Robertson Geo is thanked for provision of data collected under contract to the Coal Authority. G.F., J.B., D.I.S. and A.H. publish with the permission of the executive director of the British Geological Survey (UKRI).

Author contributions GF: conceptualization (lead), data curation (equal), formal analysis (equal), methodology (equal), project administration (lead), visualization (lead), writing – original draft (lead), writing – review & editing (lead); JB: formal analysis (equal), methodology (equal), validation (equal), writing – original draft (equal), writing – review & editing (equal); LW: conceptualization (supporting), data curation (supporting), methodology (supporting), writing – original draft (supporting), writing – review & editing (supporting); JC: funding acquisition (equal), project administration (equal), supervision (equal), writing – original draft (supporting); DIS: funding acquisition (supporting), supervision (supporting), writing – original draft (supporting), writing – review & editing (equal); AH: funding acquisition (supporting), supervision (equal), writing – original draft (supporting), writing – review & editing (supporting).

Funding Funding for this collaborative project has come from the British Geological Survey (UKRI) science budget and the Coal Authority.

Data availability statement The data that support the findings of this study are available upon request and subsequent licence/legal agreement from both the Coal Authority and the British Geological Survey via the UK Geothermal Catalogue. TCA and BGS reserve the right to charge for data requests.

Scientific editing by Jonathan Smith; David Birks

References

- Abesser, C., Schofield, D.I., Busby, J. and Bonsor, H. 2018. *Who owns (Geothermal) heat?* British Geological Survey Science Briefing Paper, <http://nora.nerc.ac.uk/id/eprint/523369/1/whoOwnsGeothermalHeat.pdf>
- Al-Habaibeh, A., Anthresh, A.P. and Parker, K. 2019. Performance analysis of using mine water from an abandoned coal mine for heating of buildings using an open loop based single shaft GSHP systems. *Applied Energy*, **211**, 393–402, <https://doi.org/10.1016/j.apenergy.2017.11.025>
- Andrews, B.J., Cumberpatch, Z.A., Shipton, Z. and Lord, R. 2020. Collapse processes in abandoned pillar and stall coal mines: implications for shallow mine geothermal energy. *Geothermics*, **88**, 101904 <https://doi.org/10.1016/j.geothermics.2020.101904>

- Anon. 1919–20. First report to the committee on 'The control of atmospheric conditions in hot and deep mines'. *Transactions of the Institution of Mining Engineers*, **LVIII**, 231–256.
- Anthresh, A.P., Al-Habaibeh, A. and Parker, K. 2015. Innovative approach for heating of buildings using water from a flooded coal mine through an open loop based single shaft GSHP system. Clean, efficient and affordable energy for a sustainable future: The 7th International conference on Applied Energy (ICAE2015). *Energy Procedia*, **75**, 1221–1228, <https://doi.org/10.1016/j.egypro.2015.07.162>
- Bailey, M.T., Moorhouse, A.M.L. and Watson, I. 2013. Heat extraction from hypersaline mine water at the Dawdon water treatment site. In: Tibbett, M., Fourie, A.B. and Digby, C. (eds) *Proceedings of the Eighth International Seminar on Mine Closure*, Australian Centre for Geomechanics, Cornwall, 559–570, https://doi.org/10.36487/ACG_rep/1352_47_Bailey
- Bailey, M.T., Gandy, C.J., Watson, I.A., Wyatt, L.M. and Jarvis, A.P. 2016. Heat recovery potential of mine water treatment systems in Great Britain. *International Journal of Coal Geology*, **164**, 77–84, <https://doi.org/10.1016/j.coal.2016.03.007>
- Banks, D. 2012. *An Introduction to Thermogeology: Ground Source Heating and Cooling*. Wiley, Chichester.
- Banks, S.B. and Banks, D. 2001. Abandoned mines drainage: impact assessment and mitigation of discharges from coal mines in the UK. *Engineering Geology*, **60**, 31–37, [https://doi.org/10.1016/S0013-7952\(00\)00086-7](https://doi.org/10.1016/S0013-7952(00)00086-7)
- Banks, D., Skarphagen, H., Wiltshire, R. and Jossop, C. 2004. Heat pumps as a tool for energy recovery from mining wastes. In: Gierie, R. and Stille, P. (eds) *Energy, waste and the Environment: a geochemical perspective*. Geological Society, London, Special Publications, **236**, 499–513, <https://doi.org/10.1144/GSL.SP.2004.236.01.27>
- Banks, D., Fraga Pumar, A. and Watson, I. 2009. The operational performance of Scottish minewater-based ground source heat pump systems. *Quarterly Journal of Engineering Geology and Hydrogeology*, **42**, 347–357, <https://doi.org/10.1144/1470-9236/08-081>
- Banks, D., Skarphagen, H., Wiltshire, R. and Jessop, C. 2014. Heat Pumps as a tool for energy recovery from mining wastes. In: Gierie, R. and Stille, P. (eds) *Energy, waste and the Environment: a geochemical perspective*. Geological Society, London, Special Publications, **236**, 499–513.
- Banks, D., Athresh, A., Al-Habaibeh, A. and Burnside, N. 2017. Water from abandoned mines as a heat source: practice experiences of open- and closed-loop strategies, United Kingdom. *Sustainable Water Resources Management*, **5**, 29–50, <https://doi.org/10.1007/s40899-017-0094-7>
- BEIS. 2017. *The Clean Growth Strategy. Leading the way to a low carbon future*. Department for Business, Energy and Industrial Strategy, HM Government UK, London.
- BEIS. 2018. *Clean Growth – transforming heating. Overview of current Evidence, December 2018*. HM Government UK, London.
- BGS. 1984. *Summary of the geothermal prospects for the United Kingdom: final report of the British Geological Survey's geothermal energy programme 1979–1984*. British Geological Survey, Keyworth.
- BGS. 1985. *Summary of the geothermal prospects for the United Kingdom. Final Report of the BGS Geothermal Energy programme 1979–1984*. British Geological Survey, Keyworth.
- Brabham, P., Manju, Thomas, H.T., Farr, G., Francis, R., Sahid, R. and Sivachidambaram, S. 2019. The potential use of mine water for a district heating scheme at Caerau, Upper Llynfi valley, South Wales, UK. *Quarterly Journal of Engineering Geology and Hydrogeology*, **53**, 145–158, <https://doi.org/10.1144/qjegh2018-213>
- Brown, M.A.E., Robins, N.S., Evans, R.B., Monro, S.K. and Robson, P.G. 1987. *The Upper Devonian and Carboniferous sandstones of the Midland Valley of Scotland. Investigation of the Geothermal Potential of the UK*. British Geological Survey Report, **WJGE/87/003**.
- Burley, A.J., Smith, I.F. *et al.* 1978. Preliminary assessment of the geothermal potential of the United Kingdom. *Advances in European Geothermal Research*, 99–108.
- Burley, A.J. and Gale, I.N. 1981. *Investigation of the geothermal potential of the UK: Catalogue of geothermal data for the land area of the United Kingdom*. First revision, August 1981.
- Burley, A.J. and Gale, I.N. 1982. *Catalogue of geothermal data for the land area of the United Kingdom. 1st Revision*. Institute of Geological Sciences, *Investigation of the Geothermal Potential of the UK, 1982*. British Geological Survey Report, **WJGE/82/1**.
- Burley, A.J., Edmunds, W.M. and Gale, I.N. 1984. *Catalogue of geothermal data for the land area of the United Kingdom. Second Revision April 1984. Investigation of the geothermal potential of the UK*. British Geological Survey, Keyworth.
- Burnside, N.M., Banks, D. and Boyce, A. 2016a. Sustainability of thermal energy production at the flooded mine workings of the former Caphouse Colliery, Yorkshire, United Kingdom. *International Journal of Coal Geology*, **164**, 85–91, <https://doi.org/10.1016/j.coal.2016.03.006>
- Burnside, N.M., Banks, D., Boyce, A.J. and Athresh, A. 2016b. Hydrochemistry and stable isotopes as tools for understanding the sustainability of mine water geothermal energy production from a 'standing column' heat pump system: Markham Colliery, Bolsover, Derbyshire, UK. *International Journal of Coal Geology*, **165**, 223–230, <https://doi.org/10.1016/j.coal.2016.08.021>
- Busby, J. 2014. Geothermal energy in sedimentary basins in the UK. *Hydrogeology Journal*, **22**, 129–141, <https://doi.org/10.1007/s10040-013-1054-4>
- Busby, J., Kingdon, A. and Williams, J. 2011. The measured shallow temperature field in Britain. *Quarterly Journal of Engineering Geology and Hydrogeology*, **44**, 373–387, <https://doi.org/10.1144/1470-9236/10-049>
- CCC. 2019. *Net Zero: The UK's contribution to stopping global warming*. Committee on Climate Change. May 2019, <https://www.theccc.org.uk/wp-content/uploads/2019/05/Net-Zero-The-UKs-contribution-to-stopping-global-warming.pdf>
- Davies, E. 1919–1920. First Report of the Committee on 'The Control of Atmospheric Conditions in Hot and Deep Mines'. *Transactions of the Institution of Mining Engineers*, **LVIII**, 231–256.
- Environment Agency. 2008. Abandoned mines and the water environment. Science project SC030136-41, https://assets.publishing.service.gov.uk/government/uploads/system/uploads/attachment_data/file/291482/LIT_8879_df7d5c.pdf
- Everett, J.D. 1870a. Report of the Committee appointed for the purpose of investigating the rate of increase of underground temperature downwards in various localities of dry land and under water. *Report of the 39th Meeting of the British Association for the Advancement of Science*, 1871, 176–189.
- Everett, J.D. 1870b. Third Report of the Committee appointed for the purpose of investigating the rate of increase of underground temperature downwards in various localities of dry land and under water. *Report of the 40th Meeting of the British Association for the Advancement of Science*, 1871, 29–41, <https://archive.org/details/reportofbritisha71brit/page/n127>
- Everett 1871. Fourth Report of the Committee appointed for the purpose of investigating the rate of increase of underground temperature downwards in various localities of dry land and under water. *Report of the 41st Meeting of the British Association for the Advancement of Science*, 1872, 14–25, <https://archive.org/details/reportofbritisha72brit/page/n129>
- Everett 1872. Fifth Report of the Committee appointed for the purpose of investigating the rate of increase of underground temperature downwards in various localities of dry land and under water. *Report of the 42nd Meeting of the British Association for the Advancement of Science*, 1873, 128–134, <https://archive.org/details/reportofbritisha73brit/page/n233>
- Everett 1873. Sixth Report of the Committee appointed for the purpose of investigating the rate of increase of underground temperature downwards in various localities of dry land and under water. *Report of the 43rd Meeting of the British Association for the Advancement of Science*, 1874, 252–256, <https://archive.org/details/reportofbritisha74brit/page/n357>
- Everett 1877. Tenth Report of the Committee appointed for the purpose of investigating the rate of increase of underground temperature downwards in various localities of dry land and under water. *Report of the 47th Meeting of the British Association for the Advancement of Science*, 1888, 194–199, <https://archive.org/details/reportofbritisha78brit/page/n301>
- Everett 1879. Twelfth Report of the Committee appointed for the purpose of investigating the rate of increase of underground temperature downwards in various localities of dry land and under water. *Report of the 50th Meeting of the British Association for the Advancement of Science*, 1880, 40–46, <https://archive.org/details/reportofbritisha80brit/page/n115>
- Everett 1880. Thirteenth Report of the Committee appointed for the purpose of investigating the rate of increase of underground temperature downwards in various localities of dry land and under water. *Report of the 50th Meeting of the British Association for the Advancement of Science*, 1881, 26–30, <https://archive.org/details/reportofbritisha80brit/page/n115>
- Everett 1881. Fourteenth Report of the Committee appointed for the purpose of investigating the rate of increase of underground temperature downwards in various localities of dry land and under water. *Report of the 51st Meeting of the British Association for the Advancement of Science*, 1882, 90–92, <https://archive.org/details/reportofbritisha82brit/page/n177>
- Everett 1882a. Fifteenth Report of the Committee appointed for the purpose of investigating the rate of increase of underground temperature downwards in various localities of dry land and under water. *Report of the 52st Meeting of the British Association for the Advancement of Science*, 1883, 72–74, <https://archive.org/details/reportofbritisha83brit/page/n155>
- Everett 1882b. Summary of the results contained in the First Fifteen Reports of the Underground Temperature Committee. *Report of the 52nd Meeting of the British Association for the Advancement of Science*, 1883, 74–90, <https://archive.org/details/reportofbritisha83brit/page/n157>
- Farr, G., Sadasivam, S., Manju, Watson, I.A., Thomas, H.R. and Tucker, D. 2016. Low enthalpy heat recovery from coal mine discharges in the South Wales Coalfield. *International Journal of Coal Geology*, **164**, 92–103, <https://doi.org/10.1016/j.coal.2016.05.008>
- Gillespie, M.R., Crane, E.J. and Barron, H.F. 2013. *Deep geothermal energy potential in Scotland*. British Geological Survey Commissioned Report, **CR/12/131**.
- Graham, J.I. 1921–22. Rock temperatures in the coal-measures of Great Britain (Fourth report to the committee on "The control of atmospheric conditions in hot and deep mines"). *Transactions of the Institution of Mining Engineers*, **LXII**, 343–399.
- Hall, A., Scott, J.A. and Shang, H. 2011. Geothermal energy recovery from underground mines. *Renewable & Sustainable Energy Reviews*, **15**, 916–924, <https://doi.org/10.1016/j.rser.2010.11.007>

- Hammeijer, J., Schlicke, A. *et al.* 2017. Fortissat mine water geothermal district heating project: case study. *Engineering & Technology Reference*, 1–8, <https://doi.org/10.1049/etr.2016.0087>
- HMSO. 1871. *Report of the Commissioners Appointed to Inquire into the several Matters Relating to Coal in the United Kingdom, Vol. 1*. HMSO, London.
- Holliday, D.W. 1986. Devonian and Carboniferous Basins. In: Downing, R.A. and Gray, D.A. (eds) *Geothermal Energy – the Potential in the United Kingdom*. HMSO for British Geological Survey, London, 84–109.
- Jones, T.D. 1924. The strata temperatures of the south Wales and Pembrokeshire coalfields. *Proceedings of the South Wales Institute of Engineers*, **39**, 559–579.
- Jones, T.D. 1926. Further investigation of strata temperature in the south Wales coalfields. *Proceedings of the South Wales Institute of Engineers*, **39**, 157–169.
- Lebour, G.A. 1881. On the present state of our knowledge of underground temperatures, with special reference to the nature of the experiments still required in order to improve that knowledge. *Transactions of the North of England Institute of Mining and Mechanical Engineers*, **XXXI**, 59–73.
- LoCAL. 2019. *Low-Carbon After-Life: sustainable use of flooded coal mine voids as a thermal energy source – a baseline activity for minimising post-closure environmental risks (LoCAL)*. Report for the European Union EUR 29544 EN, Publications Office of the European Union, Luxembourg.
- Monaghan, A.A., Dochartaigh, O. *et al.* 2017. *UKGEOS - Glasgow Geothermal Energy Research Field Site (GGERFS): Initial summary of the geological platform*. British Geological Survey Open Report, **OR/17/006**, <http://nora.nerc.ac.uk/id/eprint/518636/13/OR17006.pdf>
- Monaghan, A.A., Starcher, V., Ó Dochartaigh, B.E., Shorter, K.M. and Burkin, J. 2019. *UK Geoenergy Observatories: Glasgow Geothermal Energy Research Field Site: Science Infrastructure Version 2*. British Geological Survey Open Report, **OR/19/032**, <http://nora.nerc.ac.uk/id/eprint/522814/>
- National Rivers Authority. 1994. *Abandoned mines and the water environment*. National Rivers Authority Water Quality Series, **14**. HMSO, London, <http://www.environmentdata.org/fedora/repository/ealit:4107/OBJ/20002953.pdf>
- Preene, M. and Younger, P.L. 2014. Can you take the heat? – Geothermal energy in mining. *Mining Technology*, **123**, 107–118, <https://doi.org/10.1179/1743286314Y.0000000058>
- Prestwich, J. 1887. On underground temperature; with observations on the conductivity of rocks; on the thermal effects of saturation and imbibition; and on a special source of heat in mountain ranges. *Proceedings of the Royal Society of London*, **41**, 1–116, <https://doi.org/10.1098/rspl.1886.0082>
- Ramos, E.P., Breede, K. and Falcone, G. 2015. Geothermal heat recovery from abandoned mines: a systematic review of projects implemented worldwide and a methodology for screening new projects. *Environmental Earth Sciences*, **73**, 6783–6795, <https://doi.org/10.1007/s12665-015-4285-y>
- Rees, J.P. 1920–21. Third report of the committee on ‘The Control of Atmospheric Conditions in Hot and Deep Mines’. *Transactions of the Institution of Mining Engineers*, **LXI**, 101–114.
- Rollin, K.E. 1987. *Catalogue of geothermal data for the land area of the United Kingdom. Third revision: April 1987. Investigation of the Geothermal Potential of the UK*. British Geological Survey, Keyworth.
- Soares, A.R. 2019. *Global to regional taxonomic and genomic diversity of subterranean microbiomes*. PhD, Aberystwyth University.
- Stephenson, M.H., Ringrose, P., Geiger, S., Bridden, M. and Schofield, D.I. 2019. Geoscience and decarbonization: current status and future directions. *Petroleum Geoscience*, **25**, 501–508, <https://doi.org/10.1144/petgeo2019-084>
- Thomas, L.P., Evans, R.B. and Downing, R.A. 1983. *The geothermal potential of the Devonian and Carboniferous rocks of South Wales (contract A1-041-80-UK)*. Institute of Geological Sciences, London.
- Todd, F., McDermott, C., Harris, A.F., Bond, A. and Gilfillan, S. 2019. Coupled hydraulic and mechanical model of surface uplift due to mine water rebound: implications for mine water heating and cooling schemes. *Scottish Journal of Geology*, **55**, 124–133, <https://doi.org/10.1144/sjg2018-028>
- Townsend, D., Naismith, J.D.A., Townsend, P.J., Milner, M.G. and Fraser, U.T. 2020. ‘On the Rocks’ – Exploring Business Models for Geothermal Heat in the Land of Scotch. *Proceedings World Geothermal Congress 2020, Reykjavik, Iceland*, <https://pangea.stanford.edu/ERE/db/WGC/papers/WGC2020/08025.pdf>
- Verhoeven, R., Willems, E., Harcouët-Menou, V., De Boever, E., Hiddes, L., Op ‘t Veld, P. and Demollin, E. 2014. Mine water 2.0 project in Heerlen, the Netherlands: transformation of a geothermal mine water pilot project into a full scale hybrid sustainable energy infrastructure for heating and cooling. *Energy Procedia*, **46**, 58–67, <https://doi.org/10.1016/j.egypro.2014.01.158>
- Watson, S.M., Westaway, R. and Burnside, N.M. 2019. Digging deeper: the influence of historic mining on Glasgow’s subsurface thermal state to inform geothermal research. *Scottish Journal of Geology*, **55**, 107–123, <https://doi.org/10.1144/sjg2019-012>
- White Young Green. 2007. *South Wales Coalfield. Potential for heat extraction from mine water discharges*. Report ref 130307. Report for the National Assembly for Wales.
- Younger, P.L. 2014. Hydrogeological challenges in a low-carbon economy. *Quarterly Journal of Engineering Geology and Hydrogeology*, **47**, 7–27, <https://doi.org/10.1144/qjegh2013-063>
- Younger, P.L. 2016. Abandoned coal mines: From environmental liabilities to low-carbon energy assets. *International Journal of Coal Geology*, **164**, 1–2, <https://doi.org/10.1016/j.coal.2016.08.006>
- Younger, P.L., Manning, D.A.C., Millward, D., Busby, J.P., Jones, C.R.C. and Gluyas, J.G. 2016. Geothermal exploration in the Fell Sandstone formation (Mississippian) beneath the city centre of Newcastle upon Tyne, UK: the Newcastle Science Central Deep Geothermal Borehole. *Quarterly Journal of Engineering Geology and Hydrogeology*, **49**, 350–363, <https://doi.org/10.1144/qjegh2016-053>