




**British  
Geological Survey**  
Expert | Impartial | Innovative



## UKGEOs Cheshire Energy Research Field Site

---

- Science infrastructure

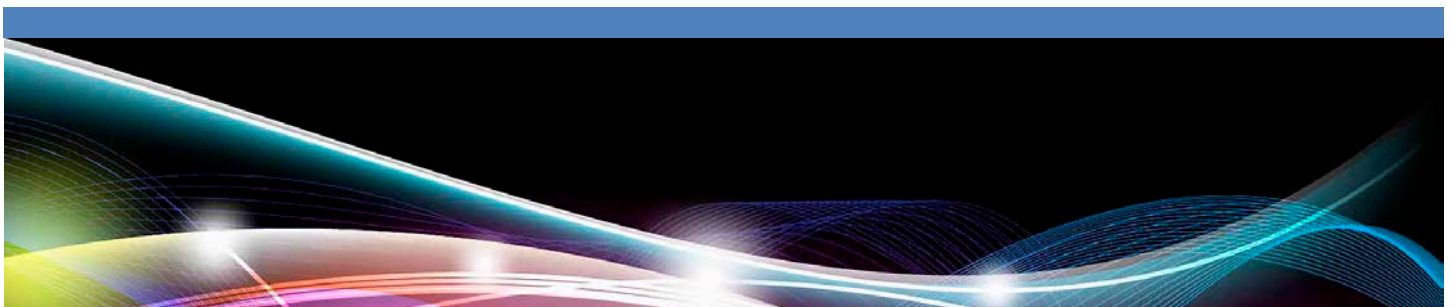

BRITISH GEOLOGICAL SURVEY

UK GEOENERGY OBSERVATORIES PROGRAMME

OPEN REPORT OR/18/055

# UKGEOs Cheshire Energy Research Field Site

SCIENCE INFRASTRUCTURE

A. Kingdon, R.A. Dearden and M.W. Fellgett

Contributors

J. Midgley, J.W. Elsome, C. Chapman, S.P. Burke, E. Hough, R.R. Luckett, M. Bianchi

The National Grid and other Ordnance Survey data ©Crown Copyright and database rights 2017. Ordnance Survey Licence No. 100021290 EUL.

Copyright in material derived from the British Geological Survey's work is owned by the Natural Environment Research Council (NERC) and/or the authority that commissioned the work. You may not copy or adapt this publication without first obtaining permission. Contact the BGS Intellectual Property Rights Section, British Geological Survey, Keyworth, email [ipr@bgs.ac.uk](mailto:ipr@bgs.ac.uk). You may quote extracts of a reasonable length without prior permission, provided a full acknowledgement is given of the source of the extract.

Maps and diagrams in this book use topography based on Ordnance Survey mapping.

© NERC 2017. All rights reserved

Keyworth, Nottingham British Geological Survey

## BRITISH GEOLOGICAL SURVEY

The full range of our publications is available from BGS shops at Nottingham, Edinburgh, London and Cardiff (Welsh publications only) see contact details below or shop online at [www.geologyshop.com](http://www.geologyshop.com)

The London Information Office also maintains a reference collection of BGS publications, including maps, for consultation.

We publish an annual catalogue of our maps and other publications; this catalogue is available online or from any of the BGS shops.

*The British Geological Survey carries out the geological survey of Great Britain and Northern Ireland (the latter as an agency service for the government of Northern Ireland), and of the surrounding continental shelf, as well as basic research projects. It also undertakes programmes of technical aid in geology in developing countries.*

*The British Geological Survey is a component body of the Natural Environment Research Council.*

*British Geological Survey offices*

### **BGS Central Enquiries Desk**

Tel 0115 936 3143

email [enquiries@bgs.ac.uk](mailto:enquiries@bgs.ac.uk)

### **Environmental Science Centre, Keyworth, Nottingham NG12 5GG**

Tel 0115 936 3241

email [sales@bgs.ac.uk](mailto:sales@bgs.ac.uk)

### **The Lyell Centre, Research Avenue South, Edinburgh EH14 4AP**

Tel 0131 667 1000

email [scotsales@bgs.ac.uk](mailto:scotsales@bgs.ac.uk)

### **Natural History Museum, Cromwell Road, London SW7 5BD**

Tel 020 7589 4090

Tel 020 7942 5344/45

email [bgs london@bgs.ac.uk](mailto:bgs london@bgs.ac.uk)

### **Cardiff University, Main Building, Park Place, Cardiff CF10 3AT**

Tel 029 2167 4280

### **Maclean Building, Crowmarsh Gifford, Wallingford OX10 8BB**

Tel 01491 838800

### **Geological Survey of Northern Ireland, Department of Enterprise, Trade & Investment, Dundonald House, Upper Newtownards Road, Ballymiscaw, Belfast, BT4 3SB**

Tel 028 9038 8462

[www.bgs.ac.uk/gsni/](http://www.bgs.ac.uk/gsni/)

### *Parent Body*

### **Natural Environment Research Council, Polaris House, North Star Avenue, Swindon SN2 1EU**

Tel 01793 411500

[www.nerc.ac.uk](http://www.nerc.ac.uk)

Website [www.bgs.ac.uk](http://www.bgs.ac.uk)

Shop online at [www.geologyshop.com](http://www.geologyshop.com)

## Foreword

This report presents a record of the infrastructure provided by the UK Geoenergy Observatories Cheshire Energy Research Field Site. It sets out the basic monitoring, sample collection and analysis that will be carried out by the British Geological Survey on behalf of the UK research community and international collaborators. All data generated by the British Geological Survey and researchers who use the facility will be freely and openly available. It is expected that individual research projects, funded separately, will have specific operational requirements, and where possible on the grounds of capability and capacity these will be accommodated, following discussion with and approval from the facility's management team.

The design of the infrastructure was based on the requirements of the UK Geoenergy Observatories' Science Plan, which was generated following community consultation. As with all drilling projects, the realities of what can be achieved in the context of geological constraints, health and safety, and budget have meant that the final design is necessarily a compromise. Researchers should use this document as the definitive description of the Observatories' infrastructure, and refer to it in their published outputs.

Professor David Manning

NERC Senior Science User, UK Geoenergy Observatories

## Acknowledgements

The British Geological Survey (BGS) is constructing and operating the UK Geoenergy Observatories on behalf of the Natural Environment Research Council and UK Research and Innovation (UKRI). Funding for the Observatories has been provided by the UK Government Department for Business, Energy and Industrial Strategy (BEIS).

The authors wish to thank the UK Geoenergy Observatories delivery team for their contribution to the content of this report.

All photos are BGS copyright.

Maps throughout this book were created using ArcGIS® software by Esri. ArcGIS® and ArcMap™ are the intellectual property of Esri and are used herein under license. Copyright © Esri. All rights reserved. For more information about Esri® software, please visit [www.esri.com](http://www.esri.com).

# Contents

<b>Foreword.....</b>	<b>i</b>
<b>Acknowledgements.....</b>	<b>i</b>
<b>Contents.....</b>	<b>ii</b>
<b>1 Project overview .....</b>	<b>1</b>
1.1 Overview .....	1
1.2 Geological Overview & Research potential of this Location .....	2
1.3 Availability of High quality geoscience data .....	3
1.4 Scope of the facility .....	3
<b>2 Geological and Hydrogeological Context .....</b>	<b>5</b>
2.1 Site location.....	5
2.2 Quaternary geology.....	6
2.3 Bedrock and structural setting .....	7
2.4 Hydrogeology of the bedrock.....	9
2.5 Hydrochemistry .....	10
<b>3 Research infrastructure .....</b>	<b>10</b>
3.1 Overview of science infrastructure.....	10
3.2 Array 1 Groundwater baseline .....	11
3.3 Array 2 Seismic.....	13
3.4 Array 3 Deep well .....	15
3.5 Array 4 Multiscale array.....	17
3.6 Ground motion .....	20
3.7 Air quality .....	22
<b>4 Physical collections and related data acquisition.....</b>	<b>22</b>
4.1 Overview .....	22
4.2 Drilling data .....	23
4.3 Core material.....	23
4.4 Geophysical Wireline logging .....	23
<b>5 Data portal.....</b>	<b>24</b>
5.1 Overview .....	24
5.2 Access to near real-time environmental baseline data.....	24
<b>Appendix 1: Working at UKGEOS .....</b>	<b>25</b>
Overview .....	25
Welfare facilities .....	25

Science facilities .....	25
<b>Appendix 2: Core scanning facilities .....</b>	<b>26</b>
<b>Appendix 3A: Array 1 Borehole Descriptions .....</b>	<b>29</b>
Borehole Components of Array 1 .....	29
Above-ground data acquisition in Array 1 .....	30
Subsurface Data Acquisition in Array 1 .....	30
<b>Appendix 3B: Array 2 Borehole Descriptions .....</b>	<b>33</b>
Monitoring Components of Array 2 .....	33
<b>Appendix 3C: Array 3 Borehole Description .....</b>	<b>35</b>
Intended purpose of Array 3 .....	36
Components of Array 3 .....	36
Data Acquisition in Array 3 .....	36
<b>Appendix 3D: Array 4 Borehole Descriptions .....</b>	<b>38</b>
Components of Array 4 .....	39
Data acquisition in Array 4 .....	39
<b>References .....</b>	<b>41</b>

## FIGURES

Figure 1 View over Ince Marshes towards Runcorn including Frodsham windfarm .....	1
Figure 2 Ince Marshes, the East Irish Sea and Cheshire basins modelled on the top of the Variscan unconformity. Colour coding indicates depth below surface: yellow is shallow; blue is deep. ....	3
Figure 3 View over Ince Marshes .....	4
Figure 4 A diagrammatic cross-section of the geology of the Ince Marshes area including, anthropogenic, superficial, and bedrock geology .....	5
Figure 5 Lithoframe viewer model of the Quaternary deposits in the area around Ince Marshes .....	6
Figure 6 General structure of the Ince Marshes area, based on interpretation of seismic-reflection line SC-83-128V, illustrating the Ince Marshes horst structure defined by the Waverton fault zone to the west and Dungeon Banks fault zone to the east. FZ = fault zone. (Seismic data courtesy of <a href="#">UKOGL</a> ). ....	8
Figure 7 Schematic cross-section identifying key hydrogeological features of the Permo-Triassic sandstone aquifer in the Ince Marshes area .....	9
Figure 8 Array 1 Groundwater baseline monitoring locations. Contains Ordnance Survey data © Crown copyright and database rights. All rights reserved 2019. Ordnance Survey [100021290 EUL]. Created using ArcGIS. Copyright © Esri. All rights reserved. ....	11

Figure 9 Array 2 Seismic baseline monitoring locations. Contains Ordnance Survey data © Crown copyright and database rights. All rights reserved 2019. Ordnance Survey [100021290 EUL]. Created using ArcGIS. Copyright © Esri. All rights reserved.....	14
Figure 10 Location of Array 3 Deep borehole. Array 4 is immediately adjacent. Contains Ordnance Survey data © Crown copyright and database rights. All rights reserved 2019. Ordnance Survey [100021290 EUL]. Created using ArcGIS. Copyright © Esri. All rights reserved.....	16
Figure 11 Close up location of Array 4, showing proximity to Array 3. Contains Ordnance Survey data © Crown copyright and database rights. All rights reserved 2019. Ordnance Survey [100021290 EUL] Created using ArcGIS. Copyright © Esri. All rights reserved.....	18
Figure 12 Locations of boreholes within Array 4 Created using ArcGIS. Copyright © Esri. All rights reserved.....	19
Figure 13 Passive inSAR reflector.....	21
Figure 14 MSCL-RXCT core scanner and example 2D X-ray radiograph (Geotek MSCL – RXCT).....	26
Figure 15 Multi-sensor core logging scanner (Geotek MSCL-S) .....	27
Figure 16 X-ray fluorescence scanner (Geotek, MSCL-XYZ XRF) .....	28
Figure 17 Array 3 Borehole construction / casing options and prognosis.....	37

## **TABLES**

Table 1: Stratigraphic depths on the horst and eastern graben.....	7
Table 2: Analytical outputs from air monitoring programme .....	22
Table 3: Array 1 Summary borehole metadata and planned sampling.....	29
Table 4: Array 1 List of borehole codes and site locations (Cored boreholes in Bold).....	30
Table 5: Array 1 planned hydrogeochemical sampling: summary of intended sample types.....	31
Table 6: Array 1 Non-geochemical sampling (Groundwater Baseline) .....	32
Table 7: Array 2 Summary borehole metadata and planned sampling.....	33
Table 8: Array 2 List of borehole codes and site locations (Cored borehole in Bold).....	34
Table 9: Array 3 Summary borehole metadata and planned sampling.....	35
Table 10: Array 4 Summary borehole metadata and planned sampling.....	38
Table 11: Array 4 List of borehole codes and site locations (Cored boreholes in Bold) .....	39



# 1 Project overview

## 1.1 OVERVIEW

The aim of the UK Geoenergy Observatories project is to establish new centres for world-leading research into the subsurface environment. The knowledge generated will contribute to the responsible development of new subsurface technologies, both in the UK and internationally.

The project, commissioned by the [Natural Environment Research Council](#) (NERC) and UKRI on behalf of BEIS, follows the 2014 decision that the Government would spend £31 million to create world-class, subsurface energy-research test centres. The British Geological Survey (BGS) has the responsibility for delivering the research infrastructure and managing access to these facilities over their anticipated 15-year lifetime.

The BGS consulted with a range of stakeholders to identify two preferred geological locations. The first research field site will be in Cheshire south of the River Mersey near the villages of Thornton and Elton, and will provide data to underpin research into a number of new energy technologies that will directly help reduce atmospheric carbon emissions, for example CO<sub>2</sub> storage, shallow geothermal, and aquifer storage of heat and compressed air. The second research field site (Monaghan, 2018) will be in Glasgow, close to the Cuningar Loop in the River Clyde and will focus on shallow geothermal energy. The [Science Plan](#), developed through a consultation process, ensures that UKGEOS provides for the current and future needs of the scientific user community.



**Figure 1 View over Ince Marshes towards Runcorn including Frodsham windfarm**



## 1.2 GEOLOGICAL OVERVIEW & RESEARCH POTENTIAL OF THIS LOCATION

The Cheshire site was chosen for its scientific potential, as the geology underlying the location presents opportunities for both academic and industrial research:


**Quaternary deposits** - At the surface are Quaternary sediments that are representative of surface 'ice age' sediments across the UK. They provide opportunities for research relating to engineering problems, natural shallow gas migration, the potential for shallow geothermal technologies, anthropogenic influences as well as groundwater flow and transport.

**Permo-Triassic sandstones** - Beneath the Quaternary sediments are sandstones of the Permian-Triassic Sherwood Sandstone and the Collyhurst Sandstone. The Sherwood Sandstone, is the UK's second most important aquifer and so research is envisaged to characterise controls on groundwater flow and the factors that affect its quality. The Sherwood Sandstone and Collyhurst Sandstone will also be investigated and described as they are potential targets for carbon capture and storage (CCS) in the North Sea and east Irish Sea. The Sherwood Sandstone and Collyhurst Sandstone also suitable rocks for geothermal energy research, specifically low enthalpy heat.

**Caprock sedimentary layers** - The Manchester Marl is a low permeability Permian age sedimentary rock that is, in some UK locations, the caprock envisaged for proposed exploitation of unconventional hydrocarbon resources. This strata is relatively close to the surface at Ince Marshes, allowing research into the flow characteristics of low permeability layers. The Permo-Triassic overlies mudstone beds of the Carboniferous Halesowen Formation and also the mudstone and siltstone and scattered sandstone beds of the Pennine Coal Measures Group and Millstone Grit Formation, which offer similar research opportunities.

**Prospective shale** - Beneath the Pennine Coal Measures Group and Millstone Grit Formation are the shales and limestones of the Craven Group, which are a target for shale gas exploration in the north of England. The Cheshire observatory would be used to independently monitor and observe any industrial shale gas exploration activities that took place in the Ince Marches area by observing groundwater quality (temperature, pH, gas content, water level), seismicity, and other possible ground movements. Such data could also provide insights into the response of the subsurface to shale gas extraction, which would be of benefit to planners, local authorities, policy makers, regulators, researchers and the public.

**Structural and basin complexity** - The Ince Marshes site has an almost geologically unique structural position on a geological structural 'high' between the large East Irish Sea and Cheshire basins (Figure 2). The area is structurally complex, with faults on each side that offer excellent opportunities to study whether these faults are seals, or whether they allow transmission of fluids and gases. In addition, there is the potential for research to investigate the processes that led to fault formation and seismicity. Such structural highs are important when considering buoyant fluids such as CO<sub>2</sub>, and the management of fluid flow and geomechanics in basins.

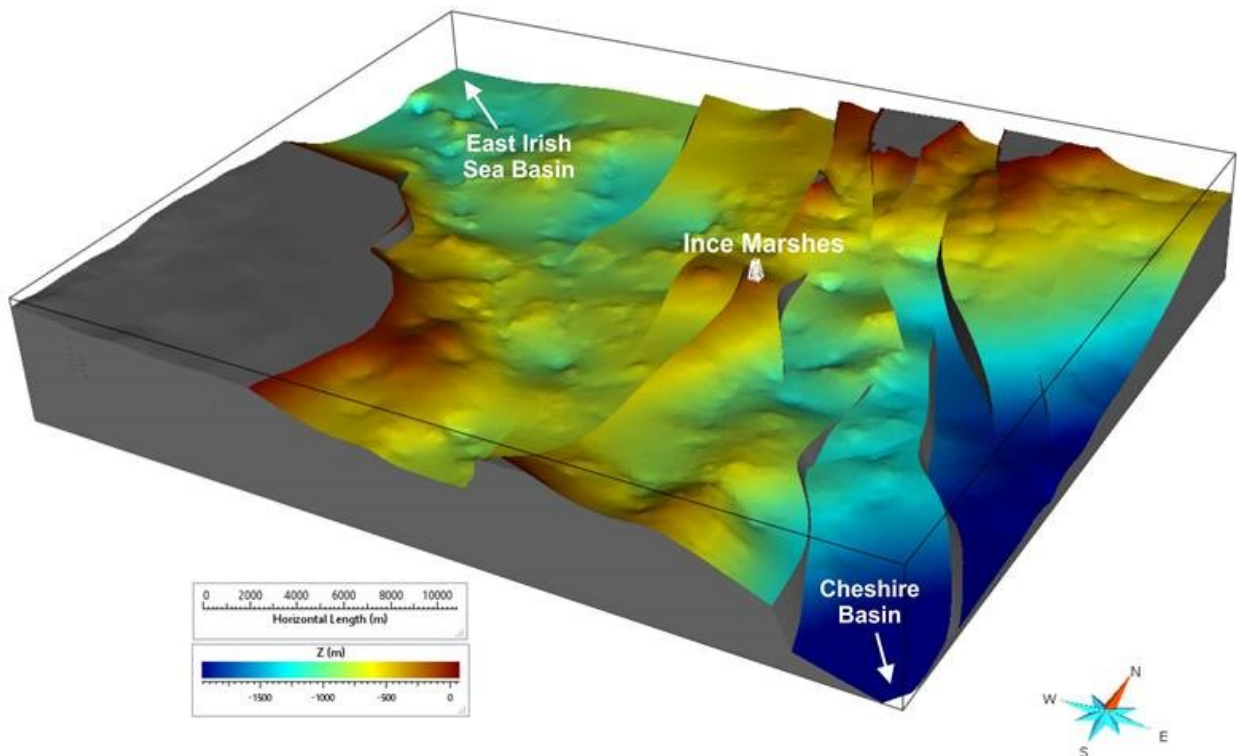

**Figure 2** Ince Marshes, the East Irish Sea and Cheshire basins modelled on the top of the Variscan unconformity. Colour coding indicates depth below surface: yellow is shallow; blue is deep.

### 1.3 AVAILABILITY OF HIGH QUALITY GEOSCIENCE DATA

A key rationale for developing the Cheshire Energy Research Field Site (CERFS) is that there is extensive geological data already available for this area. This includes good quality 3D seismic survey data and extensive 2D seismic from the oil and coal industries (available from UKOGL). The geology has been directly sampled by exploration and appraisal wells for coal, coal bed methane, conventional oil and gas, and unconventional gas, including some high quality geophysical log suites. Much of this data is available to view, and some for download, on the BGS website. Such a quality, variety and density of data is available in only a few locations in northern England and this provides an excellent basis for further research at Ince Marshes.

### 1.4 SCOPE OF THE FACILITY

The Cheshire Energy Research Field Site spans over 20 square kilometres of Cheshire. Its main focus is around 50 purpose-drilled boreholes of between 50 and 1200 metres depth - the total drilled length of all boreholes will exceed 8000 metres. Over 1800 state-of-the-art sensors will be installed that will track seismicity, changes to groundwater flow and quality, temperature and hydraulic properties. These will provide data from the surface to 1200 metres depth and this will be streamed online in real-time allowing wide public observation of Cheshire's subsurface.

Almost 3000 metres of rock core will be sampled from these boreholes and scanned with state-of-the-art core scanners (recently installed at BGS's headquarters in Keyworth) to characterise its physical and geochemical properties. Rock core and scan data will then be made available to the research community for sampling and analysis. In addition, researchers will be able to request samples of core material that have been preserved immediately after recovery for biological, physical and geochemical analyses. All project data will be made available online free of charge after any required quality checks have been completed.

From 2020 the Cheshire Energy Research Field Site will be open to researchers for field experiments. Researchers will have access to both the borehole arrays and data from £2m worth

of installed instrumentation. They will also be able to deploy their own equipment. The vision is to encourage international scientists to focus their research efforts in this area by creating a volume of rock characterised to the highest standards. This will support world-leading science, creating a step-change in geological and process understanding.

BGS will provide access to scientific facilities at the Cheshire observatory. It is also envisaged that laboratory and welfare facilities, including a restaurant, will be available as workspaces at the nearby Thornton Science Park. At BGS Keyworth there will be the opportunity to sample and analyse core material and work with the new core scanning laboratory.

Finally, an innovative web portal is being developed to meet the needs of the public and the research community. This will include a state-of-the-art interactive 3D geological model to visualise the research facility and showcase the power of the data being generated to support scientific understanding. The portal will also provide access to an extensive archive of data from the installation and operational phases.



**Figure 3 View over Ince Marshes**


## 2 Geological and Hydrogeological Context

### 2.1 SITE LOCATION

#### 2.1.1 Current Land Use and Made ground

Much of the area is artificially drained reclaimed land, close to the River Mersey and the Manchester Ship Canal. The area is flat, much of it is only slightly above sea-level, less 10 metres OD), reaching around 26 mOD in the Ince–Elton area.

The area includes large areas of present and historic industrial development, agriculture, transport infrastructure, urbanisation and residential development. Potential sources of anthropogenic groundwater contamination include the Stanlow oil refinery and historic landfill sites (neither of these will be sampled directly by CERFS drilling).

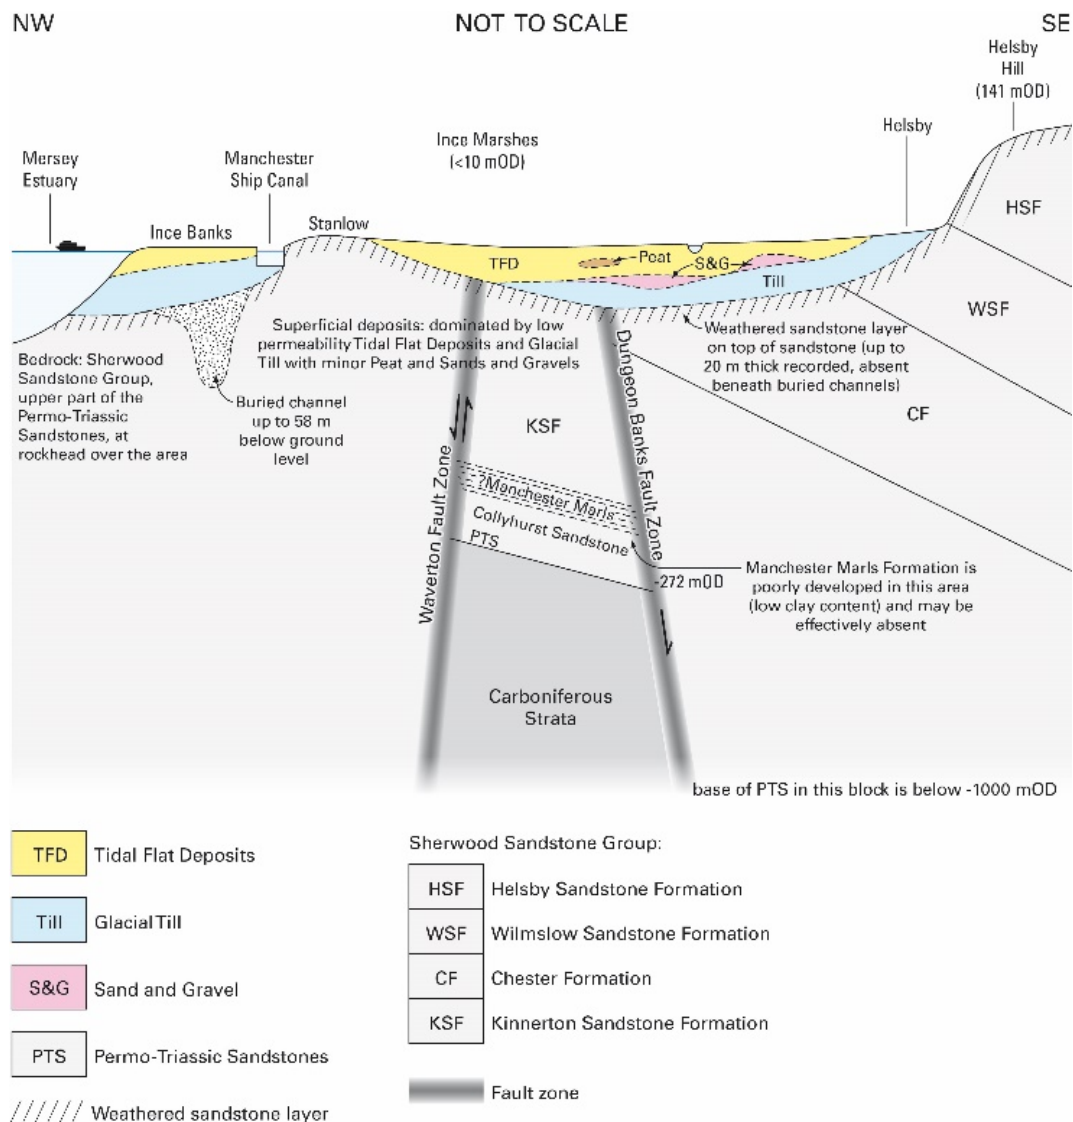

**Figure 4 A diagrammatic cross-section of the geology of the Ince Marshes area including, anthropogenic, superficial, and bedrock geology**




## 2.2 QUATERNARY GEOLOGY

The research site is located on estuarine marshes and tidal flats on the southern bank of the Mersey estuary. It is covered by Quaternary-age superficial deposits of variable thickness up to 60 metres deep, although these are absent beneath parts of Ince and Elton. The upper surface of the bedrock was deeply incised during the Quaternary, with thicker accumulations of alluvium deposits infilling a series of broadly north-trending buried channels. These follow the modern north-flowing tributaries of the River Mersey - the River Gowy and Mill Brook to the west and the Hornsmill/ Peckmill Brook to the east. The extent at depth of these channels is very difficult to prove without drilling as they are hard or impossible to distinguish using surface geophysical techniques. The Quaternary sequence typically comprises unconsolidated sand, silt and clay and may include lenses of peat or organic-rich muds. Peat and blown sand are also present.

The Quaternary deposits overlie a complex sequence of glacial deposits principally comprising till (boulder clay), with lenses of glacio-fluvial sand and gravel and glacio-lacustrine clay. The glacial deposits are complex, varying laterally and vertically across short distances, making geological interpretation difficult in areas where borehole data are sparse or absent.

Permo-Triassic sandstones are present at rockhead over most of the area, with a thick, weathered zone reaching a maximum thickness of at least 20 metres.

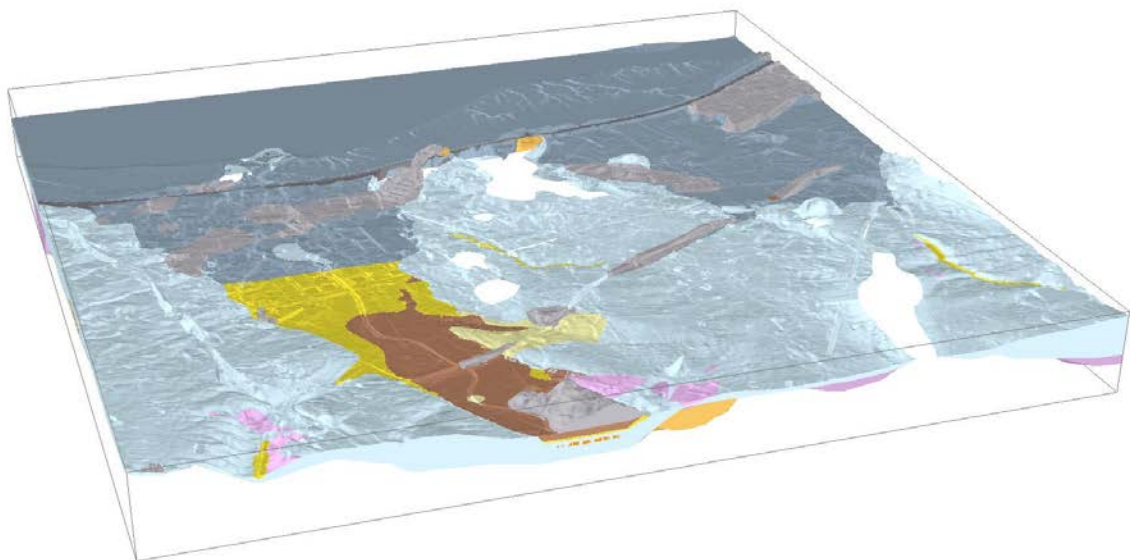

**Figure 5 Lithoframe viewer model of the Quaternary deposits in the area around Ince Marshes**

Further information is available in Burke et al (2016); Lee and Hough (2017) and the BGS Quaternary 3D model.

### 2.2.1 Hydrogeology of the superficial deposits

The variable composition and thickness of the Quaternary superficial deposits affects the hydrogeological regime, with low permeability tidal-flats and glacial till dominating because of their lateral extent. These deposits are expected to be saturated within a few metres of the ground surface, with the water level being strongly influenced by human induced drainage. More permeable deposits, such as glaciofluvial sands and gravels, tend to be present in lenses of limited lateral extent and surrounded by lower-permeability deposits, which limit recharge or discharge. Therefore natural groundwater flow will be minimal within the superficial deposits, with the exception of buried channels. Buried channels are up to tens of metres deep and occasionally up to hundreds of metres wide, infilled with glacial deposits comprising mainly sands, gravels,

clays and silts. Depending on the composition of the infill, these may influence groundwater flow in the area.

## 2.3 BEDROCK AND STRUCTURAL SETTING

The Cheshire Energy Research Field Site is located on the northern margin of the Cheshire Basin. Made ground and a variable thickness of Quaternary deposits unconformably overlay faulted Permo-Triassic sandstone bedrock, which varies in thickness from approximately 250 metres to over 1000 metres. This comprises the Triassic [Sherwood Sandstone Group](#), which is underlain in some locations by the Permian Collyhurst Sandstone Formation and/or the Manchester Marl Formation. Below the Permo-Triassic succession are older Carboniferous strata, with deep boreholes proving sedimentary rocks of the [Warwickshire Group](#), [Coal Measures](#), [Millstone Grit](#) and [Craven Group](#) at depth.


Analysis of 2D seismic-reflection data indicates that the bedrock structure is characterised by a north-trending horst block that is 1–2 kilometres wide in the Thornton area (Figure 6). The horst is defined by the Waverton fault zone to the west, and the Dungeon Banks fault zone to the east. Evidence from deep boreholes sunk for hydrocarbon exploration gives information on bedrock stratigraphy in the area. The Ince Marshes 1 borehole proves the succession on the horst, while the succession in the graben to the east is proved by the Kemira 1 borehole (Table 1).

**Table 1: Stratigraphic depths on the horst and eastern graben**

Stratigraphy(depths quoted in metres to base of unit)	Bedrock geology: horst, as proved by the Ince Marshes 1 borehole	Bedrock geology: eastern graben, as proved by the Kemira 1 borehole
Permo-Triassic	272	1042
Carboniferous Warwickshire Group	331	1221
Carboniferous Pennine Coal Measures Group	945	1438 (terminal depth)
Carboniferous Millstone Grit Group	1577 (terminal depth)	Not proved

### 2.3.1 Sherwood Sandstone Geology

The Sherwood Sandstone Group typically comprises red and grey fine- to medium-grained sandstone with rare pebbles. Deformation bands (zones of grain-size reduction formed in response to stress) are developed locally. The upper part of the bedrock has locally been weathered to an uncemented sand and gravel to a depth of 10 - 20 metres. Further information is available from Hannis and Gent (2017) and Fellgett et al. (2017).

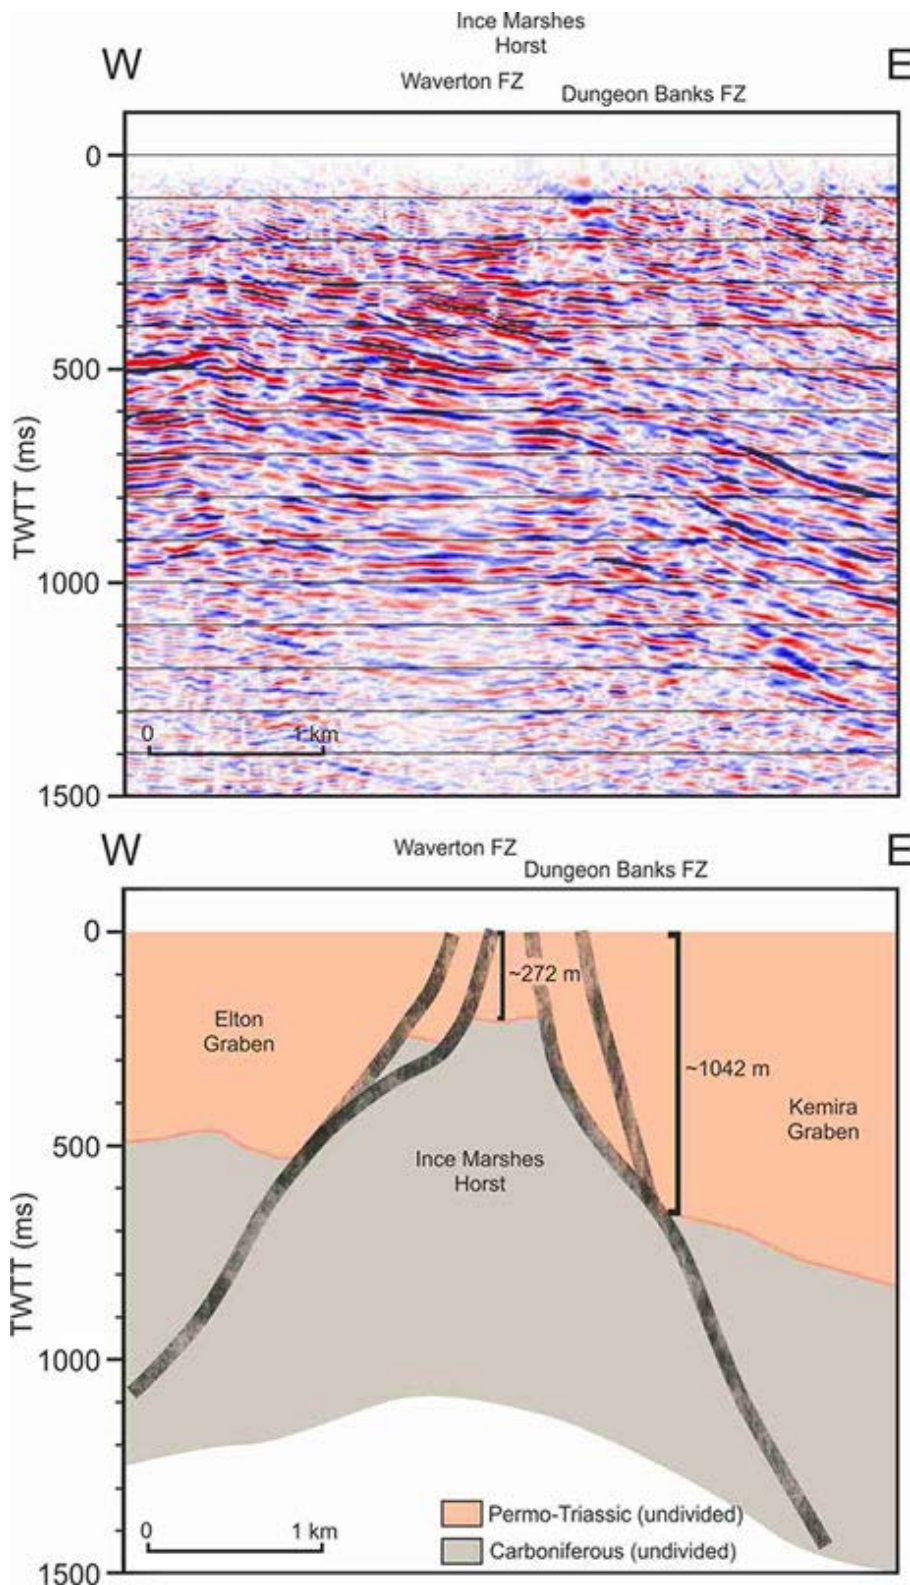

**Figure 6** General structure of the Ince Marshes area, based on interpretation of seismic-reflection line SC-83-128V, illustrating the Ince Marshes horst structure defined by the Waverton fault zone to the west and Dungeon Banks fault zone to the east. FZ = fault zone. (Seismic data courtesy of [UKOGL](#)).




## 2.4 HYDROGEOLOGY OF THE BEDROCK

The Sherwood Sandstone Group is a principal aquifer. Groundwater abstraction is important in this region for public water supply, for example at Plemstall 5 kilometres south of Elton, and also industry and agriculture. A key feature of this aquifer is slow response to change, with observation wells showing a damped response to recharge and abstraction. Groundwater levels have been modified over time by large abstractions

The Permo-Triassic sandstones have moderate matrix permeability with fractures providing secondary permeability. The hydraulic conductivity is highly anisotropic, with considerably higher horizontal hydraulic conductivity than vertical, due mainly to the presence of marl horizons within the sandstones. Bulk permeability declines with increasing depth and salinity increases; thus the effective aquifer is considered to be about 200 metres thick. The aquifer has high storativity, which accounts for its slow response to perturbations (e.g. abstraction) compared to other UK aquifers.

The regional groundwater head gradient suggests flow in a west to north-west direction from the main recharge area in the east (the higher ground of the Mid-Cheshire Ridge) towards Ince Marshes and the Mersey Estuary. Faulting can affect the Permo-Triassic sandstone aquifer and groundwater flow in a range of ways, with faults sometimes acting as barriers to flow, or having a high permeability forming a preferential flow path. These are documented regionally, but the behaviour of the groundwater flow in the vicinity of the faults near the proposed site is not known.

The Sherwood Sandstone aquifer is mostly confined by low-permeability superficial deposits and the piezometric surface is above the top of the sandstone but below ground level. The hydraulic gradient is very low, and groundwater flow is expected to be very slow. A schematic cross section from the area is shown in Figure 7.

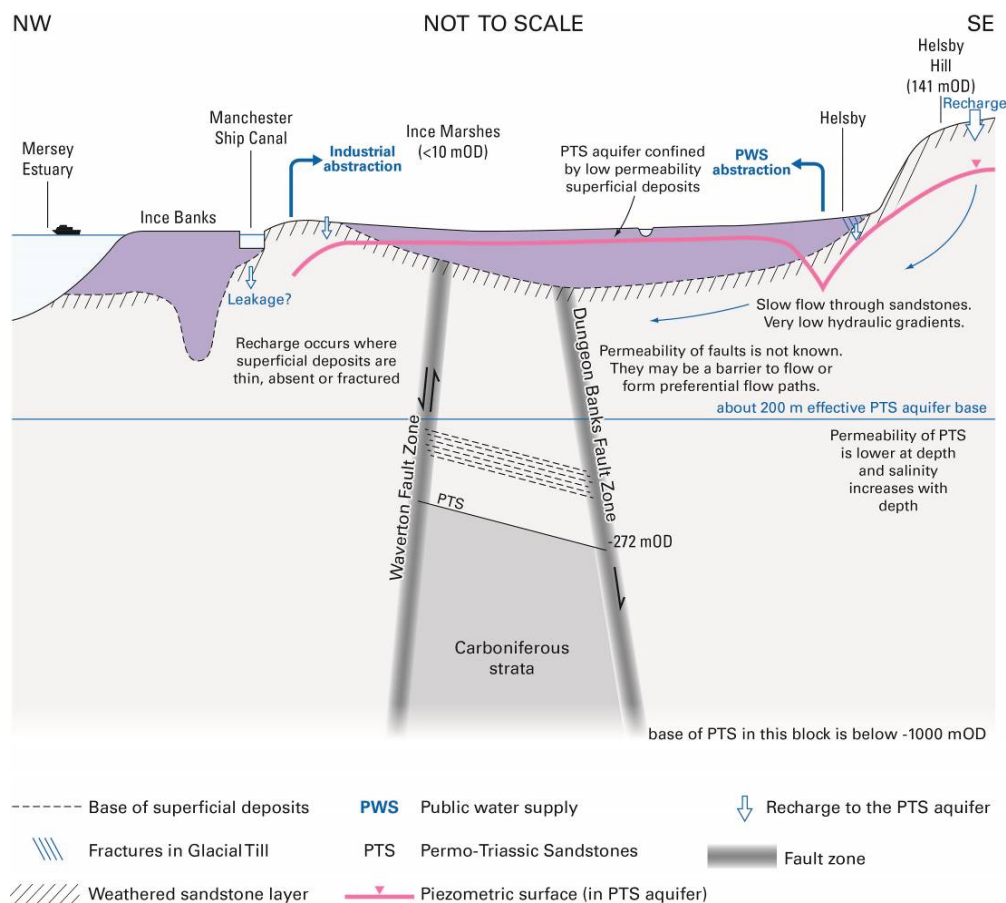

**Figure 7 Schematic cross-section identifying key hydrogeological features of the Permo-Triassic sandstone aquifer in the Ince Marshes area.**

## 2.5 HYDROCHEMISTRY

The natural hydrochemistry of the Sherwood Sandstone aquifer, where measured, is dominated by natural salts, and gives an insight into geological processes.

The Sherwood Sandstone aquifer regionally has zoned salinity; saline palaeo-waters are found at depth with fresh waters at the surface. Saline palaeo-waters are thought to result from halite dissolution and ponding of the resulting saline water during an interglacial (55,000 to 50,000 years ago). The saline water was then pushed to depth due to sea-level fall and refreezing of the ground.

Past and present land use have had considerable effects on the groundwater chemistry. Inundation by abstraction-related marine salinity is seen close to the Mersey Estuary within the upper aquifer, especially around the Stanlow oil refinery. A similar zonation is expected for the redox conditions of the aquifer and associated redox-sensitive hydrochemical parameters. Waters close to the surface are found to be oxic, with low concentrations of dissolved redox-sensitive ions such as iron and manganese, however, deeper groundwaters are reducing with high iron and manganese. The depth of the zones will be variable within the different areas. Faulting will affect zonation with low-permeability faults restricting water movement; this may result in saline palaeo-waters being trapped within faulted blocks.

The historical and recent industrial activity in the area is a significant source of contamination of groundwater in the made ground, superficial deposits and the sandstone. Historical landfill sites used by industry including the refinery and the former Ince power station were often unlined and represent possible point sources of contamination. Run-off and effluent from historical industrial activity along the Mersey's banks flowed into the Mersey Estuary and the Manchester Ship Canal. Although the water quality within the estuary and canal's surface waters has improved, their sediments are still highly contaminated and are a potential source of contamination of surface water and groundwaters, especially where dredged material has been deposited locally on the land surface.

Nitrate contamination is also a widespread issue within the Permo-Triassic sandstone aquifer. This is believed to be mostly agricultural in origin but leaking sewers may also contribute.

For more information on the hydrochemistry of the area see Griffiths et al, 2002.

## 3 Research infrastructure

### 3.1 OVERVIEW OF SCIENCE INFRASTRUCTURE

The Cheshire Energy Research Field Site research infrastructure will comprise of four borehole-based experimental facilities, or arrays, where science can be undertaken:

- Array 1 Groundwater baseline
- Array 2 Seismic Baseline
- Array 3 Deep well
- Array 4 Multiscale array

The infrastructure also includes the following science installations:

- Ground motion sensors
- Air quality monitoring station

Sections 3.2 to 3.5 provide an overview of the infrastructure and instrumentation available for science with a summary of the information for each array available in the document annexes.

## 3.2 ARRAY 1 GROUNDWATER BASELINE


### 3.2.1 Overview

Array 1 provides groundwater baseline data allowing researchers to study and understand the regional groundwater regime. The array and its associated monitoring will allow scientists to consider the temporal and spatial variability across the study area. The aim of the array is to:

- Improve scientific understanding of the subsurface and near-surface environment
- Provide the public with easily accessible and understandable evidence and information on aquifer conditions
- Establish a long-term archive of baseline groundwater data to monitor environmental change resulting directly or indirectly from anthropogenic influences
- Facilitate the development of new sensor technologies for environmental monitoring.

### 3.2.2 Locations

The groundwater baseline array comprises clusters of boreholes at nine locations across the facility area, which measures some 4 by 5 kilometres. Three locations are to the west of the Dungeon Banks Fault, three are on the horst block and three are to the east of the Waverton Fault. This distribution of boreholes is designed to allow groundwater flow and geochemistry to be studied within and between each fault block.

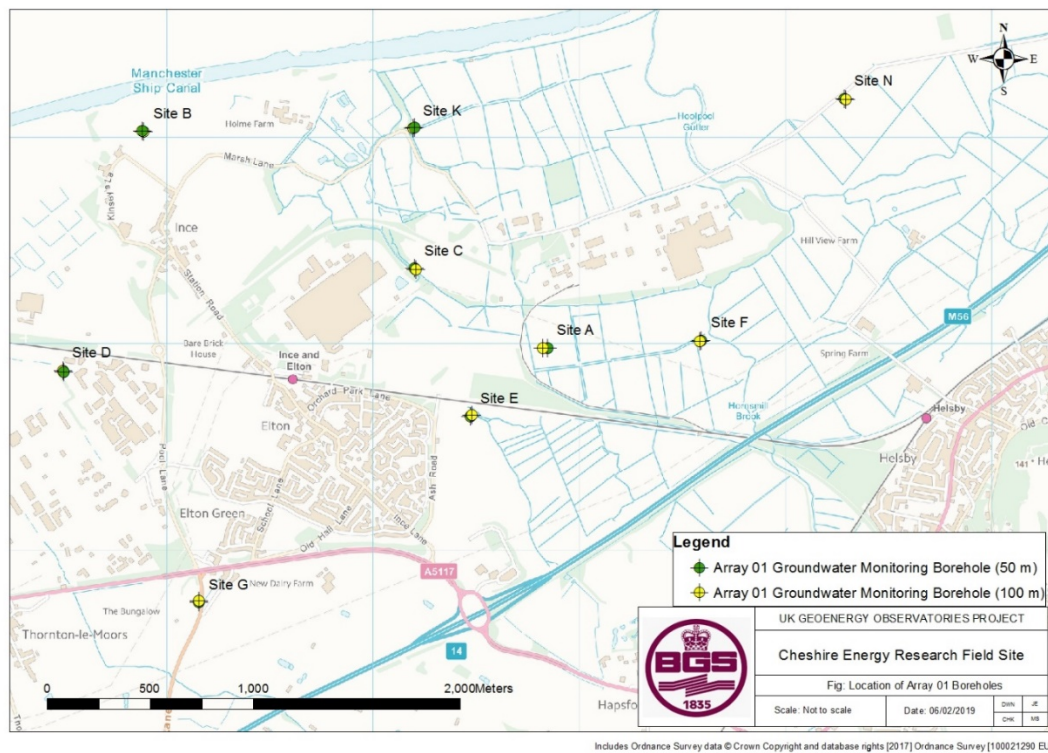

**Figure 8 Array 1 Groundwater baseline monitoring locations. Contains Ordnance Survey data © Crown copyright and database rights. All rights reserved 2019. Ordnance Survey [100021290 EUL]. Created using ArcGIS. Copyright © Esri. All rights reserved.**

### 3.2.3 Infrastructure

All groundwater boreholes are anticipated to penetrate through the Quaternary deposits and terminate in the Sherwood Sandstone. At each of the nine locations there will be a pair of groundwater boreholes screened at different depths within the Sherwood Sandstone. One borehole will be 50 metres deep, have a minimum diameter of 216 mm and a 6 metre screened interval near its base. The other will be 100 metres deep, have a minimum diameter of 216 mm and a 9 metre screened interval near its base. The boreholes have been designed to provide an understanding of vertical variation in groundwater chemistry and hydraulic head across the screened interval.

The boreholes are available for the deployment of groundwater equipment and are equipped with a box above the borehole providing anchors, which can be used to hang equipment. Some locations will also be fitted with cabinets where subsurface sensors and data transmitting equipment can be stored.

### 3.2.4 Scientific instrumentation

All groundwater baseline boreholes have been designed to allow for the installation of scientific instrumentation including, for example:

- Multi-parameter water quality probes
- Pressure transducers
- Submersible sampling and high flow pumps

### 3.2.5 Scientific data acquisition

CERFS will deliver the following data from the groundwater baseline boreholes:

- Hydraulic head – measured via pressure transducers and manual depth measurements.
- Aquifer properties – a series of hydraulic tests, including pump tests and falling head tests will be undertaken
- Groundwater sampling – a groundwater sampling campaign will collect and analyse samples from the boreholes. Sampling will be undertaken bimonthly until a static baseline is obtained and will continue long-term, though reduce in frequency. Analysis will include on-site measurements of pH, Oxidation Reduction Potential (ORP), dissolved oxygen and electrical conductance.
- Samples will be obtained and analysed for: major ions (ion chromatography), a broad suite of trace elements (ICP-MS), dissolved organic carbon (TOC analyser), stable isotopes of water ( $\delta^{18}\text{O}$ ,  $\delta^2\text{H}$ ), TDIC, stable isotopes of methane ( $\delta^{13}\text{C}$ ,  $\delta^2\text{H}$ ), dissolved gases ( $\text{CH}_4$ ,  $\text{CO}_2$ ,  $\text{O}_2$ , radon, noble gases), organic compounds (GC-MS/LC-MS), groundwater 'age' indicators/ environmental tracers (e.g. CFCs,  $\text{SF}_6$ ) and naturally occurring radioactive material (NORM; uranium and thorium decay series).
- Continuously monitored groundwater parameters – A subset of the groundwater boreholes will be equipped with sensor probes that monitor groundwater quality and head at 15 minute intervals. Groundwater parameters measured by these probes may include electrical conductivity, methane, BTEX, PAHs, temperature and barometric pressure. At selected locations this data will be telemetered from the site in real-time and be available via the online data portal.

- Geological core data
- Geophysical borehole logging
- All data collected at the site will be made available openly to researchers, including future data produced by the science community.

### **3.2.6 Intended Sampling regime**

Full operational details including frequency of sampling have yet to be finalised, details of intended analytical proposals are incorporated in Appendix 3A as guidance though are subject to revision. Sampling programmes will typically be undertaken at an initial monthly interval, moving over time to a quarterly cycle with each sampling campaign taking approximately 1 week to complete.

## **3.3 ARRAY 2 SEISMIC**

### **3.3.1 Overview**

Array 2 provides a seismic monitoring network that will improve understanding of the seismic activity within the Cheshire Energy Research Field Site area. The data will form the natural baseline against which future seismic activity will be compared and contrasted. The network will be one of the highest resolution seismic monitoring arrays in the world. It aims to detect earthquakes of -0.6 to -1.0 magnitude - this type of quake is 1000 times smaller than a quake someone is likely to feel.


### **3.3.2 Locations**

The baseline seismic monitoring array comprises instrumentation at ten locations and at an average spacing of 1 kilometre, across an area measuring approximately 4 by 4 kilometres. The area is centred on the defining geological structure of the area and is designed for optimal detection of seismicity on the two main faults. The seismic boreholes are anticipated to penetrate through the Quaternary deposits and terminate in the Sherwood Sandstone Group.

Due to local infrastructure including windfarms, motorways, railways and factories that produce background noise, the seismic monitoring network will be installed in boreholes at a depth of at



least 200 metres to reduce the impact of ambient noise on the seismic response.

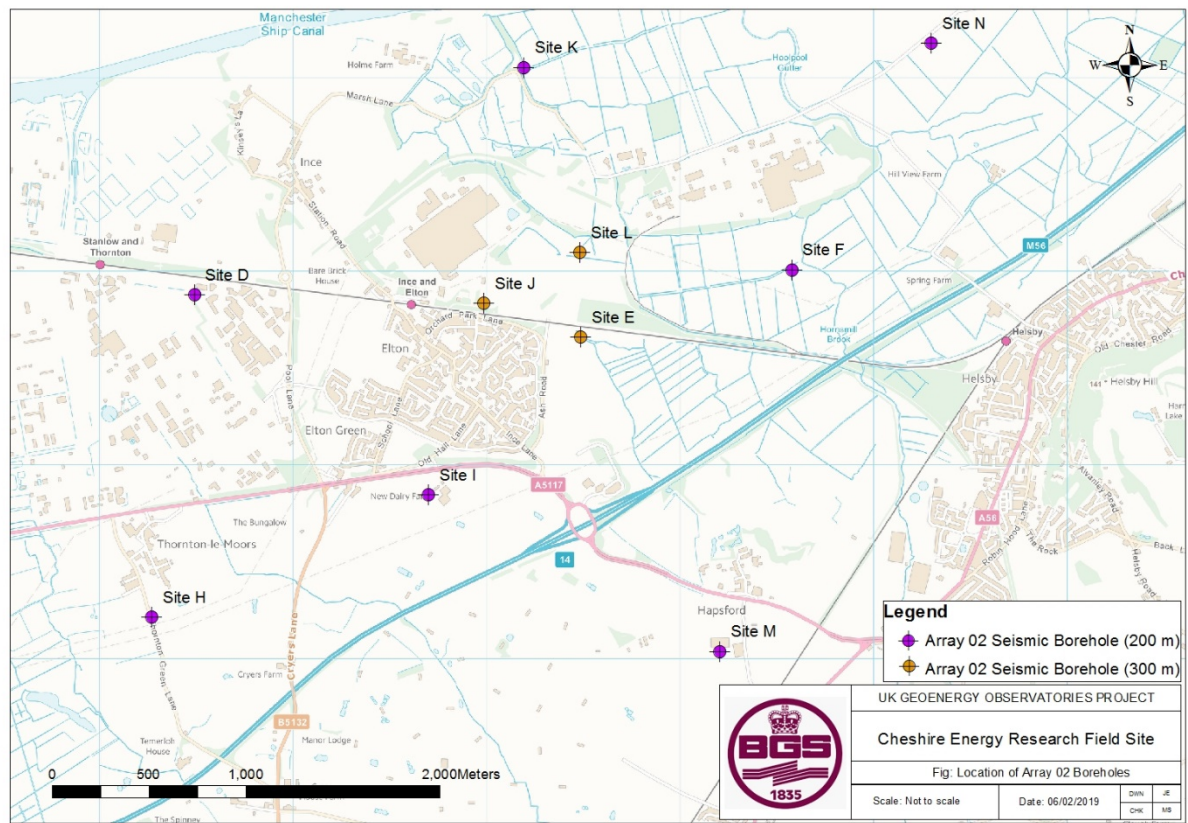

**Figure 9 Array 2 Seismic baseline monitoring locations. Contains Ordnance Survey data © Crown copyright and database rights. All rights reserved 2019. Ordnance Survey [100021290 EUL]. Created using ArcGIS. Copyright © Esri. All rights reserved.**

### 3.3.3 Infrastructure

The 10 boreholes of Array 2 are as follows:

- Three boreholes to a depth of 300 metres. These are equipped with two seismometers, one at 200 metres and one at 100 metres. Up to three 300 metre deep boreholes will also be equipped with acoustic fibre optic from surface to total depth.
- Seven boreholes to a depth of 200 metres. These are equipped with one seismometer each.

Note: A further seismometer (part of Array 3) will be installed in a 1200 metre borehole of terminating in the Millstone Grit Group.

### 3.3.4 Scientific instrumentation

The seismometers are Guralp Radian broadband seismometers that record 3-component acceleration data at 1000 Hz, with a sensitivity of 3000 V/m/s. The seismometers are lowered into the boreholes via a cable and are backfilled with sand, or mechanically held against the borehole

wall with a clamp to ensure that the instrument has a good connection with the rock mass. The seismic data are logged at the surface and telemetered in real-time to the online data portal.

In the seismic boreholes fibre optic cable will be installed (as well as in other arrays). This is a leading edge technology that enables seismic data to be collected by firing a laser beam through the fibre optic cable and monitoring the backscattered light returned.

To protect the expensive seismic instrumentation and in particular the fibre optic cables, these boreholes will not generally be available for the deployment of other scientific equipment.

### **3.3.5 Scientific data acquisition**

The following data will be available from the seismic array:

- Continuous seismographs
- Geophysical borehole logging
- Geological core and cuttings

All data collected at the site will be made openly available to researchers, including data generated by the science community from information provided by this array.

## **3.4 ARRAY 3 DEEP WELL**

### **3.4.1 Overview**


Array 3 comprises a single 1200 metre deep borehole. It will characterise the broad geological succession including Permo-Triassic sandstones overlying Carboniferous Warwickshire Group, Pennine Coal Measures Group, terminating in the strata of the Millstone Grit Group. The borehole trajectory is expected to cross-cut a major fault and so there is uncertainty with regard to the exact sequence of geological units that will be encountered during drilling. Collectively these rocks represent potential barriers to vertical fluid flow, which is an important consideration in the development of subsurface energy resources such as coal bed methane (currently extracted 20 kilometres away near Warrington).

The Array 3 borehole will terminate in the Carboniferous Millstone Grit at 1200 metres and have a diameter of between 100 and 150 mm. The borehole will be cored either from the surface or ca. 550 metres (dependent on the drilling technology) to terminal depth and will be cased throughout the Permo-Triassic succession. Where cased, the borehole will be completed with fibre optic cable installed behind the casing for high resolution measurement of temperature and vibration.

### **3.4.2 Locations**

There will be one deep well located near to the centre of the study area at the location of the main array (where Array 4 is also located).



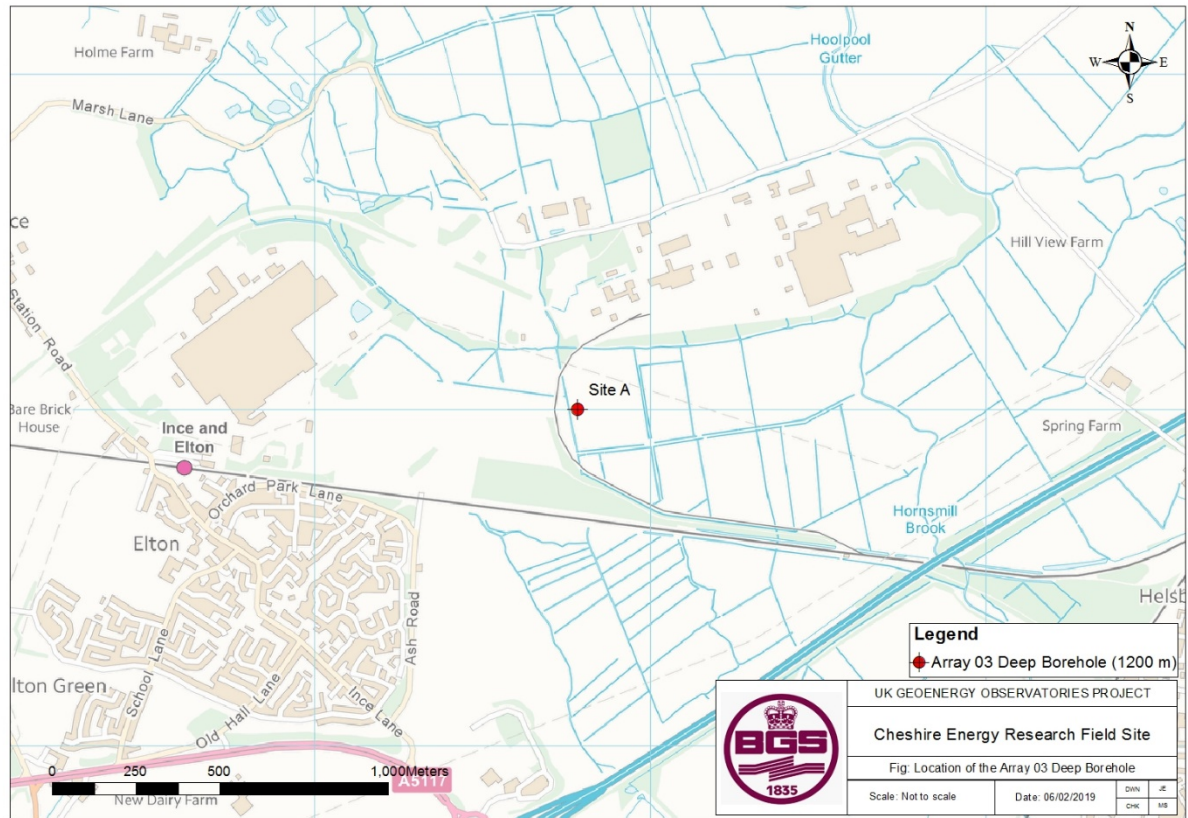

Includes Ordnance Survey data © Crown Copyright and database rights [2017] Ordnance Survey [100021290 EUL]

**Figure 10 Location of Array 3 Deep borehole. Array 4 is immediately adjacent. Contains Ordnance Survey data © Crown copyright and database rights. All rights reserved 2019. Ordnance Survey [100021290 EUL]. Created using ArcGIS. Copyright © Esri. All rights reserved.**

### 3.4.3 Infrastructure

A seismometer will be installed, together with geo-electric cabling and fibre-optic cabling. The borehole will then be back-filled and sealed with engineering cement to avoid the need to maintain such a deep borehole for the duration of the project.

### 3.4.4 Scientific instrumentation

At the terminal depth of the borehole a Guralp Radian broadband seismometer (the same type as described in Section 3.3.4) will be installed. The seismic data will be logged at the surface and telemetered in real-time to the online data portal.

Fibre optic cable, for use in Distributed Temperature Sensing and Distributed Acoustic Sensing will be installed alongside the borehole casing. The fibre optic cable allows for a continuous temperature profile or seismic activity to be measured along its length.

### 3.4.5 Scientific data acquisition

The deep borehole will yield the following data:

- Continuous seismographs
- Continuous vertical profiles of temperature and strain along the length of the fibre optic cable.
- Check shot survey
- Flow testing
- Geological core and cuttings
- Geophysical logging (see later)
- Physical and geochemical core scans (see later)
- Geochemical and microbiological characterisation of core material

All data, including core scan data, will be made available to researchers, including data generated by the science community from information provided by this array.

### **3.5 ARRAY 4 MULTISCALE ARRAY**

#### **3.5.1 Overview**

The multiscale array will allow fluid migration along a fault zone to be observed, and enable hydrogeological and hydrogeophysical characterisation of the rock mass from surface to experimental borehole depth. It will allow subsequent investigation of hydraulic, geophysical and geochemical processes at multiple scales (space and time), particularly in response to changes induced by controlled experiments and/ or industrial activity at Ince Marshes.

Array 4 is located directly above and across a fault zone. It therefore provides the opportunity to investigate fluid flow and solute transport processes in a faulted setting by understanding whether there is any fluid flux either vertically along the fault axis, or horizontally across the fault. This is important for understanding the natural groundwater system as well as for anticipating its response to anthropogenic perturbations. The array will allow field experiments on fluid flow and solute transport to inform predictions (e.g. through numerical modelling) of the response of the groundwater system to anthropogenic perturbations.


The array will also provide a detailed understanding of geological heterogeneity at different spatial scales. Similarly, hydrogeological experiments such as hydraulic tests (e.g. pumping tests, packer tests, slug tests) and tracer injection experiments (e.g. dilution tests, single-well injection-withdrawal tests, horizontal and vertical dipole tracer test) will allow characterization of flow and solute transport properties at different scales.

Geophysical monitoring of the subsurface using the cross-borehole and surface-borehole 2D and 3D geoelectrical imaging technologies installed in the Array 04 boreholes will yield unprecedented volumetric observations of the subsurface. These will contribute to an enhanced understanding of lithological and structural heterogeneity, and allow time-lapse imaging of fluid processes in the near surface including natural (e.g. near surface infiltration, fresh-saline water interface dynamics etc.) and induced changes (e.g. experimental – pumping/tracer tests).

This highly dense array with state of the art geophysical time-lapse monitoring provides the opportunity for integrated hydrogeological and hydro-geophysical experiments, consisting of controlled and continuously monitored perturbations of the natural groundwater flow regime and hydrochemical composition of groundwater.

### 3.5.2 Locations

The multi-scale array will consist of 23 boreholes located within an area of approximately 200 metres by 200 metres at the main array location (adjacent to Array 3 - deep borehole).

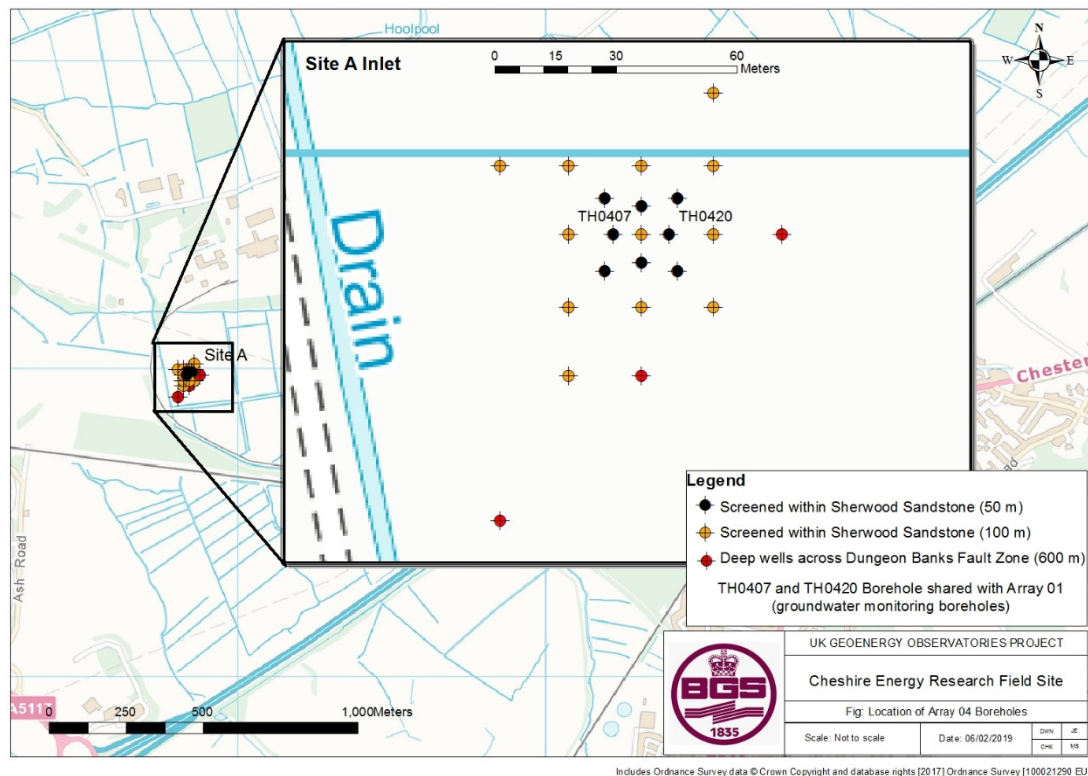

**Figure 11 Close up location of Array 4, showing proximity to Array 3. Contains Ordnance Survey data © Crown copyright and database rights. All rights reserved 2019. Ordnance Survey [100021290 EUL] Created using ArcGIS. Copyright © Esri. All rights reserved.**

### 3.5.3 Infrastructure


The array will comprise the following boreholes:

- Three 216 mm diameter boreholes of 600 metres depth that penetrate the fault near terminal depth. The three boreholes will be positioned along a transect with 50 metres spacing, oriented SE-NW to resolve in detail the location of the Dungeon Bank Fault zone within the area of investigations. The boreholes will be cased (5.5") with electrically insulated steel casing and be screened at intervals across three intervals, allowing access to the faulted aquifer. Outside of the casing, the boreholes will be instrumented with 80 electro-resistivity tomography sensors spaced evenly with depth and a temperature-sensitive fibre optic cable.
- Twelve 216 mm diameter boreholes of 100 metres depth that terminate in the Sherwood Sandstone. The boreholes will be cased (5.5") with PVC casing and will be screened across three intervals, allowing access to the aquifer. Outside of the casing, the boreholes will be instrumented with 80 electro-resistivity tomography sensors spaced

evenly with depth and a temperature-sensitive fibre optic cable. These boreholes are positioned in a regular grid with spacing of 25m.

- Eight 216 mm diameter boreholes of 50 metres depth that terminate in the Sherwood Sandstone. The boreholes will be cased (5.5") with PVC casing and will be screened across three intervals, allowing access to the aquifer. Outside of the casing, the boreholes will be instrumented with 80 electro-resistivity tomography sensors spaced evenly with depth and a temperature-sensitive fibre optic cable. The boreholes are positioned in a regular grid with spacing of 10 m, nested within the 100 metres borehole grid.

All boreholes are anticipated to penetrate the Quaternary deposits and Sherwood Sandstone Group (faulted). The 600 metres boreholes may also penetrate the Collyhurst Sandstone Formation, the Halesowen Formation and the Pennine Coal Measures.

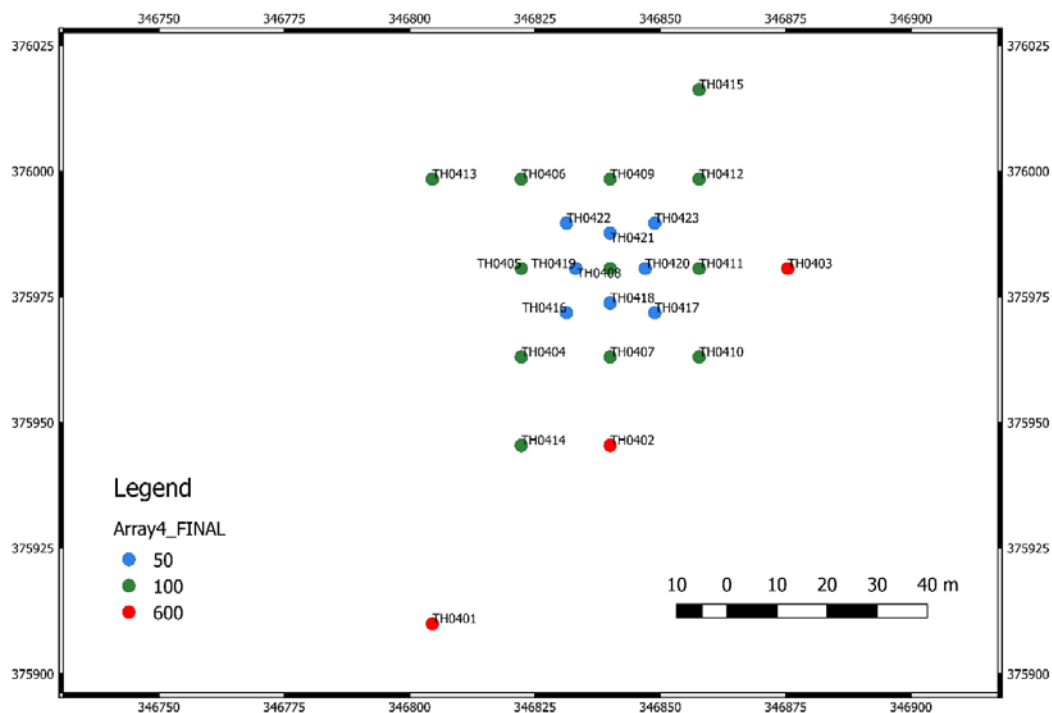

**Figure 12 Locations of boreholes within Array 4 Created using ArcGIS. Copyright © Esri. All rights reserved.**

Fibre optic and electro resistivity cables installed into the boreholes will be laid in trenches and connected together in a data centre located near the array. From this building, computing infrastructure will stream data to scientists working remotely. Scientists will largely be able to control this array and collect data remotely from their desktops.

The Array 4 wells will be screened at intervals according to features noted whilst drilling. In order to isolate screened intervals, borehole packers will be required.

### 3.5.4 Scientific instrumentation

The Array 4 scientific instrumentation will comprise:

- Electrical Resistivity Tomography (ERT) cables installed on the outside of the borehole casing, connected to a PRIME Instrument . The ERT sensors comprise metallic electrodes mounted on multi-core cables, each consisting of 40 discrete sensors, which will be used to pass low frequency electrical currents into the ground/soil. Two ERT cables will be installed per borehole (a total of 40 sensors per cable, 80 sensors per borehole).
- Fibre optic cables for Distributed Temperature Sensing (DTS) installed on the outside of the borehole casing. Distributed temperature measurements are primarily required for calibration of ERT imaging data. One fibre optic cable will form a continuous loop down all boreholes of the array such that measurements can be made with the same DTS unit.

The array has been designed to allow flexible deployment of instrumentation including, for example:

- Pressure transducers/loggers to monitor water level
- Submersible pumps, to collect groundwater samples and induce flow
- Multi-parameter groundwater monitoring probes

### **3.5.5 Scientific data acquisition**

The types of data generated from this array will include:

- Geophysical borehole logs
- Core Data
- 3D resistivity data, which can highlight zones of saturation and be used to track injected tracers. Changes in the resistivity profile can also be monitored over time for 4-D characterisation.
- Tracer test results
- Water level data
- Geochemistry data
- Hydraulic flow data
- Permeability data
- Temperature data
- Seismic data

All data collected at the site will be made available to researchers, including future data produced by the science community that may utilise this array.

## **3.6 GROUND MOTION**

### **3.6.1 Overview**

Ground motion monitoring in the Cheshire area is designed to detect the occurrence of any superficial instability (subsidence, uplift or stability) of the target area before, during, and following subsurface activities using Synthetic Aperture Radar (SAR) images, which have been acquired periodically since 1995.



The interferometric processing of the available SAR imagery (InSAR) has been designed to provide displacement measurements at different times with millimetre accuracy over an area of approximately 1,100 km<sup>2</sup>. Two passive and one active InSAR reflector will be installed.

### 3.6.2 Infrastructure

To facilitate calibration and accuracy of the ground motion data, two types of radar reflectors will be installed: passive and active. Passive reflectors are large metal reflectors, usually trihedral in shape, with the open end of the reflector typically orientated towards the satellite line-of-sight. They return the back-scattered electromagnetic radiation, transmitted from the passing satellite, through a double bounce scattering reflection. Active reflectors provide a stronger response to an over passing satellite by increasing the amplitude of the received radar signal.

The installed reflectors provide a location where electromagnetic energy from the ground surface is backscattered and observable by satellite to provide the Synthetic Aperture Radar output. This strong scatterer on the terrain, measured through the Radar Cross Section parameter, facilitates the measurement of terrain deformation from SAR imagery especially where land cover lacks good radar scatterers (in this case marshy land).



**Figure 13 Passive InSAR reflector**

### 3.6.3 Data availability

The data generated from this facility includes:

- InSAR results of the average ground motion and relative time-series
- Geological interpretation of the InSAR data in order to identify the extent and origin of any possible ground movement.

All data collected at the site will be made available to researchers, including future data produced by the science community that may utilise this array.

### 3.7 AIR QUALITY

Air quality monitoring will be undertaken during facility operation, however at the time of writing details of the planned monitoring infrastructure are not yet available beyond the summary provided in Table 2. Air quality monitoring data will be made available to researchers, including data subsequently generated by the science community from information provided.

Proposed Instrumentation	Analytical Measurements
Teledyne UP200 NOx analyzer	Nitrogen Oxides
Thermo Scientific Model 49i Ozone Analyzer	Ozone
Fidas 200 particulate matter monitoring system	Particulates
Thermo Scientific Model 450i Hydrogen Sulfide and Sulfur Dioxide Analyzer	Hydrogen Sulphide
<i>To be confirmed</i>	Methane / CO <sub>2</sub>
Anemometer	Wind speed
Met station	Weather conditions

**Table 2: Analytical outputs from air monitoring programme**

## 4 Physical collections and related data acquisition

### 4.1 OVERVIEW

It is envisaged that a large amount of physical samples and data will be collected during drilling and immediately post drilling. This section reviews the types of samples and data that will be acquired by the UKGEOS programme. Under the terms of the NERC data policy all samples and data that derived from them must be archived within the relevant data repository. The NERC National Geoscience Data Centres (NGDC) and Nation Geological Repository are the designated data centres for deposition of earth science digital data, and physical samples respectively. Both facilities are located at the British Geological Survey at Keyworth.

The data policy states that publicly funded data must be made openly available. However the policy allows of a moratorium period with unique access for scientists to undertake their research



of up to 2 years post acquisition to complete research. After that moratorium period all samples and derived data will be openly available to all scientists. All digital data will be added to the UKGEOS website; data portal as fast as is proactively possible. Digital object identifiers (DOIs) will be issued to some of the data to allow for the tracking of outputs. Scientists that are free to publish this research but this must be on a journal which complies with the UK's open-access publication rules. Thereafter materials and the data therefrom will be available to all researchers who wish to undertake research relating to UKGEOS.

## **4.2 DRILLING DATA**

During drilling, a wide range of operational data will be collected which will vary between arrays. A maximal set may include: driller's logs, leak-off test, drilling parameters, drill fluid logging and when complete, a well deviation survey.

## **4.3 CORE MATERIAL**

Core material is the primary resource for characterising the geology across the study area. The focus on core recovery is acquiring representative core from all encountered stratigraphic sections. This will include: the Quaternary, Permo-Triassic sandstones and underlying Carboniferous succession. The expected stratigraphy of the Carboniferous section consists of: the Warwickshire Group, Pennine Coal Measures Group and Millstone Grit Group.

In total, core will be retrieved from:

- Array 1 - 5 x 100 metres deep boreholes
- Array 2 - 4 x 200 metres deep boreholes
- Array 3 - 1 x 1200 metres deep borehole
- Array 4 - 1 x 600 metres borehole (includes core taken directly through the fault zone) and 3 x 100 metres boreholes.

The core will be sampled for microbiological analysis on site and then returned to BGS Keyworth. To facilitate biological sampling, tracers will be added to drilling fluid to assess contamination of samples. Fluorescent microspheres or other chemical tracers will be used for the assessment of infiltration of drill mud into the sample core.

The core will be logged for lithology and fractures, and described and interpreted. This will provide detailed insight into the stratigraphic evolution of the area and the depositional environments resulting in the lithologies and fluids represented in the subsurface.

Where possible, core will be scanned using the full suite of core scanning equipment documented in the annex below. Physical core will be analysed for a wide range of microbiological, geochemical and geomechanical properties. The core will be made available for researchers to undertake further sampling and analysis. All data will be available openly.

The core material will be stored in the NGR, where it will be available through normal procedures for researchers to view and undertake further sampling/ research.

## **4.4 GEOPHYSICAL WIRELINE LOGGING**

Geophysical logging will provide a framework for geological modelling of the study area. The geophysical log data will allow cross-hole stratigraphic correlation and thus structural correlation

between the cored and drilled boreholes. A suite of geophysical logging techniques will be applied across the study area (outer array), with more detailed logging being undertaken in the deeper boreholes (inner array).

In the outer array, thirteen cased boreholes (3 x 100 metre, 7 x 200 metre and 3 x 300 metre) will be logged with gamma-ray and caliper tools to allow for stratigraphic correlation.

Within the inner array, the 1200 metre and 1 x 600 metre deep wells will be logged using a highly detailed logging suite. Logging tools will include temperature, spectral gamma ray, density/neutron, Laterolog/ induction resistivity suite, full waveform sonic log and 4-arm caliper. In a small subset of wells borehole imaging tools will be run alongside ultrasonic imaging and cement bond logging. In addition, check shots will be undertaken. The logging programme in these wells will be of sufficiently high quality to facilitate a complete interpretation of this succession.

## 5 Data portal

### 5.1 OVERVIEW

The UK Geoenergy Observatories informatics platform (“UKGEOS data portal”) will provide the infrastructure necessary to collect, transmit and store data from the field as well as provide researchers with the necessary tools to discover, access and process such data. It will:

- allow data (real-time or otherwise) collected in the field to be streamed back to scientists and/or web portals
- store scientific data in bespoke databases
- facilitate re-use and sharing of scientific data between scientists
- allow for expansion as demand requires (e.g. allowing data from new experiments to be streamed to the portal)
- be supported long-term by BGS data and system management
- provide access to new facilities such as a suite of state-of-the-art core scanners.

### 5.2 ACCESS TO NEAR REAL-TIME ENVIRONMENTAL BASELINE DATA

The informatics platform will initially be used to transmit near real-time data from environmental monitoring sensors to scientists, businesses and the public through web-based delivery channels. These data will characterise the subsurface around the research facility.

Once research commences, scientists will be able to use this infrastructure to transmit continuous data from their experiments back to the laboratory. Data will be presented publicly via dedicated data portals, providing audience-tailored views including spatial and temporal visualisations as well as search, query and download tools. The portals will be developed in advance of the baseline monitoring taking place so that they can be launched as soon as data streams from the field go live. Links to these new facilities will be published on the BGS website and in other appropriate communication channels.

# Appendix 1: Working at UKGEOS

## OVERVIEW

The UKGEOS Cheshire Energy Research Field Site is open to researchers from the UK and internationally. It will welcome researchers both from academia and from industry. In addition to the observatory described above, the facility offers a range of welfare and science facilities. These are described below.

## WELFARE FACILITIES

Whilst working at the Cheshire Energy Research Field Site, researchers will have access to facilities at Chester University's Thornton Science Park. These facilities include wash facilities, restaurant, office space and connection to the internet and the JANET network.

The site is nearby the villages of Elton and Helsby and to the town of Frodsham. Hotel accommodation is available nearby

## SCIENCE FACILITIES

### Field site laboratory space

Whilst working at the Cheshire Energy Research Field Site, researchers will have access to laboratory and office space at Thornton Science Park (TSP). The laboratory will be equipped with benches, power and water and will provide space where researchers can undertake sample preparation and analysis and prepare and calibrate instruments and other equipment for the field. Laboratory spaces are available to hire directly from TSP.

### Core viewing facilities

Core examination laboratories are available at BGS Keyworth.


## Appendix 2: Core scanning facilities

A new, state-of the art, core scanning facility funded by the UK Geoenergy Observatories programme is available as part of the National Geological Repository (NGR) at Keyworth, Nottingham, UK. The NGR Core Scanning Facility hosts several high-resolution core scanners that allow whole, split, or slabbed rock and sediment cores to be, continuously and non-destructively, scanned before being further processed.

Core scanning provides detailed information on the geophysical, mineralogical, and geochemical characteristics of the core, records core quality and fundamental variations along the core, and allows multiple imaging techniques including high-definition optical, near-infrared (NIR), ultraviolet (UV), and X-radiographic images to be taken.

The following core scanning facilities are available:

**X-ray tomography** – X-ray computed tomography visualises and records internal structures present within the core to determine core quality, structural features, heterogeneity and fracture networks. The rotating source-detector assembly scans in multiple orientation, producing both 2D radiographic core images (“slices”) and 3D reconstructions. A digital rock software package will help users to visualize, process, and rapidly interpret the digital core imagery.

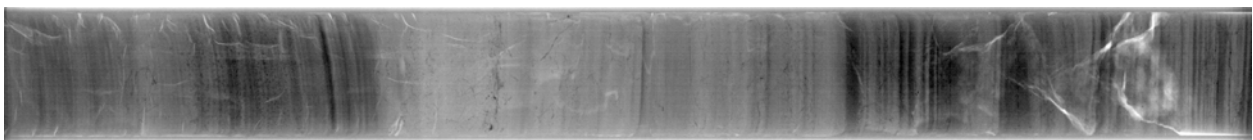


**Figure 14 MSCL-RXCT core scanner and example 2D X-ray radiograph (Geotek MSCL – RXCT)**



**Geophysics and core imaging** – Multi-sensor core logging providing ultra-high definition optical core images and geophysical analyses, including:

- bulk density, porosity, and/or P-wave velocity profiles
- core quality, heterogeneity, identification of sedimentary features and lithological variations (e.g., grain-size, texture, colour) and changes in composition
- core-log integration & correlation between boreholes

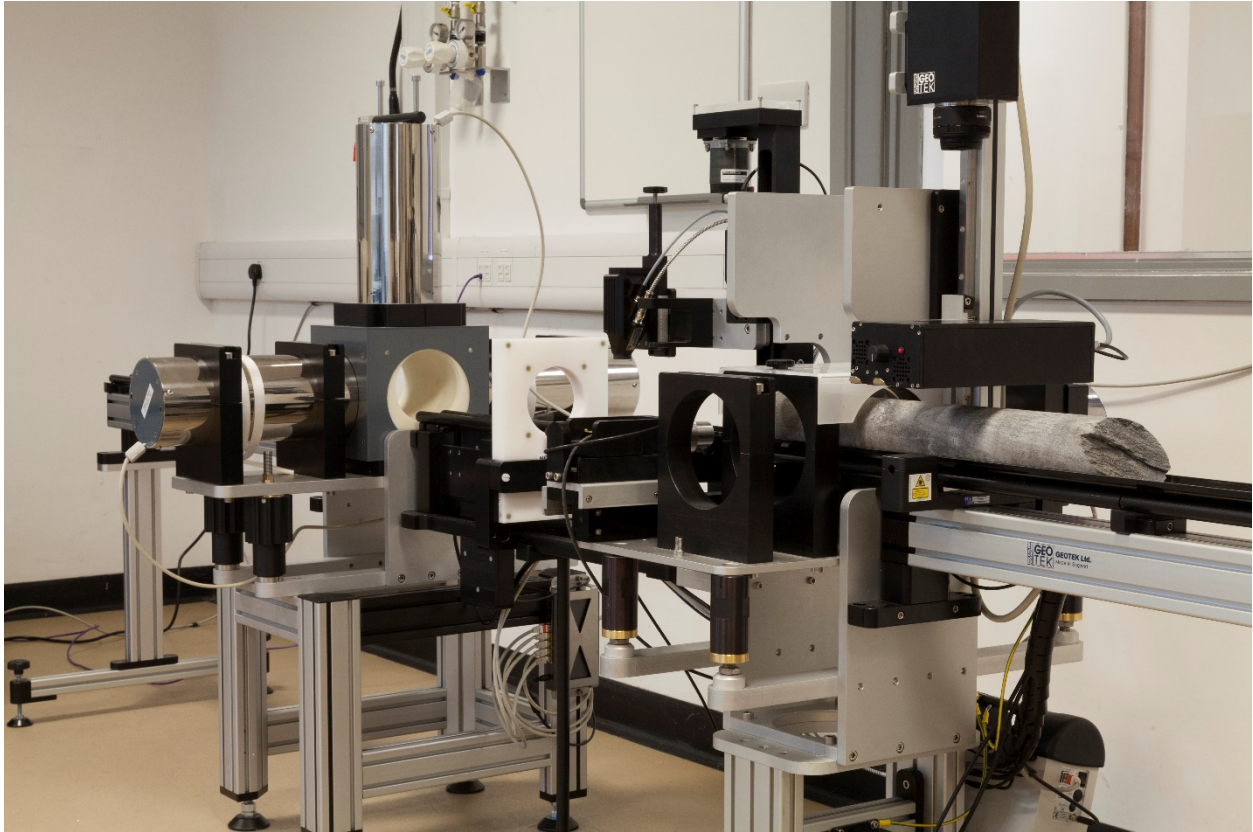

**Figure 15 Multi-sensor core logging scanner (Geotek MSCL-S)**

**Two X-ray fluorescence scanners** – These acquire elemental abundances and variations along core, and can produce 2D XRF maps. Additional colour linescan and UV imaging capabilities provide records of down-core textural/compositional variation. Both XRF core scanners are able to detect a wide range of elements (Mg to U at % and ppm levels) and allow high-spatial resolution scans, down to 0.1 mm. XRF scanning is a well-established, non-destructive method that allows:

- Characterisation of rock and sediment provenances
- Interpretation of mineralogy and matrix properties
- Identification and analysis of fundamental horizons (e.g., bed boundaries)
- Identification of potential element ratio proxies
- Core-to-core and/or core-to-log correlations.



**Figure 16 X-ray fluorescence scanner (Geotek, MSCL-XYZ XRF)**

### **Other Laboratory facilities**

The British Geological Survey at Keyworth have the following facilities:

- [Geochemistry labs](#)
- [Mineralogy, petrology and biostratigraphy](#)
- [Physical property labs](#)

Methodology and eligibility for access to these facilities is still to be determined.

## Appendix 3A: Array 1 Borehole Descriptions

**Table 3: Array 1 Summary borehole metadata and planned sampling**

<b>Array 1: Sampling</b>	<b>Details</b>
<b>Scientific Objective:</b>	Long-term baseline groundwater testing and sensor installation
<b>No of Sites and boreholes per site</b>	9 Sites each with both 1 x 100 m and 1 x 50 m borehole
<b>Expected Lithostratigraphy at TD</b>	50 m boreholes TD in Quaternary, 100 m TD in Sherwood Sandstone Group (Triassic)
<b>Boreholes per site</b>	1 x 100 m, 1 x 50 m boreholes
<b>Likely borehole diameter</b>	13 ½" nominal diameter
<b>Casing Installed: 50 m boreholes</b>	10 ¾" permanent steel casing (6-22 mbGL), 150 mm PVC screened between 43 to 49 mbGL
<b>Casing Installed: 100 m boreholes</b>	11 ¾" permeant steel casing (6-22 mbGL), 150 mm PVC screened between 90 to 99 mbGL
<b>Expected end use</b>	Boreholes remain open for future sampling
<b>Samples available during drilling</b>	Drill cutting collected sporadically
<b>Cored Boreholes</b>	5 X 100 m cored to sample superficial & Permo-Trias geology
<b>Geophysical logs</b>	5 x 100 m boreholes, Gamma-Ray - Caliper (Borehole diameter)
<b>Geomicrobiology sampling</b>	Standard geomicrobiology sampling protocol: 1 sample per 10 m of core in cored boreholes
<b>Gas testing during drilling</b>	Equipment
<b>Fluid testing during drilling</b>	None planned
<b>Fluid Testing Post Drilling</b>	None planned
<b>Pump Testing</b>	Long-term Pump testing
<b>Permanently installed equipment</b>	Automated & telemetered data logging in 6 boreholes

The array will provide environmental baseline data of the groundwater, ground motion and air quality across the study area. The purpose of the proposed groundwater array is to create a new groundwater monitoring network which will allow researchers to get an improved understanding of the groundwater processes within the Cheshire Energy Field Research Site (CERFS) area. These data will form the natural baseline against which future research activity will be compared.

### BOREHOLE COMPONENTS OF ARRAY 1

The array consists of 18 boreholes at 9 separate locations in the broad vicinity of the village of Elton in Cheshire. This allows the sampling of the regional groundwater in the vicinity of the



CERFS research site and also allows the stratigraphy and variability of the Permo-Triassic geology to be more completely understood.

Following completion of the drilling phase a series of pump tests will be undertaken at each borehole location. In addition these boreholes will also be instrumented with continuously recording sensor to allow the borehole steady-state conditions to be monitored remotely over an extended time interval. Combined with outputs from analytical groundwater geochemistry this will produce a laterally and temporally extensive baseline data set.

### ABOVE-GROUND DATA ACQUISITION IN ARRAY 1

Interferometric synthetic-aperture radar (InSAR) ground motion equipment will also be installed across selected sites at the CERFS area. Equipment will be installed at the surface to continuously monitor deformation or shifts in rock mass in the subsurface. Air quality monitoring installations are included as part of the environmental baseline study for the CERFS area. These are designed by (and will be controlled by) Manchester/York Universities and NCAS<sup>1</sup>. These installations will include a range of sensors and instruments to monitor atmospheric gases.

### SUBSURFACE DATA ACQUISITION IN ARRAY 1

The groundwater monitoring wells within this array allow an environmental baseline for groundwater quality to be produced. The baseline will detail various chemical and physical parameters and general groundwater quality through the collection of groundwater samples and continuous automated monitoring, using data loggers and groundwater quality sondes, over an extended period. The sondes will be purchased, installed and maintained by the UK Geoenergy Observatories capital funding.

The array is also designed to allow pumping tests to be undertaken during the operational phase of the wells. This will help to characterise how the groundwater flows and behaves across the region.

**Table 4: Array 1 List of borehole codes and site locations (Cored boreholes in Bold)**

Location	100 m BH	Cored	50 m BH
SITE A	TH0407		TH0420
SITE B	<b>TH0101</b>	TH0101	TH0102
SITE C	<b>TH0107</b>	TH0107	TH0108
SITE D	<b>TH0116</b>	TH0116	TH0117
SITE E	<b>TH0122</b>	TH0122	TH0123
SITE F	<b>TH0125</b>	TH0125	TH0126
SITE G	TH0128		TH0129
SITE K	TH0110		TH0111
SITE N	<b>TH0104</b>	TH0104	TH0105

**Table 5: Array 1 planned hydrogeochemical sampling: summary of intended sample types**

Sample Type	Treatment	Sample Container	Analysis Possible
FA 30 ml	Filtered acidified with HNO <sub>3</sub> to 1%	30 ml LDPE	ICP AES, Na, K, Ca, Mg, SO <sub>4</sub> , Si, Al, B, Ba, Be, Cd, Co, Cr, Cu, Fe <sub>total</sub> , La, Li, Mn, Ni, Mo, Pb, P <sub>total</sub> , Sc, Sr, V, Y, Zn, Zr, As, Se, ICP MS suite
FUA 60 ml	Filtered, unacidified	60ml LDPE	Cl, F, Br, I, NO <sub>2</sub> , NO <sub>3</sub> , TON, NH <sub>4</sub> (SO <sub>4</sub> , PO <sub>4</sub> )
FUA 30 ml NH <sub>4</sub>		30 ml LDPE	Ammonium
FUA 30 ml As			Arsenic
NPOC	Silver filtered, unacidified	14ml foil capped glass vial	Dissolved Organic Carbon
δ <sup>18</sup> O/ δ <sup>2</sup> H	Filtered, unacidified	60 ml HDPE	Oxygen and Deuterium
δ <sup>13</sup> C		100 ml HDPE	Carbon Isotopes
Dissolved gases	Unfiltered, unacidified	Gas Sampling Bomb	Dissolved gases
CFCs		Small Amber Bottle	CFCs
SF <sub>6</sub>		Clear Glass Bottle	SF <sub>6</sub>
SVOCs		1 x Green Bottle 2 x Glass Vials	SVOCs
NORM		1L Glass Amber Bottle	NORMS
Tritium		1L Glass Amber Bottle	Tritium ( <sup>3</sup> He)
S Isotopes		250 ml Nalgene	Sulphur Isotopes
Radon Daughters		Nalgene pots	Radon Daughters
Radon		60 ml HDPE	Radon (Rn) (Triathler)
Organic micropollutants		2 x 1 L PTFE Lined Bottles	GCMS/LCMS

PAHs		1 x 1 L PTFE Lined Bottles	PAHs
VOCs		1 x 250 ml plastic bottle	Chlorinated hydrocarbons, BTEX

○

**Table 6: Array 1 Non-geochemical sampling (Groundwater Baseline)**

Type	Data Collection	Data Produced/Possible	Status
Pumping Tests	Step Drawdown	Well efficiency, critical pumping rate, optimum pumping rate	Operational details to be confirmed
	Constant Rate	Transmissivity (hence hydraulic conductivity), storage coefficient, aquifer response	
	Constant Head	Transmissivity (hence hydraulic conductivity)	
InSA R	Ground level monitoring	Baseline of ground level stability	Confirmed

Special sample handling procedures that will be adopted:

- One sample will be acidified in the field
- The majority of samples will be filtered
- Samples will be refrigerated in the field using ice packs/ice and kept in cold stores over the weekend before shipping to labs
- There is scope to keep some samples in the cold store for testing at a later date
- Further parameters need to be further examined including long-term storage requirements

## Appendix 3B: Array 2 Borehole Descriptions

**Table 7: Array 2 Summary borehole metadata and planned sampling**

<b>Array 2: Seismic Baseline</b>	
<b>Scientific Objective:</b>	Seismic monitoring network that detects very small earthquakes (-0.6 to -1.0 Magnitude)
<b>No of Sites</b>	10 sites each with 1 borehole (some co-located with Array 1)
<b>Expected Lithostratigraphy at TD</b>	Sherwood Sandstone Group (Triassic)
<b>Boreholes per site</b>	1 per site: 7 x 200 m deep, 3 x 300m
<b>Casing Installed</b>	PVC casing
<b>Expected end use</b>	Seismometers / sensors installed in boreholes then sealed
<b>Samples available during drilling</b>	Drill cutting collected sporadically
<b>Cored Boreholes</b>	4 x 200 m boreholes also cored
<b>Geophysical logs</b>	3 x 300 m, 7 X 200 m boreholes: Gamma-Ray - Caliper (Borehole diameter)
<b>Geomicrobiology sampling</b>	Standard geomicrobiology sampling protocol: 1 sample per 10 m of core in cored boreholes
<b>Gas testing during drilling</b>	Boreholes not equipped for gas testing
<b>Fluid testing during drilling</b>	None planned
<b>Fluid Testing Post Drilling</b>	None planned
<b>Pump Testing</b>	None planned
<b>Permanently installed equipment</b>	10 seismometers installed in boreholes then sealed, 3 x DAS fibre optics

The purpose of the proposed seismic array is to establish a new seismic monitoring network which will allow researchers to get an improved understanding of the seismic activity within the Cheshire Energy Field Research Site (CERFS) area. These data will form the natural baseline against which future seismic activity will be compared and contrasted.

### MONITORING COMPONENTS OF ARRAY 2

The baseline seismic monitoring array will consist of 13 seismic sensors in 10 boreholes with an average spacing of 1 km, along with three strings of fibre optic cables configured for distributed acoustic sensing (DAS). These are distributed across a 4km by 4km area, centred on the proposed zone of subsurface anthropogenic activities in the Ince Marshes area, and the defining geological structure of the area. An additional seismometer will be installed at the base of the “Deep Well” (Array 03). The components parts of the array are:

- 3 boreholes, each with a planned total depth (TD) of 300 metres dependent on drilling conditions. Each borehole will be instrumented with two seismometers, one at 200

metres and one at 300 metres depth. All of these 300 metre boreholes will have fibre optic cables installed on the outside of the casing, which will be used for Distributed Acoustic Sensing (DAS) applications.

- 7 boreholes, each with a planned total depth of 200 metre dependent on drilling conditions, instrumented with one seismometer at 200 metre.
- 1 seismometer to be installed at the base of the Array 3 1200 metre deep borehole.

Each seismometer (Guralp Radian broadband) will record 3-component acceleration data at 1000 Hz. This data will be transmitted in real time using Guralp's GCF protocol to be archived at the BGS. Complimentary metadata will be maintained as part of the archive. The installed fibre optic cables will provide the facilities for future DAS measurements/interrogation to take place. The DAS unit will be supplied externally, and will not be installed on site.

**Table 8: Array 2 List of borehole codes and site locations (Cored borehole in Bold)**

Location	200 m	300 m	Cored
SITE D	TH0204		
SITE E		TH0215	
SITE F	TH0218		
SITE H	<b>TH0202</b>		Yes
SITE I	<b>TH0209</b>		Yes
SITE J		TH0210	
SITE K	<b>TH0212</b>		Yes
SITE L		TH0214	
SITE M	<b>TH0216</b>		Yes
SITE N	TH0220		



## Appendix 3C: Array 3 Borehole Description

**Table 9: Array 3 Summary borehole metadata and planned sampling**

<b>Array 3: Deep Borehole</b>	<b>Description</b>
<b>Scientific Objective:</b>	Drilling of Permo-Trias succession & fault, coring of Carboniferous succession and installed of seismic monitoring and geophysical equipment
<b>No of Sites</b>	1 (co-located with Array 4)
<b>Expected Lithostratigraphy at TD</b>	Carboniferous Millstone Grit Formation
<b>Boreholes per site</b>	1 x 1200 mbGL
<b>Casing Installed</b>	Conductor 0 -30 mBGL, Permanent steel Casing to 428 mbGL (to achieve complete zonal isolation for aquifers)
<b>Expected end use</b>	Long Term Seismic Monitoring
<b>Samples available during drilling</b>	Drill cutting collected sporadically
<b>Cored Boreholes</b>	Continuous coring for 428 -1200 m, likely 85 / 102 mm core diameter (TBC)
<b>Geophysical logs: Run 1</b>	0-425 M: Neutron-Density-Spectral Gamma Ray, P&S wave, Resistivity (+ potentially Cross-dipole sonic)
<b>Borehole Imaging Run 1</b>	0-425 M: High-resolution resistivity borehole imaging + inclinometry
<b>Geophysical logs: Run 2</b>	425 -1200 M: Neutron-Density-Spectral Gamma Ray, P&S wave, Resistivity (+ potentially Cross-dipole sonic) Casing Inspection Logs (Cement Bond Log / Ultrasonic Imager)
<b>Borehole Imaging Run 2</b>	425 -1200 M: High-resolution resistivity borehole imaging + inclinometry
<b>Drilling parameters</b>	Drilling data parameters & Extended leak-off test
<b>Geomicrobiology sampling</b>	Standard geomicrobiology sampling protocol: 1 sample per 10 m of core in cored boreholes
<b>Gas testing during drilling</b>	MFDT / RFT Pressurised fluid & gas sampling
<b>Fluid testing during drilling</b>	MFDT / RFT Pressurised fluid & gas sampling
<b>Fluid Testing Post Drilling</b>	None possible with borehole completion
<b>Pump Testing</b>	None possible with borehole completion
<b>Permanently installed equipment</b>	Guralp seismometer, DAS fibre optic cable & resistivity tomography to base casing

### INTENDED PURPOSE OF ARRAY 3

The purpose of the proposed deep well is to characterise geological sequence in the area of the Ince Marshes horst block and is designed to allow long-term seismic monitoring of these formations for the life of the project from the Quaternary through to the Carboniferous Millstone Grit Group.

Within the CERFS, Array 3 gives the single opportunity to obtain information relating to the Carboniferous Millstone Grit, Coal Measures and lower part of the Warwickshire Group bedrock strata. These rocks represent potential barriers between exploration targets for PEDL licence holders in this and adjacent areas, although have been faulted over geological time; they have also been explored in the past for coal-bed methane. As such, characterisation of these rocks is considered important to a range of potential innovative geoenergy technologies that may form topics of research projects as part of the broader UK Geoenergy Observatory aims.

The array will generate a dataset of drilling data, wireline log data (including image logs) and core as well as gas and drilled cuttings data. In combination these will allow for detailed studies of rocks which are often poorly characterised as a foundation for future research. The data will be relevant to furthering understanding from this site, but also add value to existing datasets from the region, including other deep borehole core, downhole log data, and released 2D and (not-yet released) 3D seismic data .

The well will be drilled in proximity to Array 4 (Multiscale) and potentially can be co-opted to service multiscale experimentation.

### COMPONENTS OF ARRAY 3

The array will consist of a single vertical borehole that will penetrate the Quaternary superficial deposits, the Permo-Triassic and some Carboniferous formations reaching total depth, estimated at 1200m (TD) in the upper part of the Carboniferous Millstone Grit. The Permo-Triassic succession will be open hole drilled and then logged using wireline geophysical logging tools. This section will then be fully cased through the lower bounding fault to achieve zonal aquifer isolation. Both electrical resistivity tomography and fibre optic cables will be permanently installed behind the casing.

Following the completion of the drilling to TD, geophysical logging (including borehole imaging) and fluid / gas sampling of the total borehole section will be undertaken. On completion of these activities a single seismometer will be inserted at TD and the borehole backfilled with engineered cement.

The components parts of the array are:


- A borehole approximately 1200m Total Depth (TD) in the Carboniferous Millstone Grit.
- Fibre Optic cable installed on outside of the casing(s) for Distributed Temperature Sensing (DTS) and Distributed Acoustic Sensing (DAS).
- A single seismometer installed in the base of the borehole for the detection of seismic activity.

### DATA ACQUISITION IN ARRAY 3

Key data acquisition phases in this borehole, includes core recovery, geophysical wireline logging and borehole imaging. Pressurised fluid / gas samples will be acquired using wireline formation

testing tools such as the Repeat Formation Tester and the Module Dynamics Tester. Depending upon the specific contractor and equipment used (to be confirmed) samples of specific intervals will be recovered at in-situ pressure allowing accurate quantification of the subsurface fluids and gas composition.

**Figure 17 Array 3 Borehole construction / casing options and prognosis**

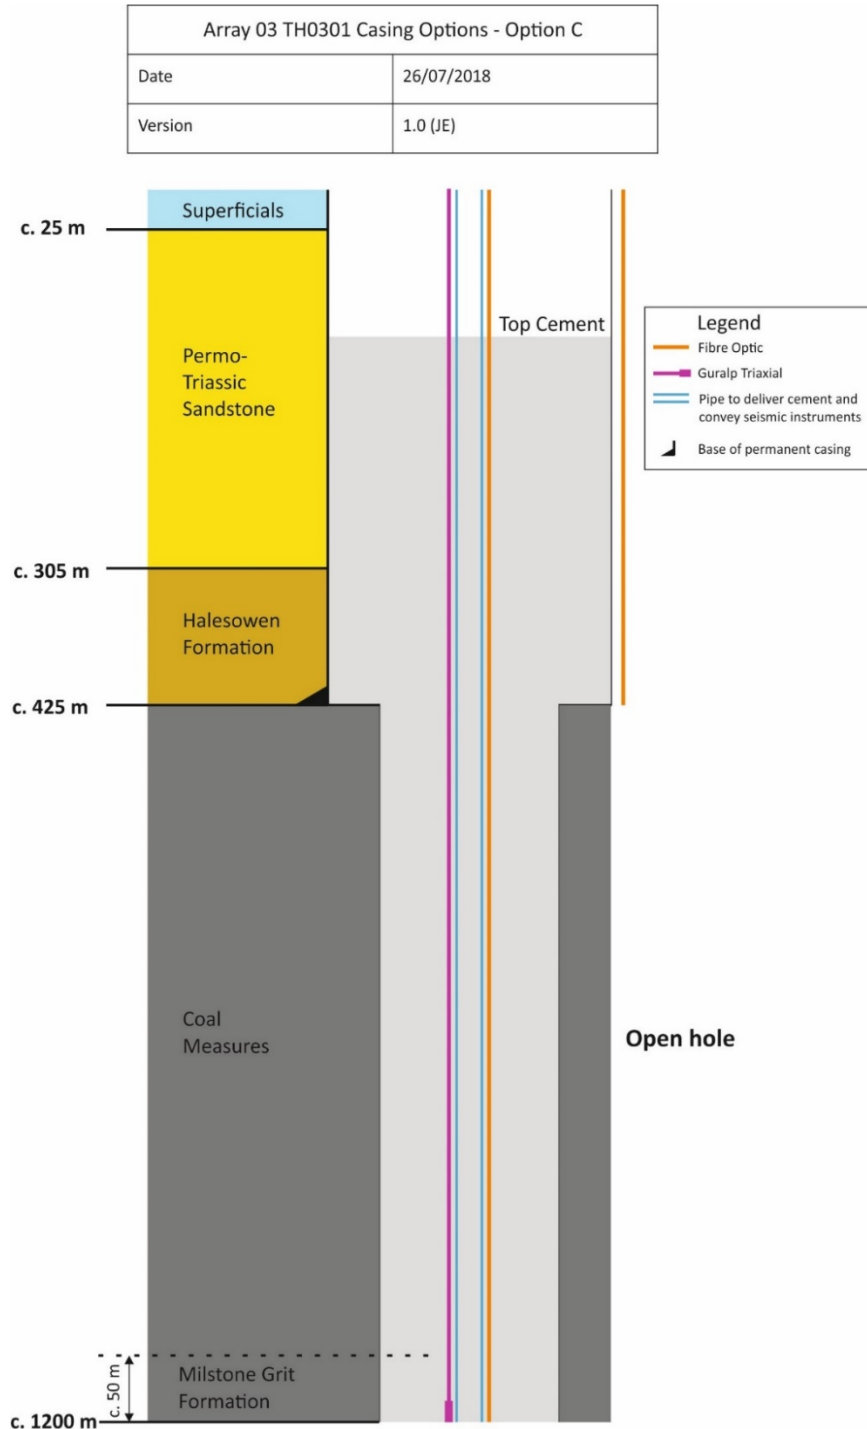

## Appendix 3D: Array 4 Borehole Descriptions

**Table 10: Array 4 Summary borehole metadata and planned sampling**

<b>Array 4: Multi-scale array</b>	<b>Description</b>
<b>Scientific Objective:</b>	Multi-scale experimental site for quantification of groundwater properties and geological characterisation of the Permo-Trias succession. This will include: identifying the location of the intersection of the Dungeon Bank Fault and the Role of faults as a barriers/pathways to fluid / gas migration
<b>No of Sites</b>	1
<b>Expected Lithostratigraphy at TD</b>	Quaternary / Triassic Sherwood Sandstone Group (SSG) for 50 m boreholes, SSG for 100 m boreholes, Upper Carboniferous (Warwickshire Group or Pennine Upper Coal Measures Group) for 600 m boreholes
<b>Boreholes per site</b>	8 x 50 m, 12 x 100 m, 3 X 600 m
<b>Casing Installed</b>	Steel casing installed in top section of 600 m boreholes
<b>Expected end use</b>	Multi-scale experimental site
<b>Samples available during drilling</b>	Drill cuttings collected sporadically
<b>Cored Boreholes</b>	1 x 600 m 3 x 100 m
<b>Geophysical logs: Run 1</b>	1 x 600 m well: near-oilfield log suite (Density-neutron-spectral-gamma, P&S wave sonic, resistivity, SP), 2x 600 m well : gamma ray -caliper (borehole diameter)
<b>Borehole Imaging: Run 1</b>	Medium-high resolution resistivity logging in core 600m well or acoustic imaging in 1 x 600 m boreholes
<b>Geophysical logs: Run 2</b>	1 x 600 m well: near-oilfield log suite (Density-neutron-spectral-gamma, P&S wave sonic, resistivity, SP), 2 x 600 m well : gamma ray -caliper (borehole diameter) + casing inspection tools (Cement bond log + ultrasonic imager)
<b>Borehole Imaging: Run 2</b>	Medium-high resolution resistivity logging in core 600m well or acoustic imaging in 1 x 600 m boreholes
<b>Drilling parameters</b>	Potentially recording of drilling parameters
<b>Geomicrobiology sampling</b>	Standard geomicrobiology sampling protocol: 1 sample per 10 m of core in cored boreholes
<b>Gas testing during drilling</b>	None Planned
<b>Fluid testing during drilling</b>	None Planned

<b>Fluid Testing Post Drilling</b>	Baseline conditions & after pressure injection experiments
<b>Pump Testing</b>	Multiple cycles planned for experimental array, details to be confirmed
<b>Permanently installed equipment</b>	Cross-borehole and surface-borehole 2D and 3D geoelectrical imaging (electric resistivity tomography) array; Time-lapse imaging of fluid processes in the near surface including natural and induced changes

## COMPONENTS OF ARRAY 4

The multi-scale array will enable hydrogeological and hydrogeophysical characterisation of the rock mass from surface to experimental borehole depth. It will allow subsequent investigation of hydraulic, geophysical and geochemical processes at multiple scales (space and time), particularly in response to changes induced by controlled experiments.

Whilst drilling will be completed in Array 4 during the delivery phase of CERFS, this array is intended to continue to operate for an extended period allowing multiple future opportunities for the hydrogeology to be characterised by repeated hydrogeochemical and geophysical sampling.

## DATA ACQUISITION IN ARRAY 4

Data, primarily wireline and core data, will be collected through the drilling and construction process. Electrical Resistivity Tomography (ERT) sensor cables as well as DAS / DTS fibre optic cables will be installed down the back of the casing. The metal casing will require electrical isolation from the lithology. The purpose of the fibre optic cables will be to obtain high resolution temperature data to help calibrate ERT electrical imaging data.

The well will be completed to allow future installation of various downhole probes, including but not limited to seismic, pressure and temperature sensors. Screened casing sections may be incorporated to provide hydraulic access to permeable geological units for future hydrogeological and hydrogeophysical experimentation.

**Table 11: Array 4 List of borehole codes and site locations (Cored boreholes in Bold)**

Location	50 m	100 m	Upto 600m	Cored
Site A			TH0401	
Site A			TH0402	
Site A			<b>TH0403</b>	Yes
Site A		TH0404		
Site A		<b>TH0405</b>		Yes
Site A		TH0406		
Site A		TH0407		
Site A		TH0408		
Site A		TH0409		
Site A		TH0410		
Site A		TH0411		



Site A		<b>TH0412</b>		Yes
Site A		TH0413		
Site A		TH0414		
Site A		<b>TH0415</b>		Yes
Site A	TH0416			
Site A	TH0417			
Site A	TH0418			
Site A	TH0419			
Site A	TH0420			
Site A	TH0421			
Site A	TH0422			
Site A	TH0423			

Repeated water sampling and pump testing is intended for Array 4 into the future but precise protocols are yet to be defined so sampling opportunities of these materials cannot be provided at this time.

## References

British Geological Survey holds most of the references listed below, and copies may be obtained via the library service subject to copyright legislation (contact [libuser@bgs.ac.uk](mailto:libuser@bgs.ac.uk) for details). The library catalogue is available at: <https://envirolib.apps.nerc.ac.uk/olibcqi>

British Geological Survey, 2018. 3D model of the Quaternary deposits <http://www.bgs.ac.uk/downloads/start.cfm?id=3181>.

Burke, H F, Gow, H V, Cripps, C, Thorpe, S, Hough, E, Hughes, L, and Horabin, C G. 2016. [The 3D Quaternary geology of the area around Thornton, Cheshire](#). *British Geological Survey report OR/16/056*, 25pp.

Fellgett, M.W, Kingdon, A, Williams, J D O, and Gent, C.M.A. 2017. [State of stress across UK Regions](#). *British Geological Survey report OR/17/048*, 60 pp.

Griffiths, K, Shand, P, and Ingram, J. 2002. [Baseline report series. 2, the Permo-Triassic sandstones of west Cheshire and the Wirral](#) Environment Agency, 52pp. (CR/02/109N)

Hannis, S, and Gent, C. 2017. [Petrophysical interpretation of selected wells near Liverpool for the UK Geoenergy Observatories project](#). *British Geological Survey report OR/17/037*, 44pp

Lee, J R, and Hough, E. 2017. [A conceptual geological model for investigating shallow subsurface geology, Thornton-le-Moors, Cheshire](#). *British Geological Survey report OR/17/042*, 43pp.

Monaghan, A.A.; Starcher, V.; O Dochartaigh, B.; Shorter, K.; Burkin, J.. 2018 [UK Geoenergy Observatories: Glasgow Geothermal Energy Research Field Site: science infrastructure](#). Nottingham, UK, British Geological Survey, 46pp. (OR/18/037) (Unpublished)