



Horizontal and radial collector wells: simple tools for a complex problem

Sarah L. Collins¹ · Georg J. Houben²

Received: 26 July 2019 / Accepted: 14 January 2020 / Published online: 30 April 2020
© British Geological Survey 2020

Abstract

The capture of groundwater by horizontal wells (HWs) is an old but often overlooked technique. Practically all modeling techniques available in groundwater hydrology have been applied to HWs. This work compares analytical models with field data and investigates the influence of nonuniform screen inflow. The usefulness of a vertical well approximation is studied. A new MATLAB application, HORI, is presented for common analytical models. Analytical methods are found to reproduce drawdown around two radial collector wells (RCWs). Beyond the direct vicinity of the caisson, in particular, drawdown around an RCW can be approximated with a vertical well model.

Keywords Water well · Well hydraulics · Radial collector well · Horizontal well

Introduction

The capture of groundwater by horizontally arranged screens is an old but often overlooked technique, as most textbooks focus on the much more common vertical wells. Horizontal wells (HWs), including radial collector wells (RCWs), covered drainage trenches and horizontal directionally drilled wells, are, from a hydraulic and economic point of view, an interesting alternative to vertical wells for a variety of hydrogeological situations, e.g. in thin aquifers. The focus here is RCWs pumping groundwater, although many developments of horizontal well techniques and models come from the oil industry.

RCWs are generally comprised of a vertical reinforced concrete shaft (caisson) with horizontal well screens (laterals) projected out into the aquifer (Fig. 1). During operation, groundwater enters the well through the slots in the laterals and flows into the caisson, where one or more pumps are installed.

Collector wells are more expensive to build than vertical wells, but offer many benefits: practical experience and models have shown that collector wells distribute drawdown over a larger area than equivalent vertical wells and thus produce significantly smaller maximum drawdown (e.g. Huang et al. 2012), fouling of the well screen occurs at a much slower rate, and wells need less frequent cleaning. Collector wells are often used to induce recharge from surface water bodies and are installed close to rivers (Fig. 1), in some cases with laterals that extend beneath the river.

Practically all modeling techniques available in groundwater hydrology have been applied to HWs. Physical sandtank models of RCWs were constructed by Falcke (1962), Kotowski (1982, 1983, 1985, 1988), Chen et al. (2003), Birch et al. (2007) and Kim et al. (2008), of which the earlier studies derived empirical models which were upscaled to field dimensions. Kordas (1961), Milojevic (1961, 1963) and Debrine (1970) used electrical analog models. A myriad of analytical models exist, from the earliest models by Forchheimer (1886) and Polubarinova-Kochina (1955), to models adapted from vertical wells (e.g. Nöring 1953) and, finally, more recent models for predicting drawdown in anisotropic aquifers (e.g. Hunt 2005), well bore storage (e.g. Zhan and Park 2003) or interaction with surface water (e.g. Huang et al. 2011, 2012, 2015; Sun and Zhan 2006). Analytical element models of RCWs were developed by Patel et al. (2010) and Bakker et al. (2005). Several authors have

✉ Sarah L. Collins
sarcol@bgs.ac.uk

¹ British Geological Survey, The Lyell Centre, Edinburgh EH14 4AP, UK

² Federal Institute for Geosciences and Natural Resources (BGR), Hannover, Germany

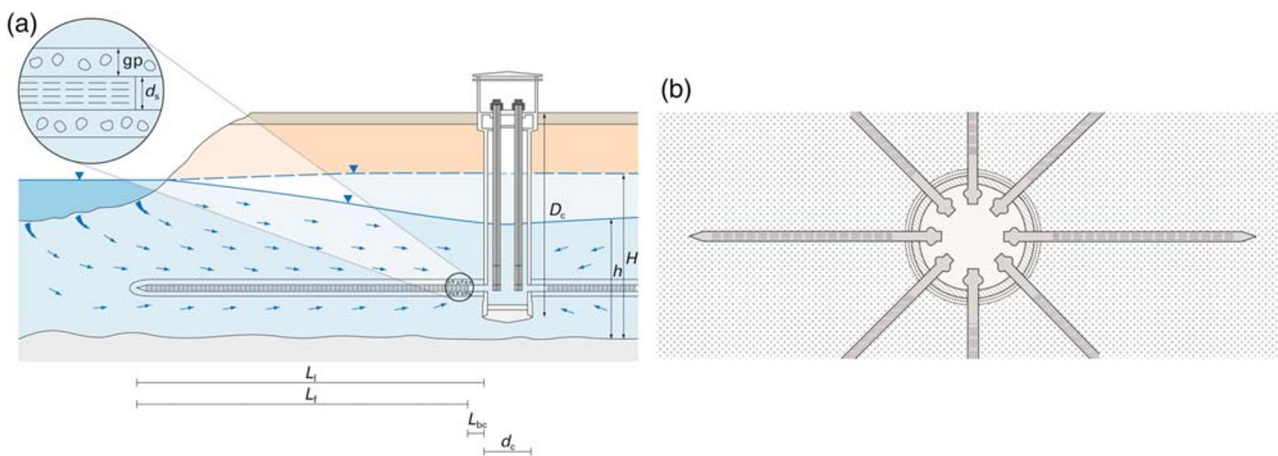


Fig. 1 **a** Cross-section and **b** plan view of a radial collector well. L_t , L_f , L_{bc} are total, screened and closed lateral length, respectively; d_c diameter of the caisson; D_c caisson depth; g_p gravel pack thickness; d_s diameter of lateral; H static head; h pumped head (©BGR)

computed numerical models of flow around RCWs (Bischoff 1981; Ophori and Farvolden 1985; Eberts and Bair 1990; Beljin and Lososky 1992; Zhan et al. 2001; Cunningham et al. 1995; Luther and Haitjema 1999; Mohamed and Rushton 2006; Birch et al. 2007; Haitjema et al. 2010; Lee et al. 2010; Dimkić et al. 2011; Kelson 2012), of which some went beyond the classical assumption of linear laminar Darcy flow and included nonlinear laminar (Forchheimer) and turbulent flow.

The aim of this work is not to review all of these techniques (for a review, see Huang et al. 2012; Yeh and Chang 2013). Instead, the focus is two widely used analytical solutions for an infinite aquifer and the vertical well approximation, in comparison with field observations. The first analytical model (Hantush and Papadopoulos 1962) is the most cited and one of the oldest in the literature, and the second (Williams 2013) is newer and less cited, but simple to apply. To the authors' knowledge, the only comparison of an analytical model with field data in the literature is that of Huang et al. (2012), who compared their analytical model of an RCW next to a river with data from two pumping tests. They found a reasonably good agreement to their model in the caisson and in a single piezometer 20 m from the caisson, but poorer agreement in a second piezometer (>100 m from caisson), which they attributed to heterogeneities in the aquifer. There are also a few examples of field data being compared with more complex, numerical models able to incorporate turbulent flows in the laterals: Lee et al. (2012) were able to reproduce groundwater levels in a single piezometer during a pumping test carried out in an RCW next to a river and Mohamed and Rushton (2006) successfully modelled groundwater level in a number of piezometers around an HW in a shallow aquifer. In

this study, a dense network of piezometers in the direct vicinity of two RCWs is used and flowmeter data from inside a lateral to investigate the applicability of more simple analytical models. Analytical models are often viewed with a degree of skepticism and rejected in favor of more complex, numerical models. Numerical models offer flexibility—for example, in assigning boundary conditions or including geological heterogeneity—which analytical models cannot represent. However, the ease with which analytical models can be applied means that they should not be overlooked. Here, the aim is to show how far the analytical approach can be simplified and address whether the main assumption of many analytical models—that of uniform flux along the lateral—is reasonable. The latter aim is approached by comparing the results of solutions using different boundary conditions against flowmeter data from inside a lateral with numerical models.

Methodology

Analytical models

The most frequently cited analytical model is that of Hantush and Papadopoulos (1962). They represented the laterals as line sinks of uniform discharge, just as partially penetrating vertical wells had been treated previously (e.g. Hantush and Jacob 1955; Hantush 1957). Further assumptions include a limited drawdown ($s < 0.25 H_0$), a small percentage of water release due to aquifer compaction, and that the caisson radius is significantly smaller than the lateral length ($r_c \ll L_t$). The drawdown for the i th of a group of i laterals after a long time of pumping—quasi steady state, valid for $t > 2.5 b^2/v'$ and $t > 5 (r^2 + L_i^2)$ —is then:

$$s_i = \frac{Q_i/L_i}{4 \pi K b} \left\{ \begin{aligned} &\alpha W\left(\frac{\alpha^2 + \beta^2}{4v't}\right) - \delta W\left(\frac{\delta^2 + \beta^2}{4v't}\right) + 2L_i - 2\beta \left(\tan^{-1} \frac{\alpha}{\beta} - \tan^{-1} \frac{\delta}{\beta}\right) \\ &+ \frac{4b}{\pi} \int_{n=1}^{\infty} \frac{1}{n} \left[L\left(\frac{n\pi\alpha}{b}, \frac{n\pi\beta}{b}\right) - L\left(\frac{n\pi\delta}{b}, \frac{n\pi\beta}{b}\right) \right] \cos \frac{n\pi z}{b} \cos \frac{n\pi z_i}{b} \end{aligned} \right\} \tag{1}$$

with

$$\alpha = r \cos(\theta - \theta_i) - r_c' \tag{2}$$

$$\beta = r \sin(\theta - \theta_i) \tag{3}$$

$$\delta = r \cos(\theta - \theta_i) - l' \tag{4}$$

$$r = \sqrt{x^2 + y^2} \tag{5}$$

$$l' = r_c' + L_i \tag{6}$$

$$r_c' = r_c + L_{bc} \tag{7}$$

$$v' = \frac{K b}{S_y} \tag{8}$$

$$L(a, \pm b) = -L(-a, \pm b) = \int_0^a K_0\left(\sqrt{b^2 + y^2}\right) dy \tag{9}$$

$$W(u) = \int_u^{\infty} \frac{e^{-y}}{y} dy \tag{10}$$

where K is hydraulic conductivity [$L T^{-1}$], Q_i is pumping rate of i th lateral [$L^3 T^{-1}$], L_i is the length of the screened section of the i th lateral [L], L_{bc} is the length of the closed section of the i th lateral [L], b is the thickness of a confined aquifer or initial water-saturated thickness of an unconfined aquifer [L], S_y is specific yield, r_c is the radius of the caisson [L], N is the number of laterals, n is an integer counter (1, 2, 3, 4, ...), r, z, θ are cylindrical coordinates (z positive downwards), r_i, z_i, θ_i are cylindrical coordinates of the i th lateral, x, y, z are rectangular coordinates, t is time since the start of pumping [T] and $K_0(u)$ is the zero-order modified Bessel function of the second kind. $W(u)$ is the well function (Theis 1935) and can be approximated by

$$W(u) = -0.5772 - \ln u + u^{-2} \times \frac{1}{2 \times 2!} + \frac{u^3}{3 \times 3!} - \frac{u^4}{4 \times 4!} + \dots \tag{11}$$

With $z = 0$, the approximate drawdown of the piezometric surface is obtained. The 2D solution for average drawdown is derived by integrating with respect to z over the aquifer thickness and dividing by the aquifer thickness. The result is Eq. (1) without the integral term. At a distance from the center of the caisson $r \geq (r_c + L_i + b)$, the 2D and 3D solutions converge, as the integral in Eq. (1) approaches zero.

An elegantly simple analytical model was devised by Williams (2013), who distributed the total discharge, Q , of a lateral over a number of i point sinks (with Q_i each) along the vertical projection of the well screen. The calculated transient drawdown represents that which would be measured in a fully penetrating observation well. The result is thus a 2D drawdown

field, unlike the Hantush and Papadopoulos (1962) model, with which drawdown can be calculated for any horizontal plane through the aquifer. The approach not only simplifies the calculation of drawdown around an HW/RCW dramatically, but also makes it easy to model wells of any shape, e.g. slant wells of which the horizontal and vertical well are just special cases. The approach has the additional advantage that it is not restricted to a uniform-flux boundary condition, i.e. the point sink strength could be adapted to mimic nonuniform inflow. In practice, however, it is unlikely that flowmeter data from inside the laterals would be available. For the individual point sinks, Williams (2013) adapted the Cooper and Jacob (1946) equation for transient flow to a fully penetrating vertical well:

$$s = \frac{2.3 Q}{4 \pi K b} \log\left(\frac{2.25 K b t}{S}\right) - \left(\frac{2}{n_s}\right) \log(RP_1 \times RP_2 \times RP_3 \times \dots \times RP_{n_s}) \tag{12}$$

where n_s is the number of point sinks along the vertical projection of the well screen and RP_x is the distance from an (arbitrary) observation point to point sink x [L]. It should be noted that Eq. (12) is valid under the same assumptions and simplifications as the Cooper and Jacob (1946) approximation. The goodness of fit of this model to the more explicit Hantush and Papadopoulos (1962) solution depends on the number of point sinks employed.

Even simpler than the approach of Williams (2013) is the “ersatzradius” method (*ersatz* is German for replacement) adapted from analytical models developed for fully penetrating vertical wells. The so-called “ersatzradius” (analogous or equivalent well radius) was defined to replace the length of the HW, defined by the extension of its laterals, by an equivalent, fully penetrating vertical well. The drawdown around the HW in a confined aquifer at steady state is then given by the Thiem (1870) equation, assuming horizontal, radially symmetric flow in an isotropic island aquifer:

$$s = \frac{Q}{2 \pi K b} \ln\left(\frac{r_0}{r_w}\right) \tag{13}$$

where r_0 is the radius of the cone of depression (i.e. radial distance from the well center to a location where drawdown is zero [L]). r_w is the radius of the (analog) well [L] and is defined as follows:

$$r_w = F_c L_1 \tag{14}$$

where F_c is a correction factor for the ersatzradius [L] and L_1 is the (average) length of the laterals [L]. Nöring (1953) proposed:

$$r_w = 0.66 \frac{\sum L_l}{n_l} \quad (15)$$

where n_l [–] is the number of laterals. Correction factors, F_c , suggested in the literature vary between 0.61 and 0.8 (Mikels and Klaer 1956; Hantush and Papadopoulos 1962; McWhorter and Sunada 1977).

Alternatively, drawdown around an RCW can be approximated with a vertical well equation without a correction factor. Hantush (1964) stated that at a distance of $r > 5 (r_c + L_l)$ from an RCW of at least two laterals, drawdown can be described with the Theis (1935) equation without correction. An advantage of this method over the Thiem method is that it allows for transient conditions.

$$s = \frac{Q}{4 \pi K b} W \left(\frac{r^2 S}{4 K b t} \right) \quad (16)$$

Field data

The Fuhrberger Feld is a rural area located in northern Germany, 30 km north-east of the city of Hanover. Besides agriculture and forestry, the Fuhrberger Feld is used to produce groundwater for the drinking water supply of Hanover. The Quaternary aquifer consists of unconsolidated, mostly sandy sediments with a thickness of 20–30 m, with interspersed thin layers of interglacial silts. The base of the aquifer consists of clay and glacial till. Depth to groundwater varies annually between approximately 0.5 and 2.5 m below ground. The hydraulic conductivity of the aquifer is approximately 45 m/day and its porosity is 0.3. Recharge rates range between 150 mm/a below forest and 250 mm/a below agricultural land. Detailed descriptions of the hydrogeology can be found in Böttcher et al. (1990), Frind et al. (1990), Franken et al. (2009) and Houben et al. (2018).

The first RCW of the Fuhrberger Feld well field, Fuhrberg 3, with eight laterals, was installed in 1964 and has not been altered since. The second well, Fuhrberg 1, was originally installed in 1958 with ten laterals, which were closed and replaced in 2011. The ten new laterals were installed on two levels, four being roughly 2 m higher than the remaining six. All information concerning the dimensions of the collector wells is given in Table 1. The hydraulic conductivity was calibrated manually to

Table 2 Parameters for numerical models in Fig. 4

Parameter	Value
Hydraulic conductivity (m/day)	10
Lateral length (m)	36
Caisson radius (m) (uniform- and variable-flux cases only)	1
Lateral angles (from vertical) (radians)	0, $\frac{\pi}{6}$, $\frac{\pi}{3}$ and $\frac{\pi}{2}$
Pumping rate (m ³ /day)	1156
Radius of laterals (m) (uniform-head case only)	0.2

fit the observed data, and the calibrated values can also be found in Table 1.

The two collector wells are surrounded by observation wells at varying depths (10–26 m below ground) with screen lengths 1–10 m. The wells are in near-constant use, but flow rates vary. Prior to measuring groundwater level in the observation wells, the pumping rate had been held constant for 24 h and, therefore, steady-state conditions were assumed. This is a reasonable assumption given that pumping had been continuous and the hydraulic conductivity of the aquifer is high. The head in the caisson was used as a reference head, rather than static water level, due to the difficulties in determining the static water table in a well field. Maximum drawdown at Fuhrberg 3 is 10% of the aquifer thickness, but at Fuhrberg 1 it is 22%. Hantush and Papadopoulos (1962) state that the drawdown must be $\leq 25\%$ of aquifer thickness, when applying their equation to an unconfined aquifer. Fuhrberg 3 is, therefore, very close to the limit of applicability.

Turbulent losses along the laterals were estimated with the Darcy-Weisbach equation (Weisbach 1845) (see ‘Appendix’ for estimation of the friction factor):

$$\Delta h = f_D \frac{L_l}{D} \frac{u^2}{2g} \quad (17)$$

where Δh is head loss [L], f_D is the Darcy friction factor, g is gravitational acceleration [$L T^{-2}$], u is the mean flow velocity in the pipe [$L T^{-1}$] and D is the hydraulic diameter of the lateral [L].

The spot loss incurred as water flows from the laterals into the caisson was estimated as follows (Munson et al. 1998, cited in Bakker et al. 2005; Lee et al. 2010):

$$\Delta h = \frac{u^2}{2g} \quad (18)$$

Table 1 Description of the two radial collector wells

Well	Number of laterals	Lateral radius (m)	Lateral length (m)	Screened length (m)	Caisson radius (m)	Pumping rate (m ³ /h)	Aquifer hydraulic conductivity ^a (m/day)
Fuhrberg 1	10	0.125	60	45	2	445	33
Fuhrberg 3	8	0.1	39.5	34.5	2	445	95

^a Calibrated parameter

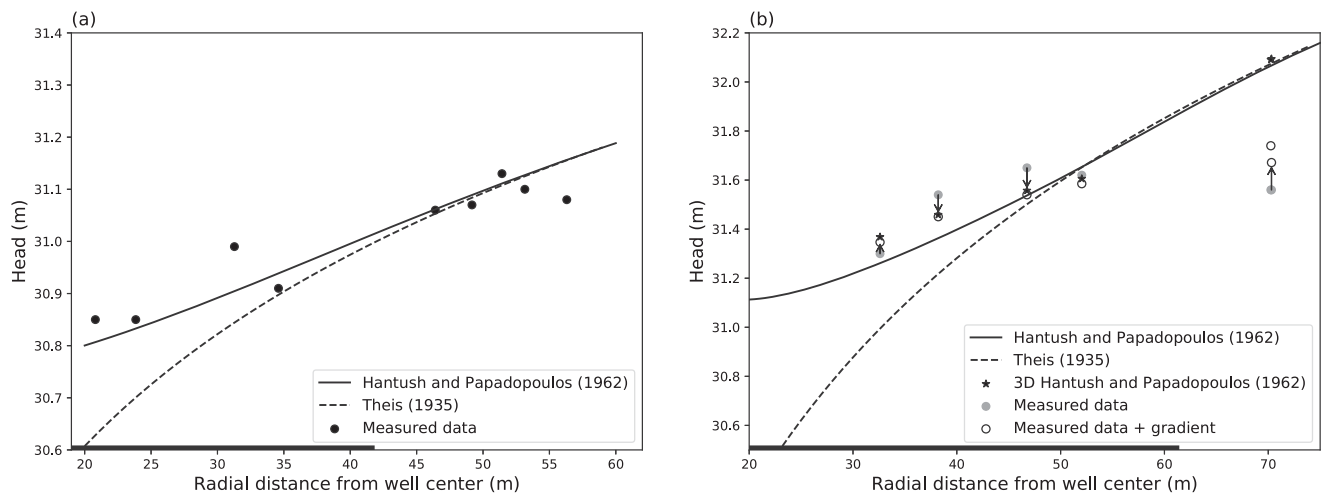



Fig. 2 Observed head data against the Hantush and Papadopoulos (1962) analytical model and the Theis (1935) equation for **a** Fuhrberg 3 and **b** Fuhrberg 1 radial collector wells. Gradient in **b** refers to a hydraulic gradient south–north of 0.0076. Solid black line along x axis shows lateral length

The equation is derived from the Bernoulli equation by assuming $u \rightarrow 0$ within the caisson.

Numerical model

The numerical code FEFLOW (Diersch 2014) was used to test the assumption of uniform screen inflow. The 2D model comprises a regular, square 70×70 m grid (i.e. $0 \leq x \leq 70, 0 \leq y \leq 70$) with a spatial discretization of 0.5 m and fixed head boundaries at $y = 70$ m and $x = 70$ m. The laterals were created with the well boundary condition and, as such, are effectively a series of point sinks with varying strengths. The other parameters can be found in Table 2.

Fig. 3 Measured flow velocities and specific flow rates in two laterals of a radial collector well in Tegel-Scharfenberg, Berlin, Germany, in 1956 (modified after Krems 1972) (©BGR)

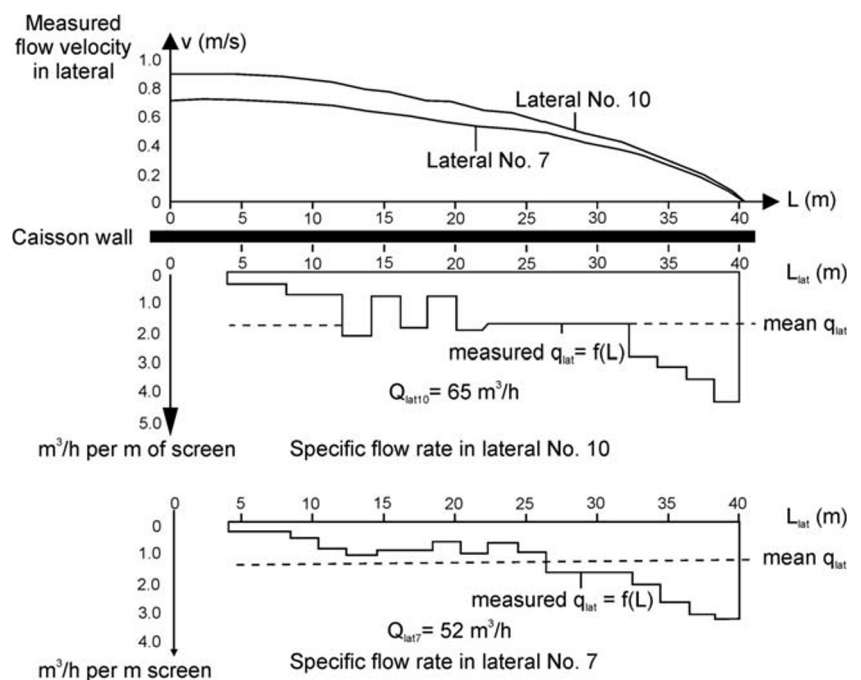

Results

Comparison of analytical models with field data

The models of Hantush and Papadopoulos (1962) and Theis (1935) were compared with groundwater level observations around two RCWs in the Fuhrberger Feld well field. Figure 2a compares observed heads around Fuhrberg 3 against the models of Hantush and Papadopoulos (1962) and Theis (1935). Hantush and Papadopoulos’s (1962) 3D model is solved at a z plane equal to the average mid-point of the screened depth of the piezometers (10.7 m below ground). The angle at which the equation is solved has little effect on the result (< 0.01 m difference in head). There is a good fit between the observations and the Hantush and

Papadopoulos (1962) model (Fig. 2a). From ~30 m from the center of the caisson, the difference between the two analytical models is less than 10 cm, and at the tips of the laterals the more complex Hantush and Papadopoulos (1962) model provides no advantage over the vertical well equation. Figure 2b shows the same comparison for Fuhrberg 1. The Hantush and Papadopoulos (1962) model provides a good fit to the observations, apart from the two measurements furthest away from the well center (70 m from center), which are overestimated. The calibrated hydraulic conductivity is much smaller than that of Fuhrberg 3 (33 vs. 95 m/day), which could be artificially low because the drawdown is relatively large with respect to the saturated thickness (~22%). The hydraulic conductivity at Fuhrberg 1 is, however, closer to that previously estimated for the aquifer (45 m/day).

Whereas Fuhrberg 3 is on the edge of the well field with no direct neighbors, Fuhrberg 1 is within the well field and surrounded by other wells. The pattern in the observations suggests that the heads could be affected by these neighboring wells. If a hydraulic gradient in the direction south–north of 0.0076 obtained from Eq. (19) is superimposed over the observed data, the model is able to reproduce the pattern of the observations close to the caisson (Fig. 2b):

$$\Delta h_{\text{lat}} = -\frac{y q_y}{K} \quad (19)$$

where Δh_{lat} is the head “correction” from lateral groundwater flow and q_y is the Darcy flux in the y direction.

The model is still unable to reproduce the two observations furthest away from the caisson, and this is likely because of the effect of other wells. Given this, the vertical well model is of little value here, as it provides a reasonable estimate of only the two groundwater levels ~50 m from the caisson.

The uniform-flux assumption

For the sake of mathematical simplicity, many RCW models, including that of Hantush and Papadopoulos (1962), assume that the flux (discharge from the aquifer per unit length along the well) is uniformly distributed along the screen (e.g., Hantush 1964; Cleveland 1994; Zhan 1999; Zhan et al. 2001). It is generally agreed that the use of a uniform-head boundary to simulate an HW is closer to physical reality, but this boundary is difficult to incorporate in analytical studies (Rosa and Carvalho 1989). The few available flowmeter measurements in real and physical model wells show that the uniform-flux assumption is probably rarely valid. Krems (1972) used a flowmeter to measure flow along the length of two laterals of an RCW. He found that influx is highest at the tip of the lateral, being more than eight times higher than that close to the caisson wall and more than two times higher than the average flux (Fig. 3). Given that the Hantush and Papadopoulos (1962) model compares well with field data (Fig. 2a), it is interesting to see how the uniform-flux boundary differs from uniform head or variable flux based on this field example.

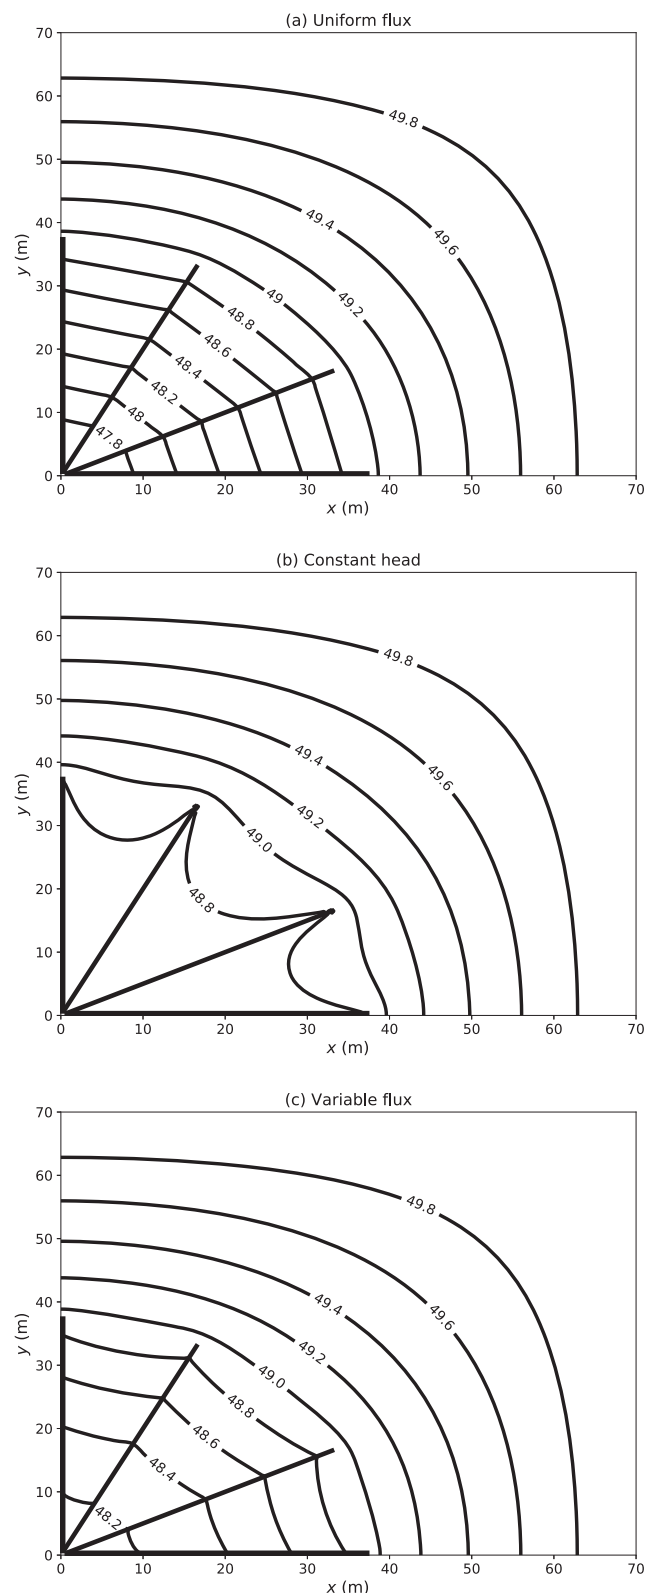


Fig. 4 Hydraulic head (m) around four laterals of a radial collector well with **a** uniform-flux, **b** constant head and **c** variable-flux boundary conditions

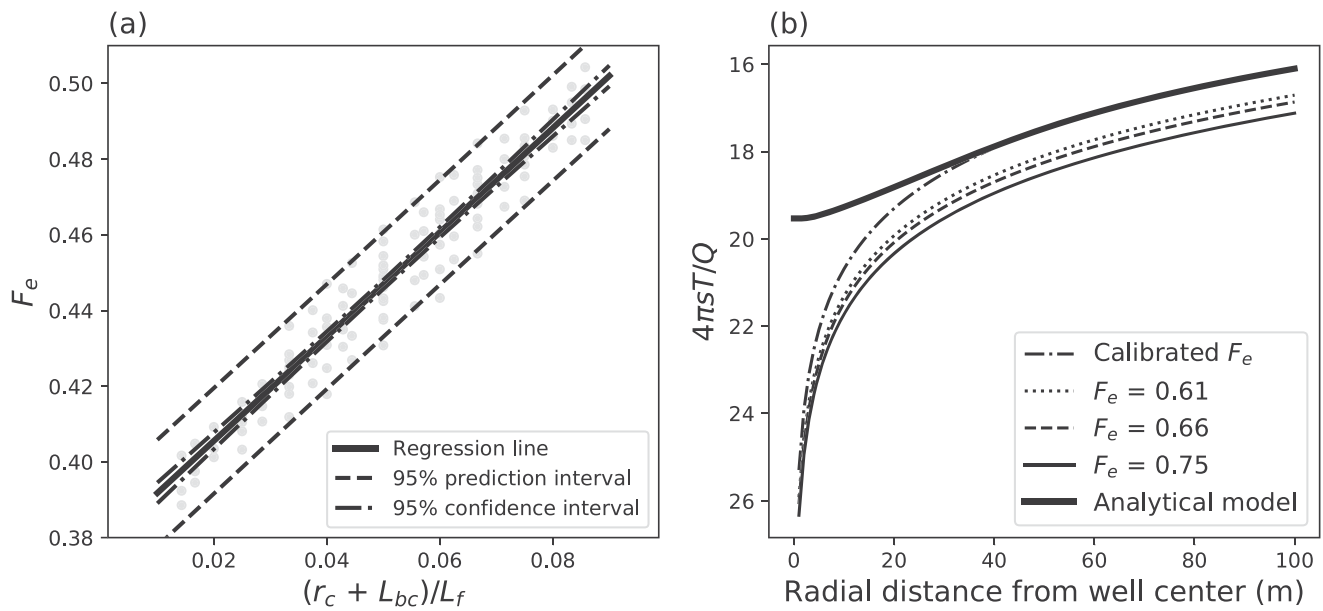


Fig. 5 **a** Correlation between the ratio of the caisson radius and unscreened lateral length ($r_c + L_{bc}$) to the length of the laterals (L_f) and the correction factor (F_e) and line of least squares. Dashed lines represent 95% confidence intervals for the mean F_e and 95% prediction intervals for a single future observation (Student’s t -distribution). **b** Dimensionless

drawdown against distance from the center of the caisson (x) for an analytical model (Hantush and Papadopoulos 1962) and the ersatzradius method. “Calibrated F_e ” refers to dimensionless drawdown calculated with Eq. (21). T transmissivity; Q pumping rate; s drawdown

To visualize the likely drawdown around the RCW in Fig. 3, the measured specific flow rates (lateral 10) were digitized and applied to four lateral arms in the 2D steady-state numerical model described in section ‘Numerical model’ and Table 2. Two further identical models with the same total pumping rate were created: in the first, the total pumping rate was distributed evenly among the point sinks, and, in the second, the total pumping rate was assigned to a single node at the caisson ($x = 0, y = 0$) and the laterals were represented with discrete features (i.e. a dual-continuum approach). The former demonstrates the uniform-flux boundary condition and the latter is an approximation of the uniform-head boundary condition. The Hagen–Poiseuille equation, which estimates head loss for laminar flow through a pipe, was applied to the discrete features. Turbulent pipe losses were not considered. In the uniform- and variable-flux cases, the cells in the bottom left corner were assigned a hydraulic conductivity of 1×10^{-4} m/day, creating a caisson of very roughly 1 m radius (imperfect because square grid cells were used); for the uniform-head approximation, discrete features were connected directly to the well node (Fig. 3b). All three models were appropriately converged: the average errors in hydraulic head were 2.1×10^{-5} , 1.26×10^{-6} and 3.5×10^{-7} m for the constant-head, variable-flux and constant-flux models, respectively.

Figure 4 compares drawdown around an RCW for three boundary conditions along the laterals: uniform flux, uniform head and flux varying according to observed data. The boundary condition affects drawdown only between

the laterals, with all three models converging just beyond the tips of the laterals. Although data from only a single RCW are used here, these results suggest that the uniform-flux and constant head boundaries are two extremes and that the reality is likely somewhere in between. This result was also changed by neither moving the boundaries further away from the well nor changing the hydraulic conductivity over three orders of magnitude. The fact that the drawdown distribution created from flowmeter data is not closer to the uniform-head case suggests that turbulent losses within the laterals, which were not considered here, are significant. Although an improvement on the vertical well approximation, the Hantush and Papadopoulos (1962) model will likely overestimate maximum drawdown.

Table 3 Parameters for Hantush and Papadopoulos (1962), Williams (2013) and Theis (1935) comparisons in Figs. 6 and 7

Parameter	Value
Aquifer thickness (m)	60
Specific storage (/m)	1×10^{-5}
Hydraulic conductivity (m/day)	20
Pumping rate (m^3/day)	6,000
Lateral length (m)	40 m
Angles of laterals (radians)	$0, \frac{\pi}{3}, \frac{2\pi}{3}, \pi, \frac{4\pi}{3}, \frac{5\pi}{3}$
Caisson radius (m)	1
Time since onset of pumping (days)	365

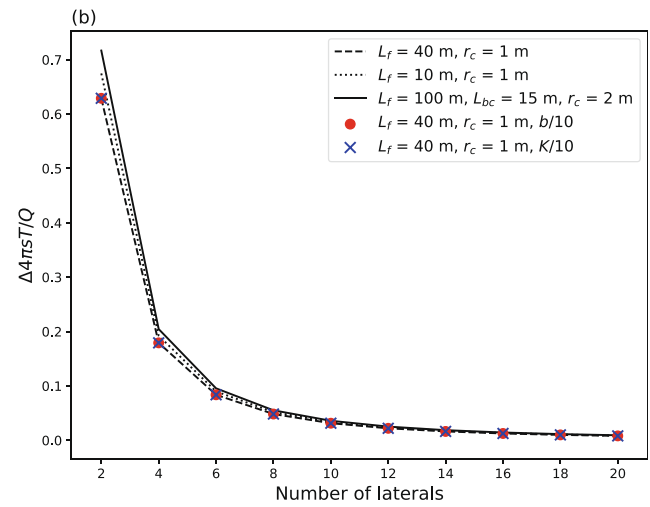
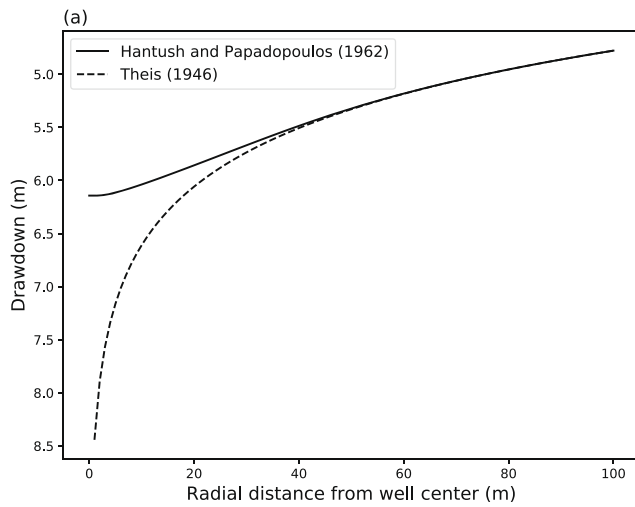


Fig. 6 **a** Drawdown around a radial collector well in a confined aquifer according to the 2D Hantush and Papadopoulos (1962) equation and the Theis (1935) equation for drawdown around a fully penetrating vertical well. Drawdown is along the $y=50$ m plane in Fig. 7. **b** Difference in

dimensionless drawdown between Hantush and Papadopoulos (1962) and Theis (1935) equations at the tip of the lateral for different numbers of laterals. Parameters are listed in Table 3

Vertical well approximation

The ersatzradius method is rather crude, as it simply replaces the well radius by an empirically corrected average lateral length; however, as can be seen in Fig. 2a, the Theis (1935) equation is capable of estimating drawdown around an RCW. The ersatzradius approach can be improved upon by assuming the correction factor is a linear function of the ratio of the

radius of the caisson to the length of the lateral, that is:

$$F_c = a \frac{(r_c + L_{bc})}{L_f} + b \tag{20}$$

where a and b are parameters to be calibrated, and the length of the unscreened lateral is added to the caisson radius. A script was written in Python for comparing drawdown against radial distance from the center of the caisson (directly above a lateral) for the ersatzradius and 2D Hantush and Papadopoulos (1962) approaches. Parameters a and b were calibrated using the quasi-Newton optimisation method of Broyden, Fletcher, Goldfarb and Shanno implemented in the *Scipy* package (*optimize.minimize*; Nocedal and Wright 2006) by minimizing the root mean square error between the two methods for distances greater than $0.75 L_l$, the point at which the solutions converge. The calibration was repeated for realistic collector well configurations: 6–12 laterals; lateral length 10–100 m; and combined caisson radius and unscreened lateral length 1–6 m.

Figure 5a shows a good correlation between $(r_c + L_{bc})/L_f$ and F_c ($r^2 = 0.97$) for the selected collector well configurations. The equation of the least squares regression line is as follows:

$$F_c = 1.327 \frac{(r_c + L_{bc})}{L_f} + 0.38 \tag{21}$$

Whereas the correction factors in the literature apply for only a narrow range of caisson radii and lateral lengths, this new equation is able to mimic the 2D Hantush and

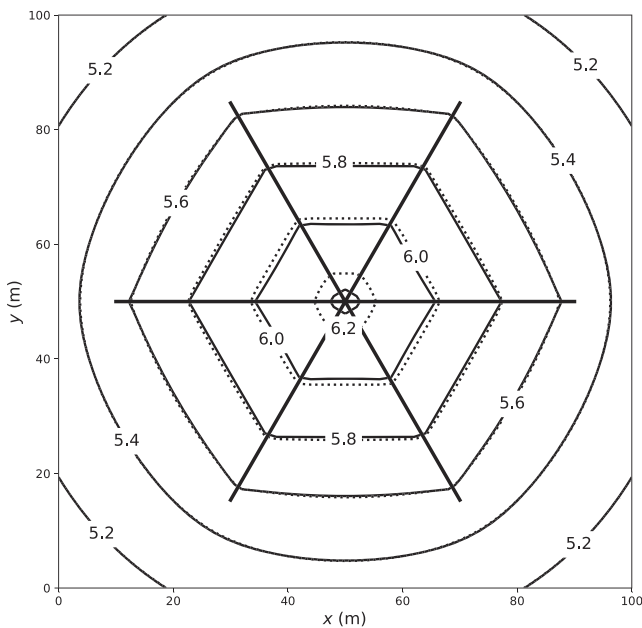


Fig. 7 Drawdown (m) around a radial collector well in a confined aquifer according to Hantush and Papadopoulos (1962) (solid line) and Williams (2013) (dotted line). Parameters can be found in Table 3. The laterals are represented by thick solid lines

Papadopoulos (1962) analytical solution from radial distances of $0.75 L_1$ for a range of collector well setups (e.g. Fig. 5b). However, if this equation were used in practice with observed drawdown in the caisson set to the drawdown at $r_c + L_{bc}$, the equation would likely overestimate drawdown. This is because the model was calibrated to a 2D analytical model with drawdown at $r_c + L_{bc}$ set equal to the maximum 2D drawdown—i.e. the drawdown that would be measured in a fully penetrating observation well at the face of the caisson—which is lower than drawdown inside the caisson. For the Fuhrberg sites, this error would be less than 5%; however, the error would increase above 10% for thick aquifers (>60 m) or short laterals (ca. <30 m, dependent on $r_c + L_{bc}$).

Hantush (1964) stated that at a distance of $r > 5 (r_c + L_{bc} + L_f)$ from an RCW of at least two laterals, drawdown can be described with the Theis (1935) equation without correction. If laterals are arranged symmetrically around a caisson, as the number of laterals increases, the drawdown should approach that which would be observed around a vertical well. An RCW with an infinite number of laterals is simply a vertical well, if viewed in 2D. For the RCW described in Table 3, the Theis (1935) and 2D Hantush and Papadopoulos (1962) models converge at the tips of the laterals ($L_f = 40$ m; Fig. 6a). Moreover, Fig. 6b shows the relationship between the number of laterals and the difference between the two models at the tip of the lateral. For RCWs with at least six laterals the error in dimensionless drawdown becomes very small. As can be seen in Fig. 6b, the error is insensitive to the configuration of the RCW, the aquifer thickness and the hydraulic conductivity.

The choice of appropriate model, of course, depends on the question being asked. Whereas the 3D Hantush and Papadopoulos (1962) model is likely most appropriate for estimating the maximum drawdown, simply replacing the RCW with a fully penetrating vertical well would be appropriate for simulating the impact of an RCW or HW on the aquifer groundwater head field. For estimating aquifer parameters in a pumping test, if observation wells are not in the direct vicinity of the well, the Theis (1935) equation could be used.

Software tool for analytical models

The complexity of the 3D Hantush and Papadopoulos (1962) model probably deters many practitioners working with HWs from using it; therefore, a simple piece of software, called HORI, was created from the scripts written for this study. Although written in MATLAB (MATLAB 2016a, The MathWorks, Inc., Natick, MA, USA), a MATLAB license or knowledge of programming is not required to use the software, provided that the user downloads a runtime from the MATLAB

homepage (MathWorks 2019). A graphical user interface allows the user to implement not only the models of Hantush and Papadopoulos (1962) in 2D or 3D, but also Williams's (2013) model for an RCW or slant well. Help can be found by clicking on the 'info' button. The software is freely available (Collins 2020).

Figure 7 shows a comparison of the 2D Hantush and Papadopoulos (1962) and the Williams (2013) methods in a confined aquifer, calculated with HORI (see Table 3 for parameters). For the Williams (2013) approach, the total pumping rate was distributed evenly among 20 point sinks along each lateral. The two methods produce almost identical drawdown distributions, differing slightly only very close to the caisson.

Conclusions

Comparisons in the literature between analytical models of HW/RCWs and field data are limited, and, to the authors' knowledge, there have been no comparisons of flowmeter data from inside an RCW with models. It has been shown here that these analytical models can perform well. Numerical modelling with flowmeter data suggests that the uniform-flux boundary condition is a reasonable assumption and representing the lateral as a constant-head boundary would not necessarily improve modelled heads close to the caisson, as previously assumed. It should be noted, however, that the field data in this paper all relate to radial collector wells and that the uniform-flux boundary may break down in very long horizontal or slant wells. Future work could investigate the appropriateness of using the Williams (2013) model in these cases. It has also been shown that approximating drawdown around an RCW with a vertical well equation is probably sufficient in some circumstances. In particular, the Theis (1935) vertical well equation is suitable for estimating aquifer properties from a pumping test, if observed groundwater levels at $r > L_f + r_c$ are available and drawdown is not affected by other wells. A MATLAB application with graphical user interface, HORI, has been developed to aid practitioners in calculating drawdown around an RCW with the Hantush and Papadopoulos (1962) and Williams (2013) methods.

Acknowledgements Collins publishes with the permission of the Executive Director of the British Geological Survey.

Appendix

Friction factor for turbulent flow is calculated as follows (Romeo et al. 2002):

$$\frac{1}{\sqrt{f}} = -2.0 \log \left(\frac{\varepsilon}{3.7065 D} - \frac{5.0272}{\text{Re}} \log \left(\frac{\varepsilon}{3.827 D} - \frac{4.567}{\text{Re}} \log \left(\left(\frac{\varepsilon}{7.7918 D} \right)^{0.9924} + \left(\frac{5.3326}{208.815 + \text{Re}} \right)^{0.9345} \right) \right) \right) \quad (22)$$

where ε is the roughness coefficient and Re is the Reynolds number, which for water flow through a pipe is:

$$\text{Re} = \frac{u D}{\nu} \quad (23)$$

where ν is kinematic viscosity [$\text{L}^2 \text{T}^{-1}$] and u is the fluid velocity [L T^{-1}]. The roughness of the lateral wall, ε , was assumed to be 0.03, as used by Lee et al. (2010).

Open Access This article is licensed under a Creative Commons Attribution 4.0 International License, which permits use, sharing, adaptation, distribution and reproduction in any medium or format, as long as you give appropriate credit to the original author(s) and the source, provide a link to the Creative Commons licence, and indicate if changes were made. The images or other third party material in this article are included in the article's Creative Commons licence, unless indicated otherwise in a credit line to the material. If material is not included in the article's Creative Commons licence and your intended use is not permitted by statutory regulation or exceeds the permitted use, you will need to obtain permission directly from the copyright holder. To view a copy of this licence, visit <http://creativecommons.org/licenses/by/4.0/>.

References

- Bakker M, Kelson VA, Luther KH (2005) Multilayer analytic element modeling of radial collector wells. *Ground Water* 43(6):926–934
- Beljin MS, Losonsky G (1992) HWELL: a horizontal well model. In: Solving groundwater problems with models. International Groundwater Modeling Center and the Association of Groundwater Scientists and Engineers, Golden, CO, pp 45–54
- Birch S, Donahue R, Biggar K, Segó D (2007) Prediction of flow rates for potable water supply from directionally drilled horizontal wells in river sediments. *J Environ Eng ASCE* 6:683–688
- Bischoff H (1981) An integral equation method to solve three-dimensional flow to drainage systems. *Appl Mathem Modell* 5: 399–404
- Böttcher J, Strelbel O, Voerkelius S, Schmidt H-L (1990) Using isotope fractionation of nitrate-nitrogen and nitrate-oxygen for evaluation of microbial denitrification in a sandy aquifer. *J Hydrol* 114:413–425
- Chen C, Wan J, Zhan H (2003) Theoretical and experimental studies of coupled seepage-pipe flow to a horizontal well. *J Hydrol* 281(1–2): 159–171
- Cleveland TG (1994) Recovery performance for vertical and horizontal wells using semianalytical simulation. *Ground Water* 32(1):103–107
- Collins SL (2020) HORI v1.0 <https://doi.org/10.5281/zenodo.3706550>
- Cooper HH, Jacob CE (1946) A generalized graphical method for evaluating formation constants and summarizing well field history. *Trans Am Geophys Union* 27:526–534
- Cunningham WL, Bair ES, Yost WP (1995) Hydrogeology and simulation of ground-water flow at the south well field, Columbus, Ohio. *US Geol Surv Water Resour Invest* 95-4279
- Debrine BE (1970) Electrolytic model study for collector wells under river beds. *Water Resour Res* 6(3):971–978
- Diersch H-J (2014) Finite element modeling of flow, mass and heat transport in porous and fractured. Springer, Heidelberg, Germany
- Dimkić M, Pušić M, Vidović D, Isailović V, Majkić B, Filipović N (2011) Numerical model assessment of radial-well aging. *J Comput Civ Eng* 25(1):43–49
- Eberts SM, Bair ES (1990) Simulated effects of quarry dewatering near a municipal well field. *Ground Water* 28(1):37–47
- Falcke (1962) Modellversuche an Brunnen mit horizontalen Fassungsträngen unter besonderer Berücksichtigung der geometrischen und physikalischen Veränderlichen [Model experiments on wells with horizontal intakes with special emphasis on geometric and physical variables]. PhD Thesis. TH Karlsruhe, Karlsruhe, Germany
- Forchheimer P (1886) Über die Ergiebigkeit von Brunnen-Anlagen und Sickerschlitzten [On the yield of well fields and drainage trenches]. *Zeitschrift des Architekten- und Ingenieur-Vereins zu Hannover* 32(7):540–564
- Franken G, Postma D, Duijnsveld WHM, Böttcher J, Molson J (2009) Acid groundwater in an anoxic aquifer: reactive transport modelling of buffering processes. *Appl Geochem* 24(5):890–899
- Frind EO, Duijnsveld WHM, Strelbel O, Böttcher J (1990) Modeling of multicomponent transport with microbial transformation in groundwater: the Fuhrberg case. *Water Resour Res* 26:1707–1719
- Haitjema H, Kuzin S, Kelson V, Abrams D (2010) Modeling flow into horizontal wells in a Dupuit-Forchheimer model. *Ground Water* 48(6):878–883
- Hantush MS (1957) Nonsteady flow to a well partially penetrating an infinite leaky aquifer. *Proc Iraq Sci Soc* 1:10–19
- Hantush MS (1964) Hydraulics of wells. In: Chow VT (ed) *Advances in hydroscience*, vol I. Academic, New York, pp 282–432
- Hantush MS, Jacob CE (1955) Steady three-dimensional flow to a well in a two layered aquifer. *Trans Am Geophys Union* 36:286–292
- Hantush MS, Papadopulos IS (1962) Flow of ground water to collector wells. *J Hydraul Div* 88(5):221–224
- Houben GJ, Koeniger P, Schloemer S, Gröger-Trampe J, Stülfenfuß J (2018) Comparison of depth-specific groundwater sampling methods and their influence on hydrochemistry, water isotopes and dissolved gases: experiences from the Fuhrberger Feld, Germany. *J Hydrol* 557:182–196
- Huang CS, Chen YL, Yeh HD (2011) A general analytical solution for flow to a single horizontal well by Fourier and Laplace transforms. *Adv Water Resour* 34:640–648
- Huang CS, Tsou PR, Yeh HD (2012) An analytical solution for a radial collector well near a stream with a low-permeability streambed. *J Hydrol* 446:48–58
- Huang CS, Chen JJ, Yeh HD (2015) Analysis of three-dimensional groundwater flow toward a radial collector well in a finite-extent unconfined aquifer. *Hydrol Earth Syst Sci* 12:7503–7540
- Hunt B (2005) Flow to vertical and nonvertical wells in leaky aquifers. *J Hydrol Eng* 10:477–484
- Kelson V (2012) Predicting collector well yields with MODFLOW. *Ground Water* 50(6):918–926
- Kim SH, Ahn KH, Ray C (2008) Distribution of discharge intensity along small diameter collector well laterals in a model riverbed filtration. *J Irrig Drain E ASCE* 134(4):493–500
- Kordas B (1961) Contribution à l'étude des puits à drains rayonnants [Contribution to the study of shaft wells with radial drains]. Ninth Conference Int. Assoc. Hydraul Res (IAHR), Dubrovnik, Croatia, 1961, pp 581–590

- Kotowski A (1982) Modelowanie fizyczne infiltracyjnych ujęć promienistych wody [Physical modeling of the infiltration of water into radial collector wells]. *Archiwum Hydrotech* 29(3):219–240
- Kotowski A (1983) Badania modelowe wpływu uszczelnienia dna źródła infiltracji na działanie ujęć promienistych wody [Model studies on the influence of the colmation of the infiltration source floor on the efficiency of radial collector wells]. *Archiwum Hydrotech* 30(3):175–191
- Kotowski A (1985) Modellversuche über Horizontalfilterbrunnen bei geringer Grundwassermächtigkeit [Model experiments on radial collector wells at small groundwater thickness]. *GWF Wasser/Abwasser* 129(12):804–810
- Kotowski A (1988) Modellversuche mit einem Horizontalfilterbrunnen, dessen Filterrohre unter einem Infiltrationsbecken liegen [Model experiments with a horizontal well with laterals underneath the bottom of an infiltration pond]. *GWF Wasser/Abwasser* 129(12):804–810
- Krems G (1972) Studie über Brunnenalterung [Study on well aging]. Technical report, German Federal Ministry of the Interior, Water Resource Management Dept., Berlin
- Lee E, Hyun Y, Lee KK (2010) Numerical modeling of groundwater flow into a radial collector well with horizontal arms. *Geosci J* 14(4):403–414
- Lee E, Hyun Y, Lee K-K (2012) Hydraulic analysis of a radial collector well for riverbank filtration near Nakdong River, South Korea. *Hydrogeol J* 20(3):575–589
- Luther KH, Haitjema HM (1999) An analytic element solution to unconfined flow near partially penetrating wells. *J Hydrol* 226:197–203
- MathWorks (2019) MATLAB for Artificial Intelligence. <https://mathworks.com>. Accessed December 2019
- McWhorter D, Sunada D (1977) Groundwater hydrology and hydraulics. Water Resources, Littleton, CO
- Mikels FC, Klaer FH (1956) Application of ground water hydraulics to the development of water supplies by induced infiltration. In: *Symposia Darcy*, vol 2, pp 232–242, International Association of Hydrological Sciences, Dijon, France
- Milojevic M (1961) Interference of radial collector wells adjacent to the river bank. *Symposium International Association of Scientific Hydrology “Groundwater in the arid zones”*, Athens, October 11–21, 1961
- Milojevic M (1963) Radial collector wells adjacent to the river banks. *J Hydraul Div* 89(6):133–151
- Mohamed A, Rushton K (2006) Horizontal wells in shallow aquifers: field experiment and numerical model. *J Hydrol* 329:98–109
- Munson BR, Young DF, Okiishi TH (1998) *Fundamentals of fluid mechanics*, 3rd edn. Wiley, Chichester, UK
- Nocedal J, Wright SJ (2006) *Numerical optimization*. Springer, New York
- Nöring F (1953) Geologische und hydrologische Voraussetzungen für Horizontalfilterbrunnen [Geological and hydrogeological prerequisites for radial collector wells]. *WF Wasser/Abwasser* 107(32):605–612
- Ophori DU, Farvolden RN (1985) A hydraulic trap for preventing collector well contamination: a case study. *Ground Water* 23(5):600–610
- Patel HM, Eldho TI, Rastogi AK (2010) Simulation of radial collector well in shallow alluvial riverbed aquifer using analytic element method. *J Irrig Drain Eng* 136(2):107–119
- Polubarinova-Kochina P (1955) Zadacha o sisteme gorizontal'nykh skvazhin [The problem of the horizontal well system]. *Archiwum Mechaniki Stosowanej Polska Akademia Nauk* 7(3):287–300
- Romeo E, Royo C, Monzón A (2002) Improved explicit equations for estimation of the friction factor in rough and smooth pipes. *Chem Eng J* 86:369–374
- Rosa AJ, Carvalho RDS (1989) A mathematical model for pressure evaluation in an infinite-conductivity horizontal well. *SPE Formation Eval* 4(4):559–566
- Sun D, Zhan H (2006) Flow to a horizontal well in an aquitard-aquifer system. *J Hydrol* 321(1–4):364–376
- Theis CV (1935) The relation between the lowering of the piezometric surface and the rate and duration of discharge of a well using ground-water storage. *Eos Trans Am Geophys Union* 16(2):519–524
- Thiem A (1870) Die Ergiebigkeit artesischer Bohrlöcher, Schachtbrunnen und Filtergalerien [The yield of artesian boreholes, shaft wells and filter galleries]. *J Gasbeleucht Wasserversorg* 13:450–467
- Weisbach J (1845) *Lehrbuch der Ingenieur- und Maschinen-Mechanik* [Textbook of engineering and machine mechanics]. Friedrich Vieweg, Braunschweig, Germany
- Williams D (2013) Drawdown distribution in the vicinity of nonvertical wells. *Groundwater* 51:745–751
- Yeh HD, Chang YC (2013) Recent advances in modeling of well hydraulics. *Adv Water Resour* 51:27–51
- Zhan H (1999) Analytical study of capture time to a horizontal well. *J Hydrol* 217(1):46–54
- Zhan H, Park E (2003) Horizontal well hydraulics in leaky aquifers. *J Hydrol* 281:129–146
- Zhan H, Wang LV, Park E (2001) On the horizontal-well pumping tests in anisotropic confined aquifers. *J Hydrol* 252(1–4):37–50